

2026 MANUAL

LED LIGHTS MANUAL



SINCE 1995



ALADDIN- LIGHT UP YOUR LIFE

About Us

For more than three decades, Aladdin Lighting has been a prominent player in the global lighting market, known for our seamless integration of industry and trade. As a leading manufacturer and exporter of high-quality LED lighting products, we have established ourselves as a trusted partner to clients across the globe.

Our Products

At Aladdin Lighting, we specialize in a comprehensive range of LED lighting solutions, designed to meet the diverse needs of our global clients:

- **Light Sources:**Filament lamps, bulb lamps, lamp tubes, and more.
- **Indoor Lighting:**Ceiling lights, downlights, spotlights, moisture-proof lights, fan lights, etc.
- **Outdoor Lighting:**Floodlights, street lamps, solar outdoor lighting, and more.
- **Creative Products:**Cube sockets and small appliances that blend innovation with functionality.

Global Reach and Certification

Our products are not only innovative but also adhere to the highest quality standards. We have obtained UL, CE, RoHS, CB, SAA, and other international certifications, ensuring that our offerings meet global safety and performance benchmarks. Aladdin Lighting proudly serves markets across Europe, the Americas, Australia, the Middle East, Southeast Asia, and beyond. We have established long-term partnerships with renowned supermarkets and multinational enterprises such as ELICA, ACE, Auchan, and OBI.

Aladdin Lighting is driven by a steadfast commitment to quality, service, and Innovation.Our goal is to foster strong partnerships that contribute to the development and progress of the global lighting industry.

ENTERPRISE HISTORY OF ALADDIN INTRODUCTION

- 1995 ● Start-up factory named ZhenXing lighting, producing R7s halogen bulb.
- 2004 ○ Update to Changzhou Aladdin Lighting, beginning halogen bulb export.
- 2014 ● Focus on Filament led and SMD led bulb.
- 2016 ○ Enter the era of LED lighting.
- 2019 ● Established an overseas company in Uzbekistan , created own brand named ALADIN & AMIBABA.
- 2021 ○ Join Amazon platform and start lighting e-commerce business.
- 2022 ● Join Amazon platform and start lighting e-commerce business.The factory moved to Jiujiang City, Jiangxi Province, named ChangRui Lighting.
- 2023 ○ Cooperate with the Dutch Design Nest company. Develop creative lighting and home appliances.
- 2024 ● Set up a factory in Zhongshan, Guangzhou. Produce and manufacture outdoor lighting fixtures and fan lamps.
- 2025 ○ Expand sales team, develop new markets, and serve more customers.
- 2026 ● We are technology-centered, participating in engineering projects across different countries to deliver integrated services covering project solutions, design, and technology.

CONTENTS

LED INDOOR LIGHTING

Led Filament Bulb	1
Dimmable and Color Adjustable Led Filament Lamp	2
LED SMD Bulb	3
LED Smart Bulb	4
Super Slim Panel Light (Side Light)	5-6
Super Slim Panel Light (Back Light)	7
Led Big Panel Light	8
Slim Led Ceiling Light	9
Led Triproof Ceiling Light	10
Smart Slim Ceiling Light With Back Light	11
New Panel Light with Auxiliary Lighting	12
Led Ceiling Light	13-14
Led Botten Light	15
SMD 2835 12v/24v Led Strip Light	16
SMD 2216&2110 12v/24v Led Strip Light	17-18
SMD 3014&4020 12v/24v Led Strip--Side Light	19
SMD 5730 12v/24v Led Strip	20
SMD CCT Light Strip	21-22
SMD RGB CCT Light Strip	23-24
COB Light Strip	25-26
COB RGB&CCT Light Strip	27
SMD RGB&CCT Light Strip	28
High Voltage Led Light Strip	29

LED DECORATIVE LIGHTING

Alien Filament Lamp	31-32
Pendent Lamp	33-34

LED OUTDOOR LIGHTING

Triproof Light T8 Series	36
Triproof Light SMD Series(Side-clip Design)	37
Triproof Light SMD Series(Without Side Clips)	38
Tirproof Linear Lamp	39
Led Highbay Light	40
Led Bulkhead Lamp	41
Led Flood Light	42
LED Flood Light-Microwave Sensor Sty	43
Porch Wall Mount Exterior Led Lamp	44-45
Thin Square Waterproof Wall Lamp	46
Minimalist Waterproof Wall Lamp	47
Linear Waterproof Wall Lamp	48
Wall Light--Touch Switch Control	49
Led Marble&Iron Wall Lamp	50
Landscape Led Garden Lights	51
Led Street Light	52-53

SOLAR ENERGY

Rechargeable Flood Light	55
Led Solar Flood Light	56
Led Solar Street Light	57
Led Solar Camping Light	58
Led Solar Highbay Light	59
Led Solar Courtyard Wall Light	60

COMMERCIAL LIGHTING

Magic Series Magnetic Light	62-63
LED pendant light	64
Multi-Head Cob Led Downlight	65
Surface-mounted Adjustable Angle Downlight	66
LED Surface-mounted Downlight	67
Surface Mounted Foldable COB Downlight	68
COB Track Spotlight	69
Led COB Down Light	70
COB Die Casting Led Downlight	71
LED Aluminum-Plastic Downlight	72
Led Die-casting Down Light	73
Led Down Light Frame	74
LED Downlight (MR16 GU10 Module)	75
Recessed Led Linear Light	76
Led Linear Pendant Light	77

FAN LIGHT

E27 Holder Fan Light	79
Bladeless Turbo Fan Light	80
Roller-type Bladeless Fan Light	81-82
Bedroom Ceiling Fan Light	83-84
Straight-blade Ceiling Fan Light	85-86

CREATIVE PRODUCT

Power Cube Socket	88
Power Cooker	89
Audio Cube	90
Heng Balance Lamp	91
More Trendy New Products	92-93

SPECIAL LIGHTING

Reptile Lighting Daytime Series	95
Fishing Light	96
Plant Lighting	97-98

LED INDOOR LIGHTING

Aladdin founded in1995



Led Filament Bulb




Product Description

LED filament lamps seamlessly integrate beauty with illumination, offering a visually stunning lighting experience while maintaining high performance. Currently boasting a maximum luminous efficacy of up to 210lm/W, these lamps lead the way in energy efficiency, reducing energy consumption and enhancing sustainability. Our company is equipped with a comprehensive range of solutions tailored to cater to the diverse needs of various markets, ensuring that every client finds the perfect fit for their unique requirements.


Product Dimension

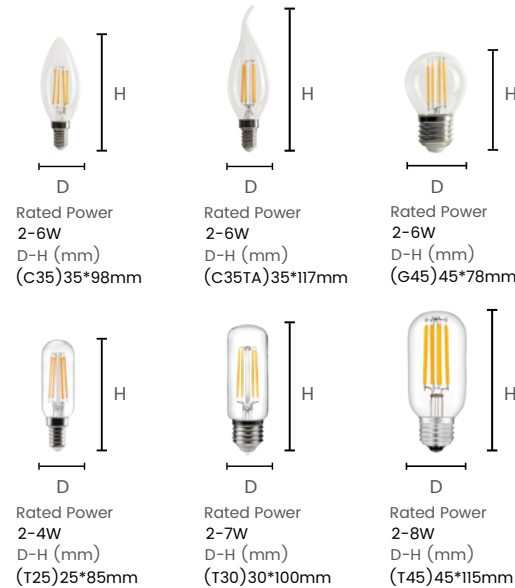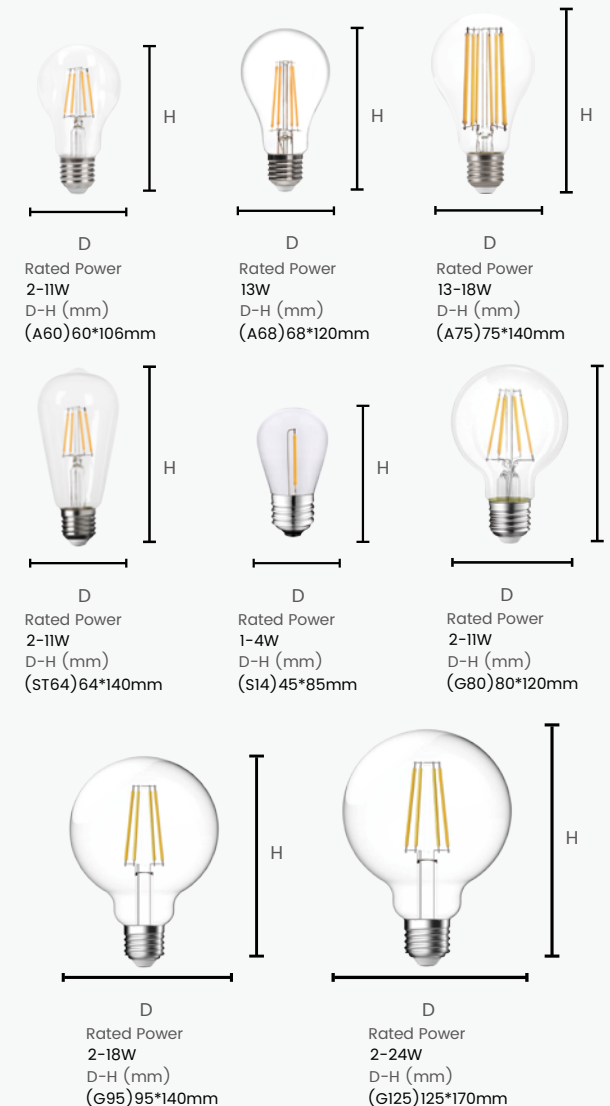


Technical Details



Basic Details

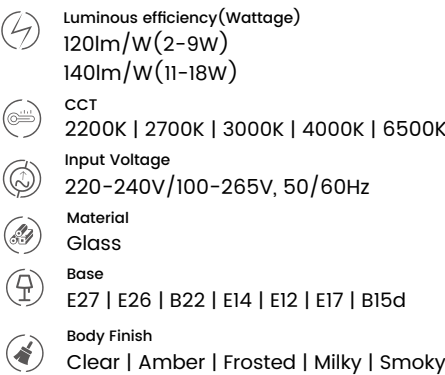

Optional selection--ADD Dimmable Modes

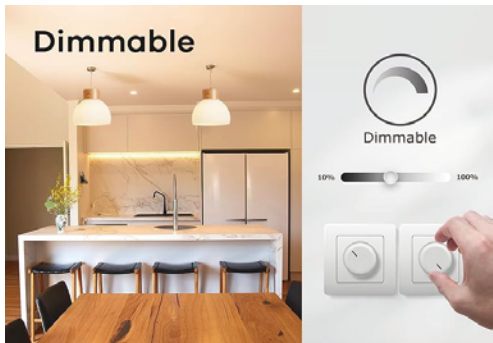


Dimmable and Color Adjustable Led Filament Lamp




Product Description

Designed to offer unparalleled versatility, this lamp not only supports seamless dimming but also dynamically adjusts its color temperature, ranging from a warm 2200K to a cool 6500K, effortlessly mimicking the transition of sunlight from dawn to dusk. This unique feature transforms your living spaces, creating ambiances tailored to your mood and the time of day. Boasting exceptional luminous efficiency, our LED Filament Lamp consumes significantly less energy compared to traditional incandescent bulbs, making it an eco-friendly and cost-effective choice for any home or office. By combining timeless aesthetics with cutting-edge LED technology, it represents the future of lighting – where elegance meets energy efficiency. Illuminate your life with the warmth and flexibility of our LED Filament Lamp today.


Product Dimension

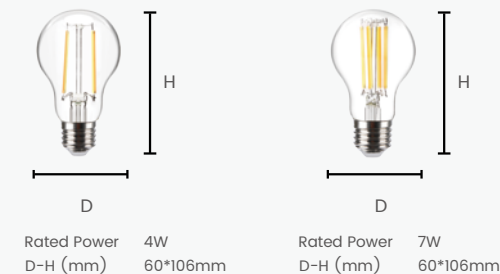

Installation effect display

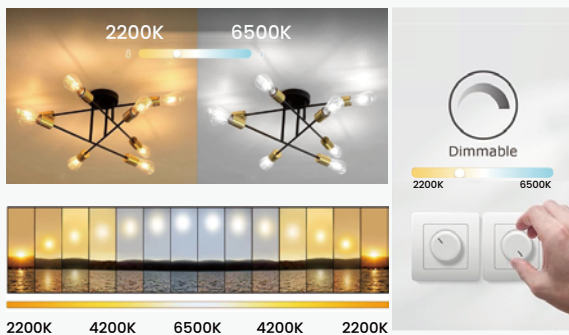

Technical Details




Basic Details



Light Distribution



Optional selection--3 Color Light Modes

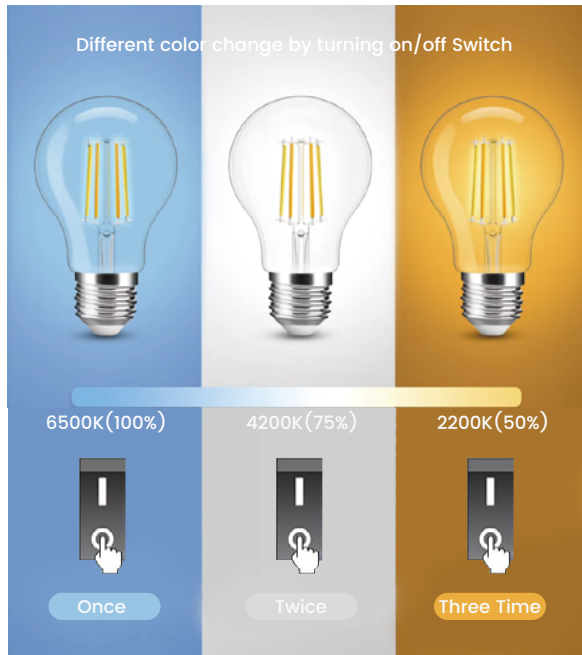


Led SMD Bulb



Product Description

SMD LED bulb are a type of energy-efficient lighting solution that combines the benefits of LED technology with a durable plastic and aluminum construction. These bulbs are designed to replace traditional incandescent and halogen bulbs, offering longer lifespan, reduced energy consumption, and improved light output. The plastic packaging protects the internal components while the aluminum base provides excellent heat dissipation, ensuring reliable performance and extended product life.

Product Dimension

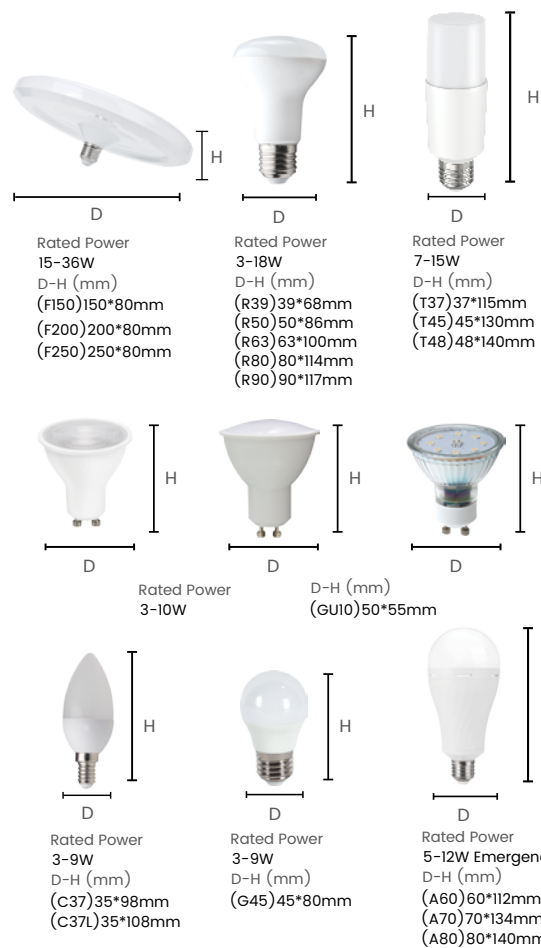

Technical Details

IP20 RoHS CB CE CRI≥280
30,000 Hrs | LM80 | B10

Basic Details

Energy efficiency level	Total main efficacy $\eta_{TM}(lm/W)$
A	$210 \leq \eta_{TM}$
B	$185 \leq \eta_{TM} < 210$
C	$160 \leq \eta_{TM} < 185$
D	$135 \leq \eta_{TM} < 160$
E	$110 \leq \eta_{TM} < 135$
F	$85 \leq \eta_{TM} < 110$
G	$\eta_{TM} < 85$

- CCT 3000K | 4000K | 6500K
- Input Voltage 220-240V/100-265V, 50/60Hz
- Material Plastic&Aluminium
- Body Finish White
- Base E27 | E26 | B22 | E14 | E12 | E17 | B15d


Led Smart Bulb



Product Description

LED Smart TUYA Bulb – a revolutionary lighting solution that fuses creativity with technology. Transform your space with vibrant, customizable colors and patterns, all controlled by your smartphone. Experience the future of illumination today.

Product Dimension

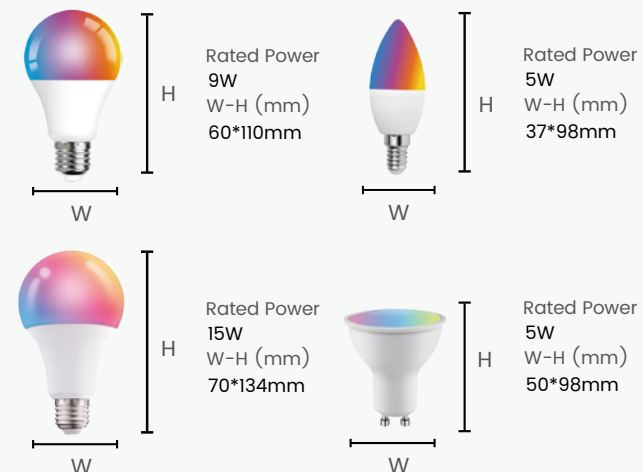

Installation method

Download "Tuya/Smart Life" app

Download on the APP Store | Get it on Google Play

WORKS WITH alexa | WORKS WITH Google

Register an account and choose your country.

1. Connect your phone to WiFi (Only 2.4Ghz)
2. Turn on the phone's WIFI/Bluetooth

Adjust the bulb to blink

Turn on/off 5 times (on/off/on/off/on)

Technical Details

IP20 RoHS CB CE CRI≥280
30,000 Hrs | LM80 | B10

Basic Details


- Wattage 5W | 9W | 15W
- Luminous efficiency 85lm/W
- CCT RGB+CCT



- Input Voltage 220-240V/100-265V, 50/60Hz
- Material Plastic&Aluminium
- Body Finish White
- Base E27 | E26 | B22 | E14 | E12 | E17 | B15d


Timing Function

Set time/countdown to turn on/off of the bulb

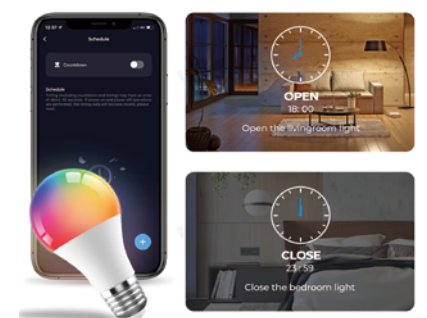

Super Slim Panel Light(Side Light)

NEW

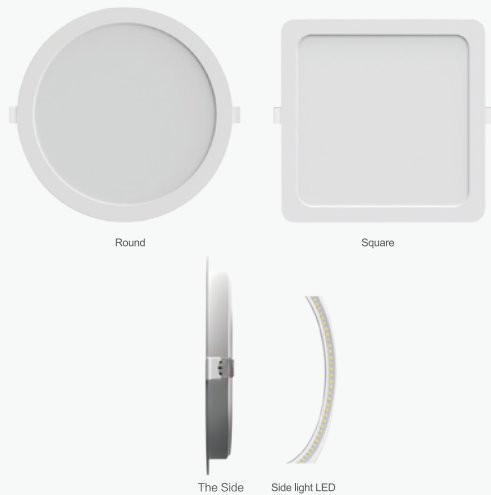

Product Description

The LED panel light features side-emitting technology, delivering a soft and uniform glow. It can be equipped with a surface-mounted frame, offering flexible installation options for both recessed and surface-mounted applications. With its ultra-thin profile, it seamlessly integrates into any interior design. Moreover, its excellent cost-performance ratio makes it an ideal choice for those seeking both quality and value.

Dimension

IC Driver

Rated Power	6W	Surface Cutout
D-H (mm)	128*14.8mm	Ø105-115mm
Rated Power	9W	Surface Cutout
D-H (mm)	145*15.8mm	Ø130-135mm
Rated Power	12W	Surface Cutout
D-H (mm)	170*15.8mm	Ø150-160mm
Rated Power	18W	Surface Cutout
D-H (mm)	225*16mm	Ø205-210mm
Rated Power	24W	Surface Cutout
D-H (mm)	300*16.3mm	Ø280-290mm
Rated Power	30W	Surface Cutout
D-H (mm)	300*16.3mm	Ø280-290mm

DOB IC Driver

Rated Power	5W	Surface Cutout
D-H (mm)	95*26mm	Ø75-90mm
Rated Power	9W	Surface Cutout
D-H (mm)	126*26mm	Ø90-110mm
Rated Power	12W	Surface Cutout
D-H (mm)	145*26mm	Ø120-135mm
Rated Power	18W	Surface Cutout
D-H (mm)	170*26mm	Ø140-160mm
Rated Power	24W	Surface Cutout
D-H (mm)	225*26mm	Ø190-210mm
Rated Power	30W	Surface Cutout
D-H (mm)	300*26mm	Ø270-290mm

IC Driver

Rated Power	6W	Surface Cutout
D-H (mm)	128*14.8mm	Ø105-115mm
Rated Power	9W	Surface Cutout
D-H (mm)	145*15.8mm	Ø130-135mm
Rated Power	12W	Surface Cutout
D-H (mm)	170*15.8mm	Ø150-160mm
Rated Power	18W	Surface Cutout
D-H (mm)	225*16mm	Ø205-210mm
Rated Power	24W	Surface Cutout
D-H (mm)	300*16.3mm	Ø280-290mm
Rated Power	30W	Surface Cutout
D-H (mm)	300*16.3mm	Ø280-290mm

DOB IC Driver

Rated Power	5W	Surface Cutout
D-H (mm)	95*26mm	Ø75-90mm
Rated Power	9W	Surface Cutout
D-H (mm)	120*26mm	Ø90-110mm
Rated Power	12W	Surface Cutout
D-H (mm)	145*26mm	Ø120-135mm
Rated Power	18W	Surface Cutout
D-H (mm)	170*26mm	Ø140-160mm
Rated Power	24W	Surface Cutout
D-H (mm)	225*26mm	Ø190-210mm
Rated Power	30W	Surface Cutout
D-H (mm)	300*26mm	Ø270-290mm

Technical Details

IP20 | 54 | RoHS | CB | CE | CRI≥80

30,000 Hrs | LM80 | B10

Basic Details

Wattage
5W | 9W | 12W | 18W | 24W | 30W

Luminous efficiency
85lm/w | 100lm/w


CCT
3000K | 4000K | 6500K

Input Voltage
165-265V, 50/60Hz


Material
Plastic

Body Finish
White


Light Distribution

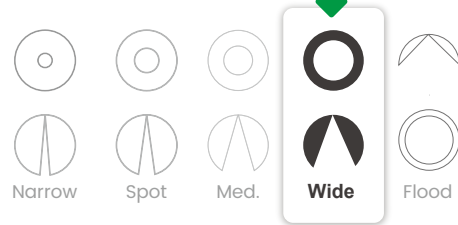

Mounting Information




Optional selection--Surface-mounted frame

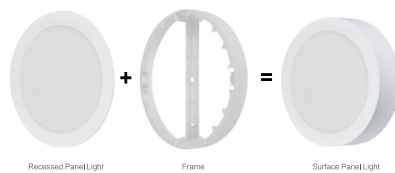


Circular/Square frame for lamp with IC Driver
Height 29mm

Circular/Square frame for lamp with DOB IC Driver
Height 32mm

Optional selection--CCT and Power adjustable

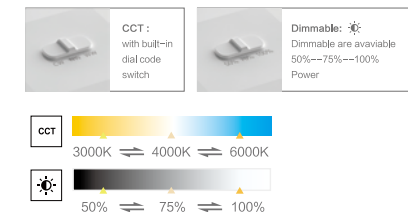

Super Slim Panel Light(Side Light)

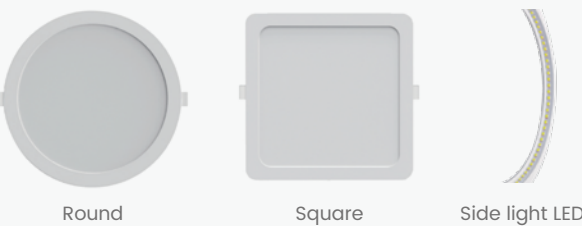

Product Description

The LED panel light features side-emitting technology, delivering a soft and uniform glow. It can be equipped with a surface-mounted frame, offering flexible installation options for both recessed and surface-mounted applications. With its ultra-thin profile, it seamlessly integrates into any interior design. Moreover, its excellent cost-performance ratio makes it an ideal choice for those seeking both quality and value.

Dimension



Recessed-mounted

Rated Power: 6W
D-H: 120*7mm
Surface Cutout: Ø105mm

Rated Power: 9W
D-H: 148*7mm
Surface Cutout: Ø128mm

Rated Power: 12W
D-H: 170*7mm
Surface Cutout: Ø150mm

Rated Power: 18W
D-H: 220*7mm
Surface Cutout: Ø200mm

Rated Power: 24W
D-H: 300*7mm
Surface Cutout: Ø280mm

Rated Power: 30W
D-H: 300*7mm
Surface Cutout: Ø280mm



Surface-mounted

Rated Power: 6W
D-H: 120*28mm

Rated Power: 9W
D-H: 148*28mm


Rated Power: 12W
D-H: 170*28mm

Rated Power: 18W
D-H: 220*28mm

Rated Power: 24W
D-H: 300*28mm

Rated Power: 30W
D-H: 300*28mm

Installation Steps



1. Cut out a hole in the ceiling according to the dimensions of the Panel Light.
2. Connect the adapter to the main line.
3. Place the adapter inside the cut-out ceiling & press the clip upwards by pushing the light panel in.
4. The clips will snap on automatically on release & will fit perfectly to the cut out hole.

Technical Details

IP20 | RoHS | CB | CE | CRI≥80

30,000 Hrs | LM80 | B10

Basic Details

Wattage
6W | 9W | 12W | 18W | 24W | 30W


Luminous efficiency
90lm/w

CCT
3000K | 4000K | 6500K



Input Voltage
220-240V, 50/60Hz

Material
Aluminium

Mounting Information



Light Distribution

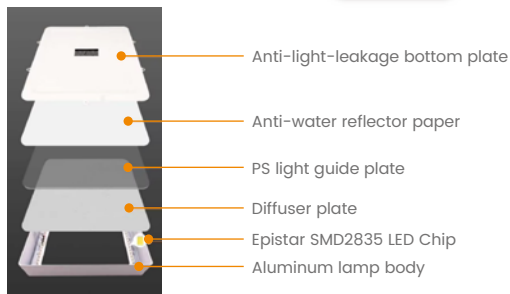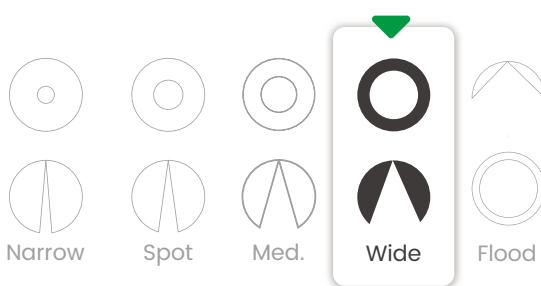

Super Slim Panel Light(Back Light)



Square


Round

Product Description

This high-performance LED slim panel light adopts a direct-lit design for bright, uniform illumination. It boasts excellent cost-effectiveness, making it perfect for both residential and commercial projects.

Made of premium PC material, it resists yellowing effectively, retaining its sleek look and light transmittance over long-term use. Originally a recessed fixture, it can be paired with a surface-mounted frame for flexible installation.

Opt for the version with dip-switch function to easily adjust power and color temperature according to your needs. A reliable, versatile lighting solution at a budget-friendly price.

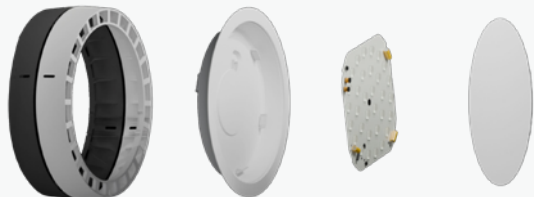

Dimension



Recessed-mounted

Rated Powe: 6W D-H: Φ120*33mm Cutout: Φ100-110mm	Rated Powe: 6W D-H: 120*120*33mm Cutout: 100-110m
Rated Powe: 12W D-H: Φ167*33mm Cutout: Φ140-160mm	Rated Powe: 12W D-H: 167*167*33mm Cutout: 140-160mm
Rated Powe: 18W D-H: Φ224*35mm Cutout: Φ195-210mm	Rated Powe: 18W D-H: 224*224*35mm Cutout: 195-210mm
Rated Powe: 24W D-H: Φ298*35mm Cutout: Φ270-285mm	Rated Powe: 24W D-H: 298*298*35mm Cutout: 270-285mm

Technical Details

IP20

RoHS

CB

CE

CRI≥80

30,000 Hrs | LM80 | B10

Basic Details

Wattage

6W | 12W | 18W | 24W

Luminous efficiency

90lm/W

CCT

3000K | 4000K | 6500K

Input Voltage

220-240V, 50/60Hz

Material

PC+PC

Mounting Information

Recessed

Suspended

Surface

Track

Self Adhesive Double Sided Tape

Light Distribution

Narrow

Spot

Med.

Wide

Flood

Optional selection

Surface-mounted Frame

Recessed Panel Light

+

Frame

=

Surface Panel Light

Circular/Square frame for lamp with DOB IC Driver.

Height 32mm

CCT and Power Adjustable

CCT : with built-in dial code switch

Dimmable: Dimmable are available 50%--75%--100% Power

CCT

3000K 4000K 6000K

50% 75% 100%

Led Big Panel Light



Product Description

LED Big Panel Lights are efficient, energy-saving illumination solutions featuring broad illumination areas and high luminous efficiency. Crafted with high-quality LEDs, they offer bright, uniform light distribution while maintaining low heat generation and long lifespan. Perfect for commercial, industrial, and residential spaces, they enhance lighting quality and reduce energy consumption.

Dimension

LED Big Panel Light Side lit

Rated Power 36W/40W/48W
A-B-C (mm) 595*595*8

Rated Power 36W/40W/48W
A-B-C (mm) 295*1195*8

Rated Power 64W/72W
A-B-C (mm) 595*1195*8


LED Big Panel Light Back lit

Rated Power 36W/40W
A-B-C (mm) 595*595*30

Rated Power 36W/40W
A-B-C (mm) 295*1195*30

Rated Power 64W/72W
A-B-C (mm) 595*1195*30

Installation method

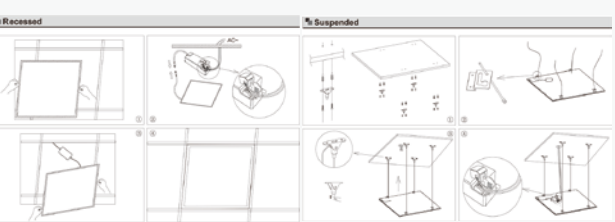

Technical Details

IP20

RoHS

CB

CE

CRI≥80

UGR<19/22

30,000 Hrs | LM80 | B10

Basic Details

Wattage

36W | 40W | 48W | 64W | 72W

Luminous efficiency

100lm/W | 120lm/W (Back lit)
80lm/W | 90lm/W | 100lm/W (Side lit)

CCT

3000K | 4000K | 5000K | 6500K

Input Voltage

100-265V | 220-240V , 50/60Hz

Material

(Back lit) Aluminum frame + iron base + diffuser (PS)
(Side lit) Aluminum frame + iron base + cushion pad + light guide plate (PMMA/PS) + reflective paper + diffuser (PS)

Body Finish

White

Mounting Information

Recessed

Suspended

Surface

Track

Self Adhesive Double Sided Tape

Light Distribution

Narrow


Spot

Med.

Wide

Flood


Optional selection--0-10V or Triac Dimmble

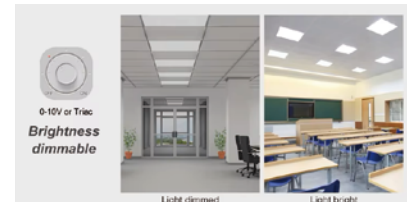

Optional selection--CCT adjustable



Slim Led Ceiling Light

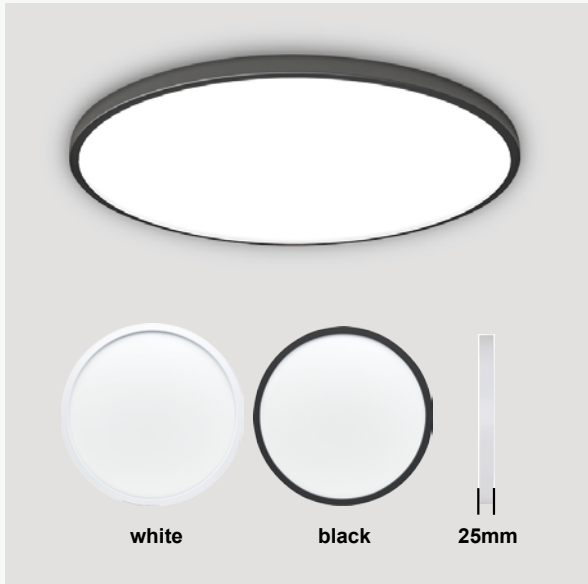


Technical Details

IP20 RoHS CB CE CRI≥80 UGR<19
30,000 Hrs | LM80 | B10


Basic Details

Wattage
22W | 26W | 34W | 42W
Luminous
1980lm | 2340lm | 3400lm | 4200lm
CCT
3000K | 4000K | 6500K
Input Voltage
220-240V, 50/60Hz
Material
Plastic
Body Finish
White | Black


Light Distribution

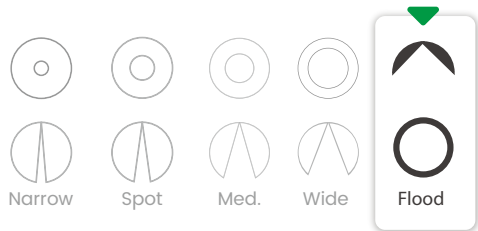

Mounting Information




Structural Diagram

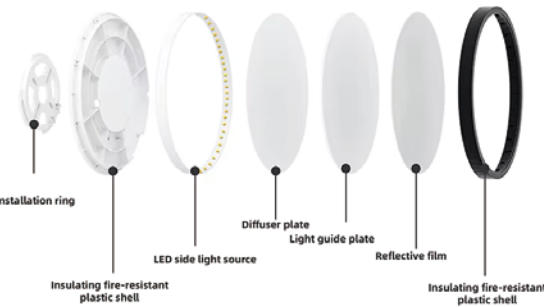


Product Description

This LED ceiling light features side illuminated technology, emitting a gentle and cozy glow. Measuring just 2cm in thickness, it's extremely thin and seamlessly integrates into any interior design. Installation is incredibly simple. Whether it's for the living room, bedroom, or study, this LED ceiling light enhances the beauty and warmth of your home.

Dimension

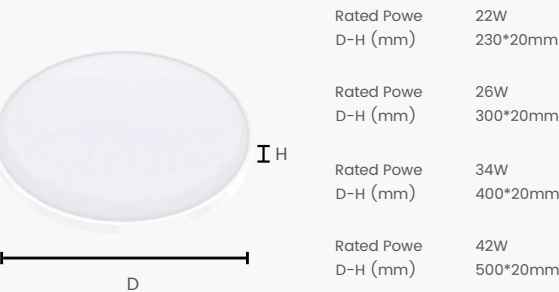

Led Triproof Ceiling Light

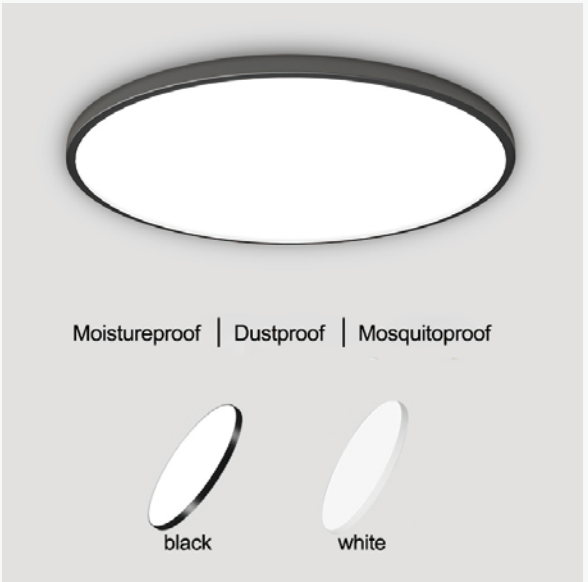


Technical Details

IP44 RoHS CB CE CRI≥85
30,000 Hrs | LM80 | B10


Basic Details

Wattage
18W | 24W | 32W | 40W
Luminous efficiency
100lm/W
CCT
2700K | 3000K | 4000K | 5000K | 6500K | 3CCT
Input Voltage
165-265V | 100-265V, 50/60Hz
Material
Plastic
Body Finish
White | Black


Light Distribution

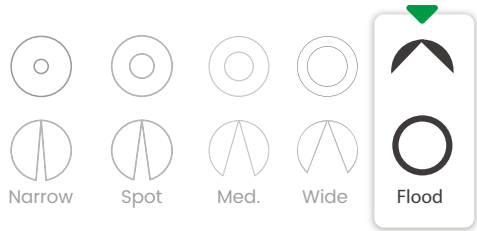

Mounting Information




Installation method

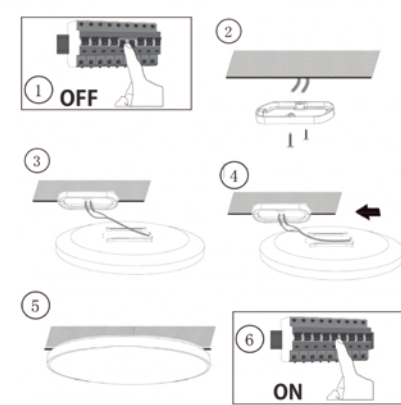

Product Description

This all plastic thin ceiling light adopts LED lens light source, emitting uniform and bright light from the bottom. Cost-effective and energy-saving, it offers excellent resistance to moisture, insects, and dust. Easy to install and disassemble, it's a practical and stylish lighting solution for any home.

Dimension

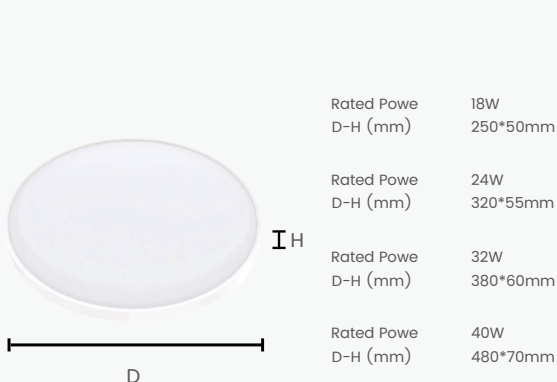


Smart Slim Ceiling Light with Back Light




Product Description

SMART SLIM CEILING LIGHT WITH BACK LIGHT - an innovative lighting masterpiece that elevates your home decor. Featuring dimming capabilities, and smart scheduling, it offers unparalleled convenience and energy efficiency. What sets it apart is its stunning backlit ambient lighting that can emit a myriad of colors, creating the perfect ambiance for any occasion or mood. From warm and cozy to cool and vibrant, the Smart Ceiling Light transforms your space into a personalized oasis.


Product Dimension

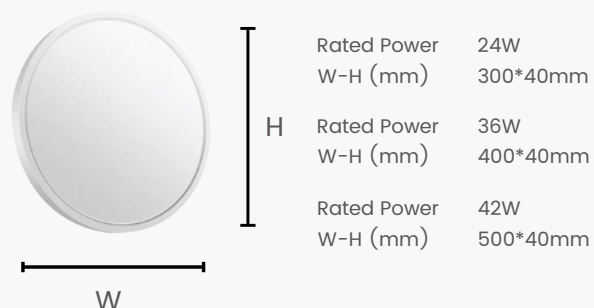



Installation method

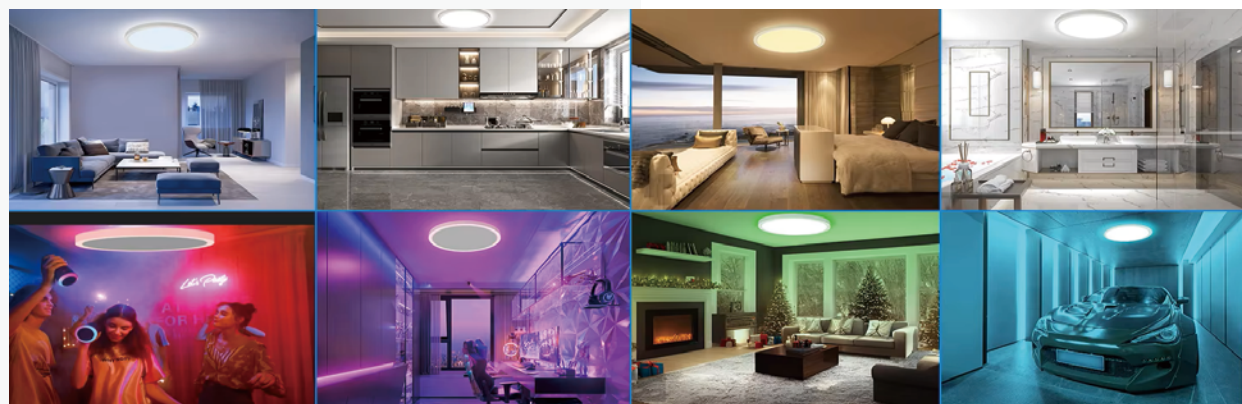


Technical Details



Basic Details

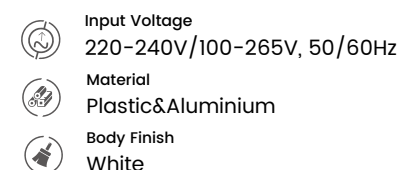

Optional selection--Remote control

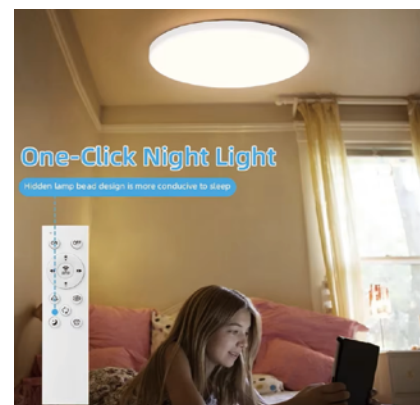

New Panel Light with Auxiliary Lighting




Product Description

This cutting-edge panel light stands out in the market with its ultra-thin design and innovative side-glowing technology, delivering softer, more elegant lighting with enhanced visual effects.

Key Features:

- ✓ 2.4G Remote Control - Easily adjust CCT (color temperature) and switch to night light mode for customized comfort.
- ✓ Upgraded "King of Karaoke" Edition (Optional) - Take entertainment to the next level with:
Built-in Bluetooth Speaker for wireless music streaming
Cool LED Mic for a fun singing experience
Dynamic Ambient Lighting to set the perfect party vibe

Dimension

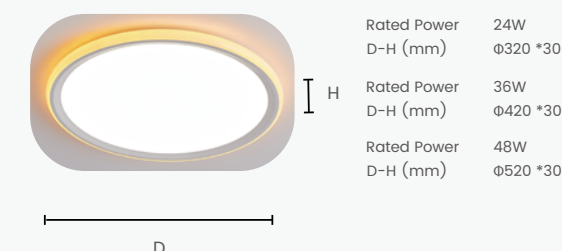




Installation method




Technical Details




Basic Details



Mounting Information



Light Distribution

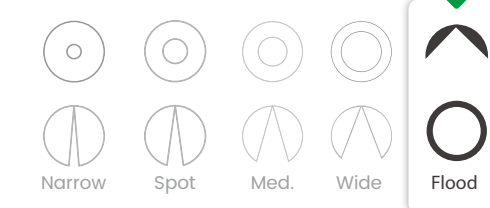

Optional selection--Upgraded Version! Become the King of Karaoke

TUYA App + Bluetooth Speaker + Microphone




Led Ceiling Light




Product Description

LED ceiling lights, designed with a unique feature that allows for effortless replacement of various stylish lampshades. Elevate your space's ambiance and personalize your lighting experience by simply swapping out the lampshade to match your decor or mood. Bright, energy-efficient, and stylish – the perfect blend for any modern home.


Dimension

	Rated Power	12W
	D-H (mm)	260*70mm
	Rated Power	18W
	D-H (mm)	330*70mm
	Rated Power	32W
	D-H (mm)	380*70mm
	Rated Power	48W
	D-H (mm)	480*70mm


INSTALLATION STEPS

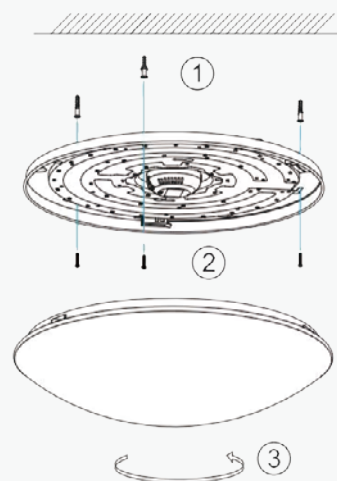

Technical Details




Basic Details

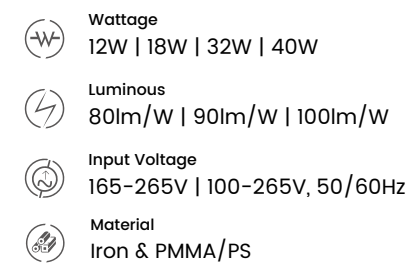


Mounting Information




Light Distribution

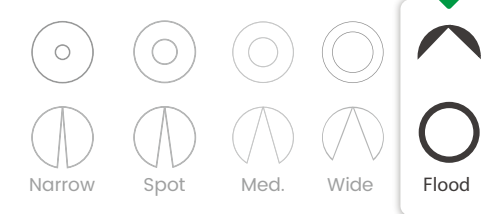

Optional selection- CCT adjustable by turning on and off



Optional selection-ADD MICROWAVE SENSOR

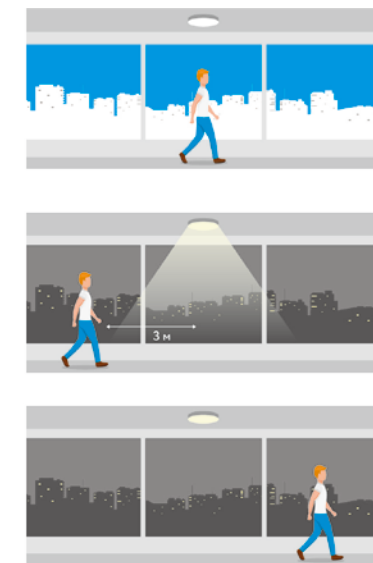

More Style Display





Product Description


LED Batten Lights are modern lighting fixtures that feature long, straight tubes filled with LED bulbs. They provide bright, even illumination and are energy-efficient, making them a popular choice for industrial, commercial, and residential spaces. LED batten lights are durable, long-lasting, and can significantly reduce energy costs compared to traditional lighting options.

Dimension


Description

	H65	Rated Power	18W	36W
		L-W-H (mm)	600*65*20	1200*65*20
	H75	Rated Power	18W	36W
		L-W-H (mm)	600*75*24	1200*75*24
	L55	Rated Power	18W	36W
		L-W-H (mm)	600*55*21	1200*55*21
	L63	Rated Power	18W/27W	36W/54W
		L-W-H (mm)	600*55*24	1200*55*24
	L75	Rated Power	28W/36W	54W/72W
		L-W-H (mm)	600*75*26	1200*75*26
	L100	Rated Power	28W/36W	54W/72W
		L-W-H (mm)	600*103*28	1200*103*28
	C60	Rated Power	25W	54W
		L-W-H (mm)	600*65*20	1200*65*20
	C70	Rated Power	36W	72W
		L-W-H (mm)	600*65*20	1200*65*20

Installation Methods

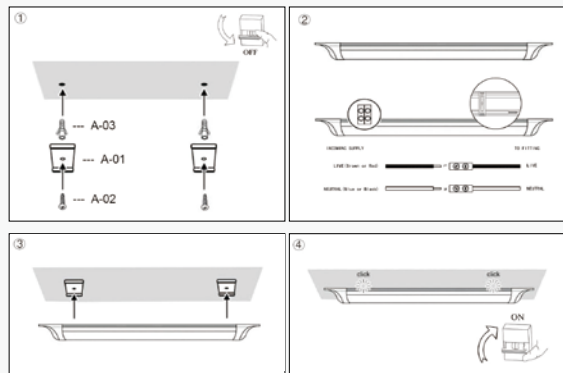


Technical Details





Basic Details



Mounting Information





Light Distribution

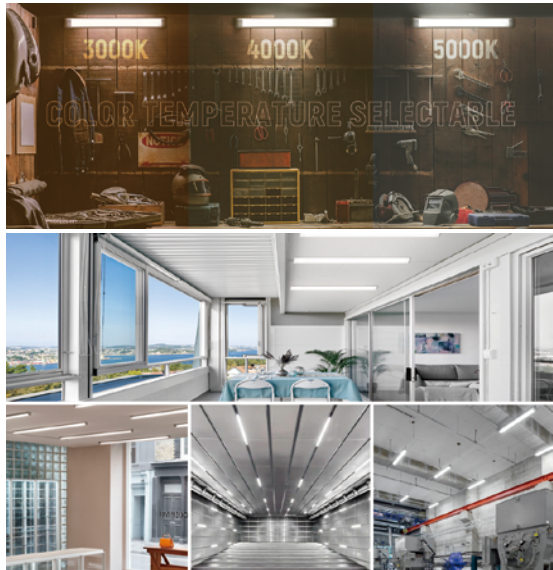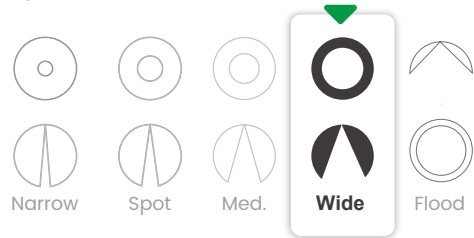

2835 LED strip offers the optimal balance of brightness, power consumption, and cost while delivering high color rendering.

It is the top mainstream choice for residential primary lighting, commercial spaces, and landscape illumination.

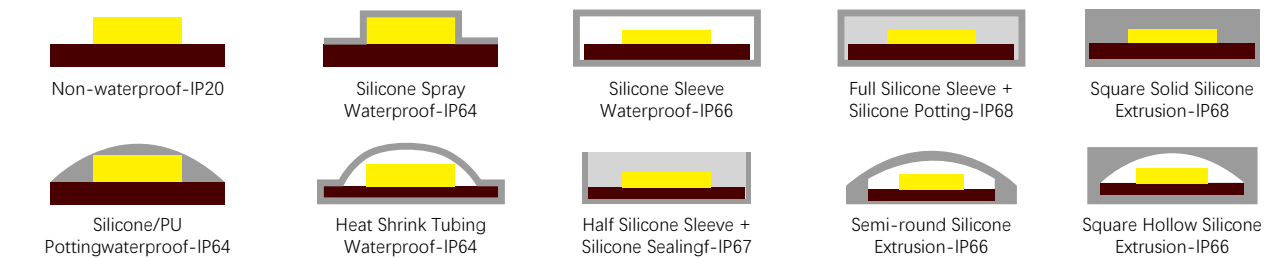


LED'S quantity	Power	Brightness	Cut size 12V	24V	Voltage	CRI	Waterproof Rating	Size
30LED/M	4.8W/M	480lm/M	100mm	167mm	DC12V/DC24V	80/90/95	IP20/64/66/68	L5000*W8mm
60LED/M	9.6w/m	960lm/M	50mm	100mm	DC12V/DC24V	80/90/95	IP20/64/66/68	L5000*W8mm
120LED/M	9.6W/M	960lm/M	25mm	50mm	DC12V/DC24V	80/90/95	IP20/64/66/68	L5000*W8mm
120LED/M	14.4W/M	1440lm/M	25mm	50mm	DC12V/DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
120LED/M	18W/M	1800lm/M	/	50mm	DC24V	80/90/95	IP20/64/66/68	L5000*W12mm
144LED/M	12W/M	1200lm/M	/	41.7mm	DC24V	80/90/95	IP20/64/66/68	L5000*W6mm
144LED/M	16W/M	1600lm/M	/	41.7mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
180LED/M	12W/M	1200lm/M	16.67mm	33.3mm	DC12V/DC24V	80/90/95	IP20/64/66/68	L5000*W8mm
180LED/M	18W/M	1800lm/M	/	33.3mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
240LED/M	19.2W/M	1920lm/M	12.5mm	25mm	DC12V/DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
240LED/M Double row	26W/M	2600lm/M	/	25mm	DC24V	80/90/95	IP20/64/66/68	L5000*W15mm
360LED/M Double row	30W/M	3000lm/M	/	16.7mm	DC24V	80/90/95	IP20/64/66/68	L5000*W20mm
480LED/M Four rows	36W/M	3600lm/M	/	50mm	DC24V	80/90/95	IP20/64/66/68	L5000*W30mm
90LED/M	6W/M	600lm/M	33.3mm		DC12V	80/90/95	IP20/66	L5000*W4mm
120LED/M	9.6W/M	960lm/M	50mm		DC24V	80/90/95	IP20/66	L5000*W4/5mm
140LED/M	9.6W/M	1114lm/M	50mm		DC24V	80/90/95	IP20/66	L5000*W5mm
160LED/M	8W/M	066lm/M	50mm		DC24V	80/90/95	IP20/66	L5000*W5mm
168LED/M	12W/M	1392lm/M	41.7mm		DC24V	80/90/95	IP20/66	L5000*W5mm



2110 LED —The world’s thinnest LED, enabling flush-mounted installation. Primarily used in ultra-thin aluminum channels, kickboards (baseboards), and embedded lighting for electronic devices.

2216 LED—Nearly as thin as the 2110, with 50% higher brightness. Ideal for cabinet lighting, display case edges, and auxiliary lighting in advertising lightboxes.

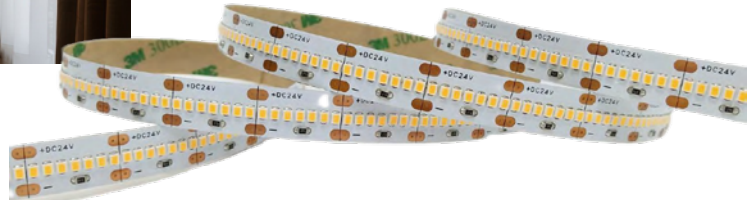


2200K 2400K 2700K
3000K 4000K 5000K 6000K




Non-waterproof-IP20




Silicone Spray
Waterproof-IP64



Silicone Sleeve
Waterproof-IP66



Full Silicone Sleeve +
Silicone Potting-IP68



Square Solid Silicone
Extrusion-IP68



Silicone/PU
Pottingwaterproof-IP64



Heat Shrink Tubing
Waterproof-IP64



Half Silicone Sleeve +
Silicone Sealingf-IP67



Semi-round Silicone
Extrusion-IP66



Square Hollow Silicone
Extrusion-IP66

2216 series

LED'S quacity	Power	Brightness	Cut size		Voltage	CRI	Waterproof Rating	Size
			12V	24V				
120LED/M	10W/M	900lm/M	25mm	50mm	DC12V/DC24V	90/95	IP20/64/66/68	L5000*W8/10mm
126LED/M	10W/M	1000lm/M	/	5.6mm	DC24V	90/95	IP20/64/66/68	L5000*W10mm
180LED/M	16W/M	1440lm/M	/	33.3mm	DC24V	90/95	IP20/64/66/68	L5000*W8/10mm
240LED/M	16W/M	1440lm/M	12.5mm	25mm	DC12V/DC24V	90/95	IP20/64/66/68	L5000*W10mm
280LED/M	18W/M	1800lm/M	/	25mm	DC24V	90/95	IP20/64/66/68	L5000*W8/10mm
288LED/M	18W/M	1620lm/M	/	20.8mm	DC24V	90/95	IP20/64/66/68	L5000*W10mm
300LED/M	19.2W/M	1728lm/M	/	20mm	DC24V	90/95	IP20/64/66/68	L5000*W10mm
360LED/M	22W/M	1980lm/M	/	16.7mm	DC24V	90/95	IP20/64/66/68	L5000*W10mm
364LED/M	18W/M	1800lm/M	/	19.2mm	DC24V	90/95	IP20/64/66/68	L5000*W8mm
420LED/M	24W/M	2400lm/M	/	16.7mm	DC24V	90/95	IP20/64/66/68	L5000*W10mm

2110 series

LED'S quacity	Power	Brightness	Cut size		Voltage	CRI	Waterproof Rating	Size
			12V	24V				
60LED/M	4.8W/M	432lm/M	50mm	100mm	DC12V/DC24V	90/95	IP20/64/66/68	L5000*W8mm
120LED/M	9.6W/M	864lm/M	25mm	50mm	DC12V/DC24V	90/95	IP20/64/66/68	L5000*W8mm
140LED/M	11W/M	1045lm/M	/	50mm	DC24V	90/95	IP20/64/66/68	L5000*W8mm
180LED/M	12W/M	1080lm/M	16.67mm	33.3mm	DC12V/DC24V	90/95	IP20/64/66/68	L5000*W8mm
210LED/M	14.4W/M	1368lm/M	/	33.3mm	DC24V	90/95	IP20/64/66/68	L5000*W10mm
238LED/M	16W/M	1520lm/M	/	29.4mm	DC24V	90/95	IP20/64/66/68	L5000*W10mm
240LED/M	14.4W/M	1296lm/M	12.5mm	25mm	DC12V/DC24V	90/95	IP20/64/66/68	L5000*W8mm
300LED/M	16W/M	1440lm/M	10mm	20mm	DC12V/DC24V	90/95	IP20/64/66/68	L5000*W8/10mm
360LED/M	17W/M	1530lm/M	/	16.7mm	DC24V	90/95	IP20/64/66/68	L5000*W8mm
700LED/M	18W/M	1710lm/M	/	10mm	DC24V	90/95	IP20/64/66/68	L5000*W8mm
1120LED/M	28.8W/M	2736lm/M	/	12.5mm	DC24V	90/95	IP20/64	L5000*W12mm
180LED/M	10W/M	900lm/M	33.3mm		DC24V	90/95	IP20/66	L5000*W5mm
240LED/M	11W/M	990lm/M	25mm		DC24V	90/95	IP20/66	L5000*W5mm
280LED/M	12W/M	1140lm/M	25mm		DC24V	90/95	IP20/66	L5000*W5mm
300LED/M	12W/M	1080lm/M	20mm		DC24V	90/95	IP20/66	L5000*W5mm







SMD 3014&4020 12v/24v Led Strip--Side Light



3014&4020—Side-light, controllable light direction, ultra-thin.

Application scenarios: TV backlighting, display bezels, edge-lit advertising letters lightboxes.

2200K 2400K 2700K
3000K 4000K 5000K 6000K



LED type	LED'S quacity	Power	Brightness	Cut size		Voltage	CRI	Waterproof Rating	Size
				12V	24V				
3014	60LED/M	6W/M	570lm/M	50mm	100mm	DC12V/DC24V	80/90	IP20/66	L5000*W6mm
3014	120LED/M	12W/M	1140lm/M	25mm	50mm	DC12V/DC24V	80/90	IP20/66	L5000*W8mm
3014	156LED/M	14.4W/M	1368lm/M	/	38.5mm	DC24V	80/90	IP20/66	L5000*W8mm
4020	60LED/M	6W/M	570lm/M	50mm	100mm	DC12V/DC24V	80/90	IP20/66	L5000*W8mm
4020	120LED/M	12W/M	1140lm/M	25mm	50mm	DC12V/DC24V	80/90	IP20/66	L5000*W8mm





SMD 5730 12v/24v Led Strip



5730—Highest single-unit brightness, suitable for high-power-density lighting.

Application scenarios: factory lighting, garages, outdoor high-intensity floodlights.

2200K 2400K 2700K
3000K 4000K 5000K 6000K



LED type	LED'S quacity	Power	Brightness	Cut size		Voltage	CRI	Waterproof Rating	Size
				12V	24V				
5730	30LED/M	7.5W/M	788lm/M	100mm	167mm	DC12V/DC24V	80/90	IP20/64/66/68	L5000*W10mm
5730	60LED/M	15W/M	1575lm/M	50mm	100mm	DC12V/DC24V	80/90	IP20/64/66/68	L5000*W10mm
5730	120LED/M	24W/M	2520lm/M	/	50mm	DC24V	80/90	IP20/64	L5000*W20mm




This CCT (Correlated Color Temperature) light strip features two types of LED configurations:
Dual LED Design — Uses separate warm white and cool white LEDs to mix and achieve adjustable color temperatures.
2in1 LED — Integrates both color temperatures in a single LED chip for smoother blending and compact performance.

Both options allow flexible tuning from warm (2700K) to cool white (6500K), ideal for dynamic lighting effects.

2200K 2400K 2700K
3000K 4000K 5000K 6000K




Non-waterproof-IP20




Silicone Spray
Waterproof-IP64



Silicone Sleeve
Waterproof-IP66



Full Silicone Sleeve +
Silicone Potting-IP68



Square Solid Silicone
Extrusion-IP68



Silicone/PU
Pottingwaterproof-IP64



Heat Shrink Tubing
Waterproof-IP64



Half Silicone Sleeve +
Silicone Sealingf-IP67



Semi-round Silicone
Extrusion-IP66



Square Hollow Silicone
Extrusion-IP66

● Dual LED Design series

LED type	LED'S quantity	Power	Brightness	Cut size	Voltage	CRI	Waterproof Rating	Size
2835	60LED/M	9.6W/M	960lm/M	100mm	DC12V	80/90/95	IP20/64/66/68	L5000*W8mm
2835	120LED/M	18W/M	1800lm/M	100mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
2835	140LED/M	18W/M	2088lm/M	100mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
2835	192LED/M	20W/M	2660lm/M	41.7mm	DC24V	80/90/95	IP20/64/66/68	L5000*W10mm
2835	240LED/M	22W/M	2200lm/M	50mm	DC24V	80/90/95	IP20/64/66/68	L5000*W12mm
2835	240LED/M	26W/M	2600lm/M	100mm	DC24V	80/90/95	IP20/64	L5000*W15mm
2835	280LED/M	28W/M	3248lm/M	100mm	DC24V	80/90/95	IP20/64	L5000*W20mm
2835	336LED/M	24W/M	2400lm/M	35.7mm	DC24V	80/90/95	IP20/64	L5000*W12mm
2216	144LED/M	10W/M	900lm/M	3.3mm	DC24V	90/95	IP20/66/68	L5000*W8mm
2216	156LED/M	12W/M	1080lm/M	76.9mm	DC24V	90/95	IP20/66/68	L5000*W8mm
2216	196LED/M	16W/M	1520lm/M	71.4mm	DC24V	90/95	IP20/66/68	L5000*W10mm
2216	240LED/M	18W/M	1620lm/M	50mm	DC24V	90/95	IP20/66/68	L5000*W10mm
2216	280LED/M	18W/M	1710lm/M	50mm	DC24V	90/95	IP20/66/68	L5000*W10mm
2216	360LED/M	18W/M	1620lm/M	33.3mm	DC24V	90/95	IP20/66/68	L5000*W8mm
2110	476LED/M	24W/M	2280lm/M	29.4mm	DC24V	90/95	IP20/66/68	L5000*W10mm
2110	616LED/M	26W/M	2470lm/M	22.7mm	DC24V	90/95	IP20/66/68	L5000*W10mm




● 2in1 Design series

LED type	LED'S quantity	Power	Brightness	Cut size	Voltage	CRI	Waterproof Rating	Size
2835 2in1	60LED/M	12W/M	1200lm/M	100mm	DC24V	80/90	IP20/66/68	L5000*W8mm
5050 2in1	60LED/M	14.4W/M	1368lm/M	100mm	DC24V	80/90	IP20/66/68	L5000*W10mm
3527 2in1	120LED/M	14.4W/M	1296lm/M	50mm	DC24V	80/90	IP20/66/68	L5000*W10mm
3838 2in1	120LED/M	14.4W/M	1440lm/M	50mm	DC24V	80/90	IP20/66/68	L5000*W8mm



● Dim to Warm Design series

LED type	LED'S quantity	Power	Brightness	Cut size	Voltage	CRI	Waterproof Rating	Size
2216	224LED/M	16W/M	1520lm/M	62.5mm	DC24V	90/95	IP20/66/68	L5000*W10mm
2835	120LED/M	18W/M	1692lm/M	100mm	DC24V	90/95	IP20/66/68	L5000*W10mm

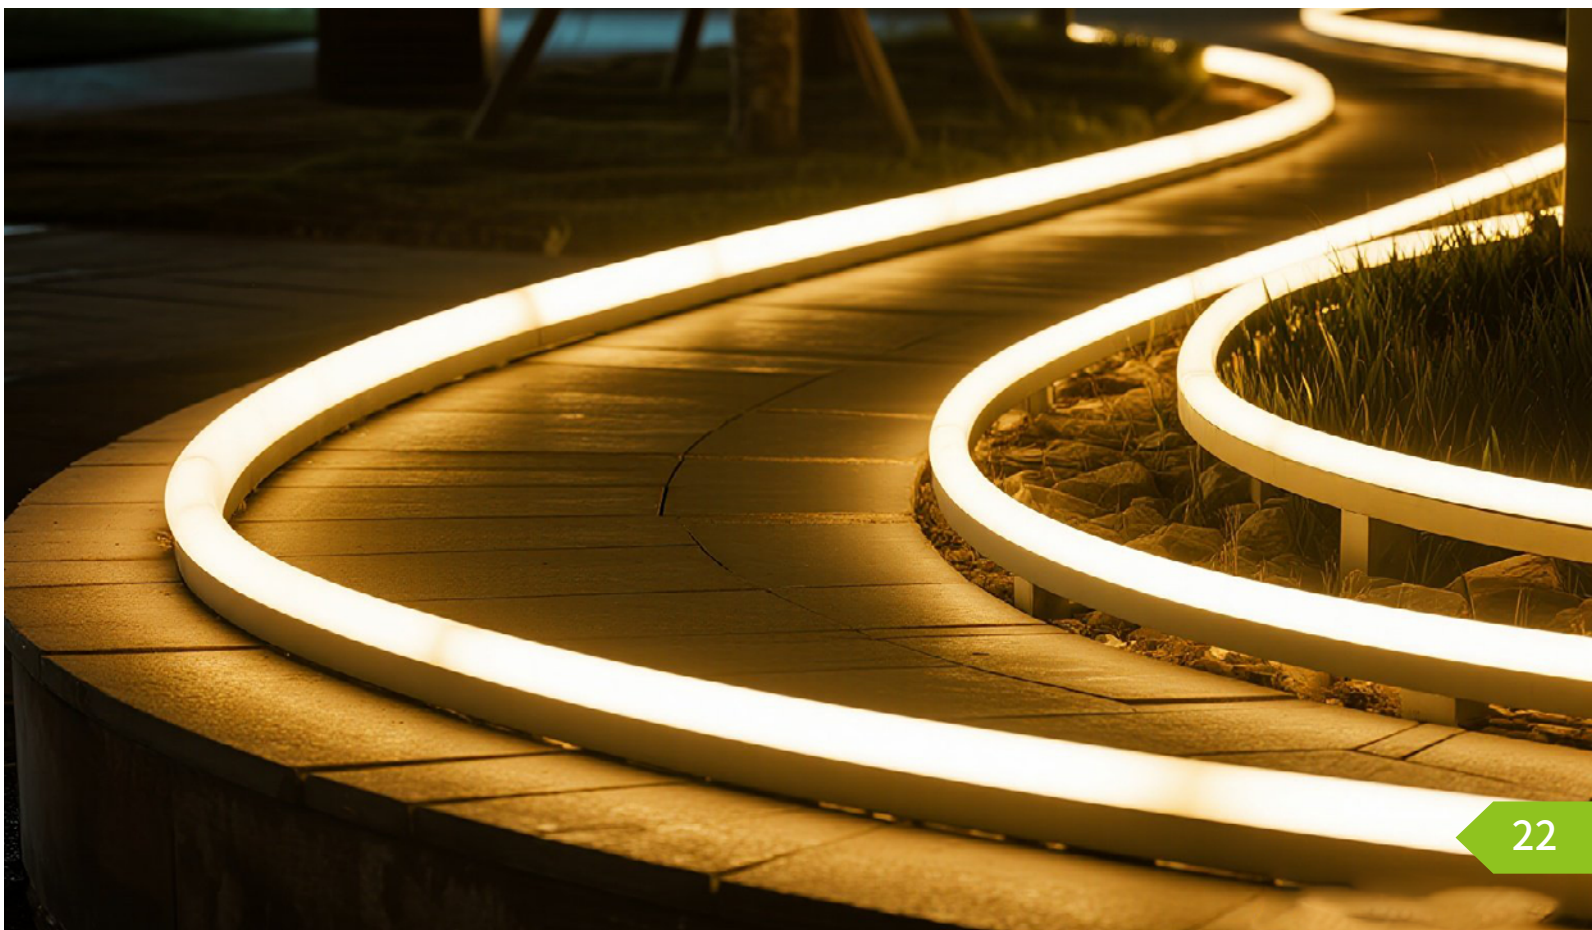

SMD RGB CCT Light Strip




2200K 2400K 2700K
3000K 4000K 5000K 6000K

4. 5050 RGB + CCT LED Strip

Features: RGB + Tunable White (CCT) – Combines RGB colors with adjustable warm-to-cool white(2700K – 6500K).

Use Case: Versatile lighting for mood settings and functional white light (e.g., homes, hotels).

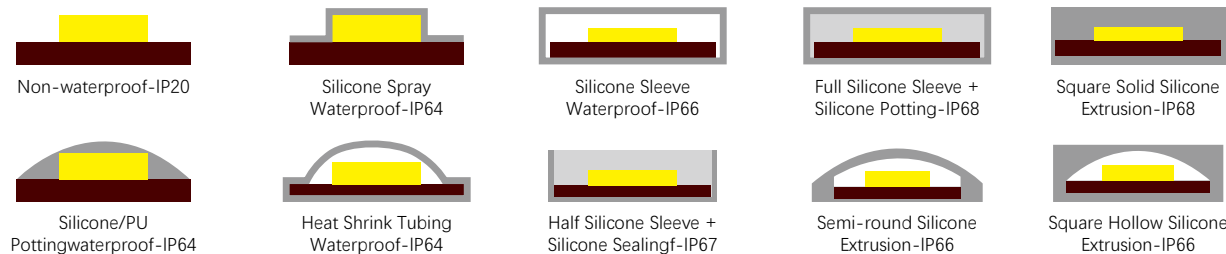

3838 Design series

LED type	LED'S quaity	Power	Brightness	Cut size	Voltage	Color	Size
3838 RGB	60LED/M	9.6W/M	336lm/M	100mm	DC12V	RG	L5000*W8mm
3838 RGB	96LED/M	12W/M	420lm/M	62.5mm	DC24V	RGB	L5000*W8mm
3838 RGB	120LED/M	14.4W/M	504lm/M	50mm	DC12V	RGB	L5000*W5mm
3838 RGB	120LED/M	16W/M	560lm/M	50mm	DC24V	RGB	L5000*W10mm
3838 RGB	240LED/M	18W/M	630lm/M	25mm	DC24V	RGB	L5000*W12mm
3838 RGB+TW	72LED/M	15W/M	675lm/M	166.7mm	DC24V	RGB+CCT	L5000*W10mm
3838RGB+2835 W	96LED/M	14.4W/M	648lm/M	125mm	DC24V	RGBW	L5000*W8mm
3838RGB+2835 W	240LED/M	20W/M	900lm/M	50mm	DC24V	RGBW	L5000*W12mm
3838RGB+2835 W+2835 WW	288LED/M	22W/M	1570lm/M	83.3mm	DC24V	RGB+CCT	L5000*W12mm

1. 3838 RGB LED Strip

The 3838 RGB strip uses 3.8mm LEDs for space-saving RGB lighting, perfect for subtle accents in tight areas, though less bright than 5050.

2. 5050 RGB LED Strip

Features: Standard RGB colors with stronger brightness and better color blending.
Use Case: Home accent lighting, signage, and entertainment setups.

3. 5050 RGBW LED Strip

Features: RGB + White (W) – Adds a dedicated white LED for purer whites and better color mixing.
Use Case: When both vibrant colors and clean white light are needed (e.g., retail displays).



SMD RGB CCT Light Strip



5050RGB Design series

LED type	LED'S quaity	Power	Brightness	Cut size	Voltage	Color	Size
5050 RGB	30LED/M	7.2W/M	252lm/M	100mm	DC12V	RGB	L5000*W10mm
5050 RGB	60LED/M	14.4W/M	504lm/M	100mm	DC24V	RGB	L5000*W10mm
5050 RGB	72LED/M	17.28W/M	605lm/M	83.3mm	DC24V	RGB	L5000*W10mm
5050 RGB	96LED/M	23.04W/M	806lm/M	62.5mm	DC24V	RGB	L5000*W10mm
5050 RGB	120LED/M	28.8W/M	1008lm/M	50mm	DC24V	RGB	L5000*W20mm



5050 RGBW Design series

LED type	LED'S quaity	Power	Brightness	Cut size	Voltage	Color	Size
5050 4in1	30LED/M	8W/M	360lm/M	166.7mm	DC24V	RGBW	L5000*W12mm
5050 4in1	48LED/M	13W/M	585lm/M	125mm	DC24V	RGBW	L5000*W12mm
5050 4in1	60LED/M	16W/M	720lm/M	100mm	DC24V	RGBW	L5000*W12mm
5050 4in1	72LED/M	20W/M	900lm/M	83.3mm	DC24V	RGBW	L5000*W12mm
5050 4in1	96LED/M	23W/M	1035lm/M	62.5mm	DC24V	RGBW	L5000*W12mm
5050 4in1	120LED/M	28W/M	1260lm/M	50mm	DC24V	RGBW	L5000*W20mm
5050 4in1	144LED/M	30W/M	1350lm/M	41.7mm	DC24V	RGBW	L5000*W20mm
5050 RGB+W	60LED/M	12W/M	540lm/M	166.7mm	DC24V	RGBW	L5000*W10mm
5050 RGB+W	120LED/M	24W/M	1080lm/M	100mm	DC24V	RGBW	L5000*W15mm



5050 RGB+CCT Design series

LED type	LED'S quaity	Power	Brightness	Cut size	Voltage	Color	Size
5050 5in1	30LED/M	12W/M	660lm/M	100mm	DC12V		8L5000*W12mm
5050 5in1	60LED/M	18W/M	990lm/M	100mm	DC24V	RGB CCT	L5000*W12mm
5050 5in1	96LED/M	23W/M	1265lm/M	62.5mm	DC24V	RGB CCT	L5000*W12mm
5050 RGB+2in1	72LED/M	22W/M	1210lm/M	166.7mm	DC24V	RGB CCT	L5000*W16mm



2200K 2400K 2700K
3000K 4000K 5000K 6000K

1. Classic COB Light Strip

Uniform & Bright: Seamless, high-density light output with no visible dots.

Reliable: Stable performance for general lighting (e.g., home, retail).

Standard Use: Fixed-length or pre-cut segments; less flexible for customization.

2. Freely-Cutttable COB Strip

Cut Anywhere: Trim at any point (e.g., every 1cm) without damaging circuits.

DIY-Friendly: Perfect for custom projects and irregular spaces.


Flexible: Maintains brightness even after cutting.

3. Side-Emitting COB Strip

Edge Illumination: Light emits from the side, ideal for hidden profiles or edge lighting.

Space-Saving: Slim design for tight spaces (e.g., cabinets, stairs).

Sleek Look: Creates indirect, glare-free lighting effects.

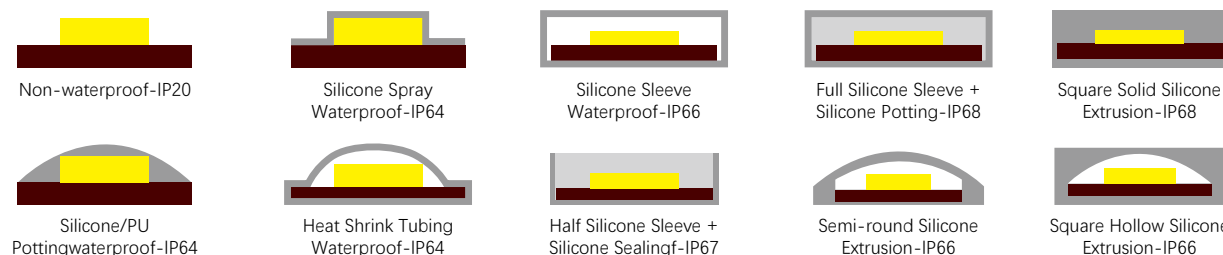

Classic COB series

LED'S quntity	Power	Brightness	Cut size		Voltage	CRI	Waterproof Rating	Size
			12V	24V				
384LED/M	8W/M	800lm/M	/	83.3mm	DC24V	90	IP20/66/68	L5000*W8mm
480LED/M	5W/M	500lm/M	25mm	50mm	DC12V/DC24V	90	IP20	L5000*W3mm
480LED/M	6W/M	600lm/M	25mm	50mm	DC12V/DC24V	90	IP20	L5000*W4mm
480LED/M	7W/M	700lm/M	25mm	50mm	DC12V/DC24V	90	IP20/66/68	L5000*W5mm
480LED/M	9W/M	900lm/M	25mm	50mm	DC12V/DC24V	90	IP20/66/68	L5000*W8mm
480LED/M	12W/M	1200lm/M	25mm	50mm	DC12V/DC24V	90	IP20/66/68	L5000*W10mm
512LED/M	14W/M	1400lm/M	/	62.5mm	DC24V	90	IP20/66/68	L5000*W10mm
528LED/M	14W/M	1400lm/M	/	45.5mm	DC24V	90	IP20/66/68	L5000*W10mm




Cut-free COB strip series

LED'S quntity	Power	Brightness	Cut size		Voltage	CRI	Waterproof Rating	Size
			12V	24V				
300LED/M	8W/M	720lm/M	10mm	/	DC12V	90	IP20/66/68	L5000*W8mm
400LED/M	7W/M	630lm/M	10mm	/	DC12V	90	IP20/66/68	L5000*W5mm
480LED/M	6W/M	540lm/M	/	8.3mm	DC24V	90	IP20/66/68	L5000*W5mm
480LED/M	9W/M	810lm/M	8.3mm	12.5mm	DC12V/DC24V	90	IP20/66/68	L5000*W8mm
512LED/M	9W/M	900lm/M	7.8mm	15.6mm	DC12V/DC24V	90	IP20/66/68	L5000*W8mm
512LED/M	14W/M	1400lm/M	/	15.6mm	DC24V	90	IP20/66/68	L5000*W10mm
600LED/M	10W/M	1000lm/M	/	5mm	DC12V	90	IP20/66/68	L5000*W8mm



Side-light COB strip series

LED'S quntity	Power	Brightness	Cut size		Voltage	CRI	Waterproof Rating	Size
			12V	24V				
378LED/M	10W/M	850lm/M	/	55.6mm	DC24V	90	IP20/66	L5000*W10mm
560LED/M	12W/M	1020lm/M	/	50mm	DC24V	90	IP20/66	L5000*W10mm
840LED/M	12W/M	360lm/M	/	50mm	DC24V	RGB	IP20/66	L5000*W10mm

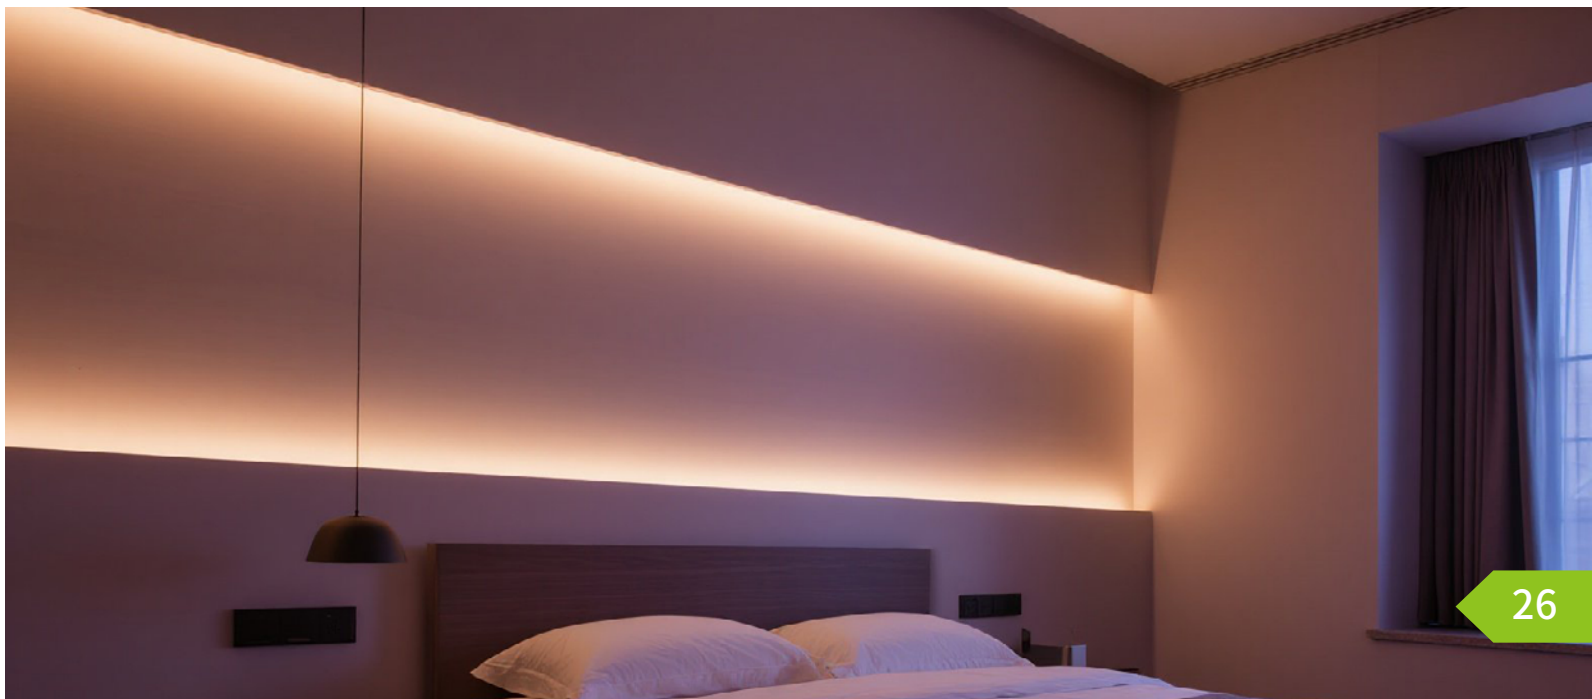

COB RGB&CCT Light Strip



2200K 2400K 2700K
3000K 4000K 5000K 6000K

1. CCT (Tunable White) COB Light Strip


Adjustable White Light: Seamlessly switch between warm white (2700K) to cool white (6500K).
Uniform Glow: High-density COB LEDs provide no visible dots, ideal for ambient lighting.
Smart Control: Compatible with dimmers/apps for brightness and color temperature tuning.

2. RGB COB Light Strip

Full-Color Mixing: Combine Red, Green, Blue to create vibrant colors (16 million shades).
Smooth Gradient: COB technology eliminates spotting for even color transitions.
Versatile Use: Perfect for accent lighting, gaming setups, or mood lighting.

3. Magic Color (RGBIC) COB Light Strip

Dynamic Effects: Rainbow flow, chasing, or segmented color control (with addressable LEDs).
Advanced Control: Sync with music/apps for immersive lighting.
High-End Aesthetics: Combines COB's smoothness with advanced programmable features.

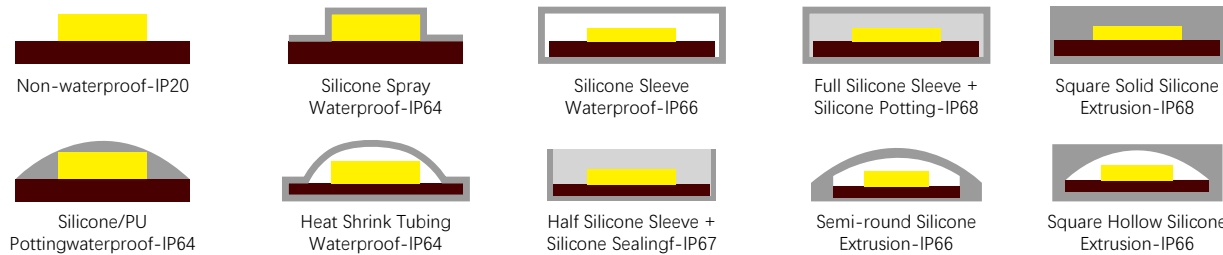

● CCT COB Design series

LED type	LED'S quantity	Power	Brightness	Cut size		Voltage	CRI	Waterproof Rating	Size
				12V	24V				
COB	512LED/M	16W/M	1600lm/M	/	31.3mm	DC24V	90	IP20/66/68	L5000*W8mm
COB	608LED/M	22W/M	2200lm/M	13.2mm	26.3mm	DC24V	90	IP20/66/68	L5000*W10mm
COB	640LED/M	22W/M	2200lm/M	/	50mm	DC24V	90	IP20/66/68	L5000*W10mm

SMD RGB&CCT Light Strip



● RGB COB Design series

LED type	LED'S quantity	Power	Brightness	Cut size		Voltage	CRI	Waterproof Rating	Size
				12V	24V				
RGB	450LED/M	15W/M	450lm/M	20mm	/	DC12V	/	IP20/66/68	L5000*W10mm
RGB	480LED/M	15W/M	450lm/M	/	50mm	DC24V	/	IP20/66/68	L5000*W10mm
RGB	810LED/M	15W/M	450lm/M	11.11mm	/	DC12V	/	IP20/66/68	L5000*W10mm
RGB	840LED/M	15W/M	450lm/M	/	25mm	DC24V	/	IP20/66/68	L5000*W10mm
RGBW	896LED/M	20W/M	800lm/M	/	31.3mm	DC24V	90	IP20/66/68	L5000*W12mm
RGB CCT	840LED/M	25W/M	1250lm/M	/	41.7mm	DC24V	90	IP20/66/68	L5000*W12mm



● Magic Color RGB COB Design series

LED type	LED'S quantity	Power	Brightness	Cut size		Voltage	CRI	Waterproof Rating	Size
				12V	24V				
White	360LED/M	12W/M	1200lm/M	83.3mm	WS2811	DC24V	90	IP20/66/68	L5000*W10mm
CCT	576LED/M	14W/M	1400lm/M	83.3mm	WS2811	DC24V	90	IP20/66/68	L5000*W10mm
RGB	420LED/M	13.5W/M	473lm/M	100mm	WS2811	DC24V	90	IP20/66/68	L5000*W10mm
RGB	720LED/M	21W/M	735lm/M	100mm	WS2811	DC24V	90	IP20/66/68	L5000*W12mm
RGBW	840LED/M	16W/M	720lm/M	100mm	WS2814	DC24V	90	IP20/66/68	L5000*W12mm



High Voltage Led Light Strip



Product Description

High-Voltage LED Strip Lights

- ✓ Works directly with mains power (110V/220V)
- ✓ No voltage drop even over 30-meter runs
- ✓ IP65 waterproof rating (dustproof and protected against water jets)

Ideal for long, bright, and energy-efficient lighting installations

Dimension



Rated Powe: 6.5w(120 LEDS)
W-H : 6*11mm



Rated Powe: 9w(180 LEDS)
W-H: 7.3*14.3mm

Installation Steps



Technical Details


IP65 RoHS CB CE CRI≥80

30,000 Hrs | LM80 | B10


Basic Details

-  Wattage
6.5W | 9W
-  Luminous efficiency
90lm/W
-  CCT
3000K | 4000K | 6500K
-  Input Voltage
220-240V, 50/60Hz
-  Material
Copper+PVC

Light Distribution

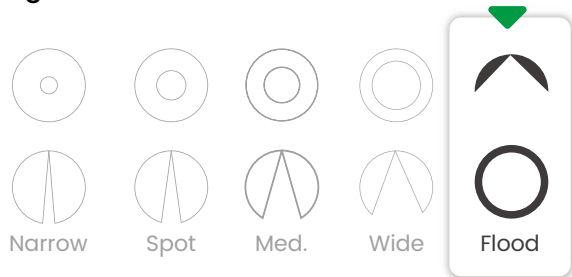

Note:Can be cut Every 1Meter cuttable

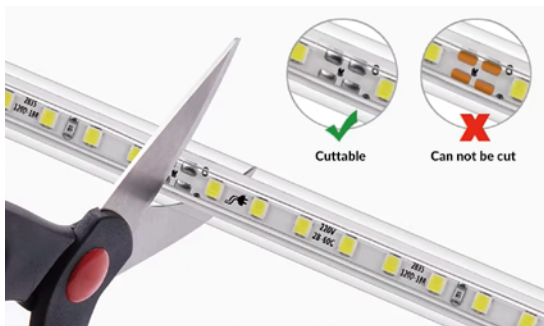

2835-Warm White



2835-White

LED DECORATIVE LIGHTING

Aladdin founded in1995

Alien Filament Lamp



T120 Twist Filament

Size
φ120*H195mm

Color
Amber | Smoky

Wattage
4W | 8W

Lumen
108-540LM

Socket
E26 | E27



T120 Straight Filament

Size
φ120*H195mm

Color
Amber | Smoky

Wattage
4W | 6W | 8W

Lumen
108-540LM

Socket
E26 | E27



PG130 Straight Filament

Size
φ130*H190mm

Color
Amber | Smoky

Wattage
4W | 6W | 8W

Lumen
108-540LM

Socket
E26 | E27



NRQ120 Twist Filament

Size
φ120*H175mm

Color
Amber | Smoky

Wattage
4W | 8W

Lumen
108-540LM

Socket
E26 | E27



R140 Straight Filament

Size
φ140*H220mm

Color
Amber | Smoky

Wattage
4W | 6W | 8W

Lumen
108-540LM

Socket
E26 | E27



KLT200 Twist Filament

Size
φ200*H275mm

Color
Amber | Smoky

Wattage
4W | 8W

Lumen
108-540LM

Socket
E26 | E27



Stone145 Twist Filament

Size
φ145*H245mm

Color
Amber | Smoky

Wattage
4W | 8W

Lumen
108-540LM

Socket
E26 | E27



Stone145 Straight Filament

Size
φ145*H245mm

Color
Amber | Smoky

Wattage
4W | 6W | 8W

Lumen
108-540LM

Socket
E26 | E27



YL180 Twist Filament

Size
φ180*H420mm

Color
Amber | Smoky

Wattage
4W | 8W

Lumen
108-540LM

Socket
E26 | E27



YL180 Straight Filament

Size
φ180*H420mm

Color
Amber | Smoky

Wattage
4W | 6W | 8W | 12W

Lumen
108-760LM

Socket
E26 | E27



Twist Filament

Size
φ120*H270mm
φ180*H400mm

Color
Amber | Smoky

Wattage
4W | 8W

Lumen
290LM | 540LM

Socket
E26 | E27



Straight Filament

Size
φ120*H270mm
φ180*H400mm

Color
Amber | Smoky

Wattage
4W | 6W | 8W | 12W

Lumen
108-760LM

Socket
E26 | E27

Alien Filament Lamp



Twist Filament

Size
φ120*H250mm
φ180*H380mm

Color
Amber | Smoky

Wattage
4W | 8W

Lumen
108-540LM

Socket
E26 | E27



Straight Filament

Size
φ120*H250mm
φ180*H380mm

Color
Amber | Smoky

Wattage
4W | 6W | 8W | 12W

Lumen
108-760LM

Socket
E26 | E27



DHP190 Twist Filament

Size
φ190*H400mm

Color
Amber | Smoky

Wattage
4W | 8W

Lumen
108-540LM

Socket
E26 | E27



DHP190 Straight Filament

Size
φ190*H400mm

Color
Amber | Smoky

Wattage
4W | 6W | 8W | 12W

Lumen
108-760LM

Socket
E26 | E27



C125 Twist Filament

Size
φ125*H450mm

Color
Amber

Wattage
4W | 8W

Lumen
290LM | 540LM

Socket
E26 | E27



C125 Straight Filament

Size
φ125*H450mm

Color
Amber

Wattage
4W | 6W | 8W

Lumen
290LM | 400LM | 540LM

Socket
E26 | E27



Twist Filament

Size
φ95*H345mm
φ120*H465mm

Color
Amber | Smoky

Wattage
4W | 8W

Lumen
108-540LM

Socket
E26 | E27



Straight Filament

Size
φ95*H345mm
φ120*H465mm

Color
Amber | Smoky

Wattage
4W | 6W | 8W | 12W

Lumen
108-800LM

Socket
E26 | E27



HG120 Twist Filament

Size
φ120*H140mm

Color
Amber

Wattage
4W | 8W

Lumen
290LM | 540LM

Socket
E26 | E27



HG120 Straight Filament

Size
φ120*H140mm

Color
Smoky

Wattage
4W | 8W

Lumen
100LM | 190LM

Socket
E26 | E27



PTC205 Straight Filament

Size
φ205*H420mm

Color
Amber

Wattage
4W | 6W | 8W

Lumen
290LM | 400LM | 540LM

Socket
E26 | E27



PTC205 Twist Filament

Size
φ205*H420mm

Color
Clear + Colorful

Wattage
4W | 8W

Lumen
340LM | 640LM

Socket
E26 | E27

Pendent Lamp



Aluminous Chandeliers A
ALD-AC-A18

- Size
φ180mm
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



Aluminous Chandeliers B
ALD-AC-B36

- Size
φ360mm
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



Aluminous Chandeliers C
ALD-AC-C20

- Size
φ200mm
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



IRON & WOODEN Chandeliers
ALD-IWC-A36

- Size
φ360mm
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



IRON 6Plugs Chandeliers
ALD-IC6-A78

- Size
L780*W220*H250mm
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



IRON 3 SETS Chandeliers
ALD-IC3-B30

- Size
φ300mm
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



ALUMINOUS Chandeliers

- Size
φ330mm
φ140*H310mm
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



ALUMINOUS Chandeliers

- Size
φ330mm
φ140*H310mm
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



IRON Chandeliers With Hemp Rope
ALD-ICHR-A80

- Size
φ800mm
- Wattage
Max 60W
- Wire
Wire with hemp rope
- Socket
E26 | E27



IRON Chandeliers With Hemp Rope
ALD-ICHR-B105

- Size
L1050mm
 - Wattage
Max 60W
 - Wire
PC Wire +Hemp Rope Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



IRON Chandeliers With Hemp Rope
ALD-ICHR-C80

- Size
φ800mm
- Wattage
Max 60W
- Wire
PC Wire
- Socket
E26 | E27



IRON Chandeliers With Hemp Rope
ALD-ICHR-D75

- Size
φ750mm
 - Wattage
Max 60W
 - Wire
PC Wire +Hemp Rope Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



Metal 3 SETS Chandelier
ALD-MC3-A18

- Size
φ180*H160mm | SET
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



Metal 3 SETS Chandelier
ALD-MC3-B15

- Size
φ150*H200mm | SET
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



IRON 3 SETS Chandeliers A
ALD-IC3-C30

- Size
φ300*H210mm | SET
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



IRON 3 SETS Chandeliers B
ALD-IC3-D30

- Size
φ300*H270mm | SET
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



IRON Chandeliers With Hemp Rope
ALD-ICHR-E140

- Size
L1400mm
- Wattage
Max 60W
- Wire
PC Wire
- Socket
E26 | E27



IRON Chandeliers With Hemp Rope
ALD-ICHR-F90

- Size
L900mm
- Wattage
Max 60W
- Wire
PC Wire +Hemp Rope Wire
- Socket
E26 | E27



IRON Chandeliers With Hemp Rope
ALD-ICHR-G80

- Size
φ800mm
- Wattage
Max 60W
- Wire
PC Wire with hemp rope
- Socket
E26 | E27



IRON Wall Lamp With Hemp Rope
ALD-ICHR-H15

- Size
L150*H200mm
- Wattage
Max 60W
- Wire
PC Wire with hemp rope
- Socket
E26 | E27



IRON Square Chandeliers
ALD-ISC-A21

- Size
L210*W210*H180mm
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



IRON Oval Chandeliers
ALD-IOC-A16

- Size
L160*W160*H180mm
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



IRON Arc-shape Chandeliers
ALD-IAC-A23

- Size
L230*W230*H220mm
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)



IRON Diamond Chandeliers
ALD-IDC-A23

- Size
L230*W230*H220mm
 - Wattage
Max 60W
 - Wire
PC Wire
 - Socket
E26 | E27
- (Fixtures Hanging Adjustable)

Pendent Lamp

LED OUTDOOR LIGHTING

Aladdin founded in1995


Triproof Light T8 Series



Product Description

The T8 series of triple-protection lights are not only durable and functional, but also feature dustproof, waterproof, and shockproof capabilities. With a sleek design, they are perfect for a range of indoor and outdoor settings. What's more, installing or removing the T8 light tubes is straightforward, adding to its overall convenience.

Dimension



	T8-2*1500mm L-W-H (mm)	T8-1*1500mm L-W-H (mm)	T8-2*1200mm L-W-H (mm)	T8-1*1200mm L-W-H (mm)	T8-2*600mm L-W-H (mm)	T8-1*1200mm L-W-H (mm)	Description
TYPE B	1575*95*60	1575*65*60	1275*95*60	1275*65*60	665*95*60	665*65*60	Minimum size
TYPE C	1566*112*83	1566*69*83	1265*112*83	1265*69*83	661*112*83	661*69*83	Maximum size
TYPE H	1570*113*60	1570*68*60	1270*113*60	1270*68*60	675*113*60	675*68*60	Flat size (widest and shortest)
TYPE J	1562*103*71	1562*71*71	1262*103*71	1262*71*71	662*103*71	662*71*71	Moderate size


Technical Details




Basic Details

- Wattage
From T8
- Material
Body: PC/ABS/HIPS
Diffuser: PC/PS
- Body Finish
White

Light Distribution

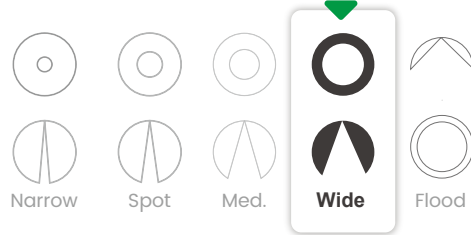

Mounting Information



3 Installation Methods: Ceiling Installation, Hanging Installation and Wall Installation




Triproof Light SMD Series(Side-clip Design)



Product Description

The SMD series of triple-protection lights are not only durable and functional, but also feature dustproof, waterproof, and shockproof capabilities. With a sleek design, they are perfect for a range of indoor and outdoor settings.

Dimension



TYPE E	TYPE U	TYPE G	TYPE F
Rated Power L-W-H (mm)	Rated Power L-W-H (mm)	Rated Power L-W-H (mm)	Rated Power L-W-H (mm)
/	80W 1800*105*69.5mm	80W 1800*80*69mm	80W 1800*90*75mm
54W 1500*71*58mm	60W 1500*105*69.5mm	60W 1500*80*69mm	60W 1500*90*75mm
36W 1200*71*58mm	40W 1200*105*69.5mm	40W 1200*80*69mm	40W 1200*90*75mm
18W 600*71*58mm	20W 600*105*69.5mm	20W 600*80*69mm	20W 600*90*75mm
Minimum size	Maximum size	Moderate size	Maximum height

Technical Details

IP65

RoHS

CB

CE

CRI≥80

30,000 Hrs

LM80

B10

Basic Details

Wattage

20W | 40W | 60W | 80W

Luminous

100lm/W | 120lm/W | 130lm/W | 140lm/W

CCT

3000K | 4000K | 5000K | 6500K

Input Voltage

220-240V/100-265V, 50/60Hz

Material

Body: PC,ABS
Diffuser: PC

Body Finish

White

Mounting Information

Recessed

Suspended

Surface

Track

Self Adhesive
Double Sided Tape

Light Distribution

Narrow

Spot

Med.

Wide

Flood

Installation Methods




Triproof Light SMD Series(Without Side Clips)



Product Description

The SMD series of triple-protection lights are not only durable and functional, but also feature dustproof, waterproof, and shockproof capabilities. With a sleek design, they are perfect for a range of indoor and outdoor settings.

Dimension



TYPE Q	TYPE T	TYPE TPF
Rated Power L-W-H (mm)	Rated Power L-W-H (mm)	Rated Power L-W-H (mm)
54W 1500*76*70mm	48W 1500*68*65mm	48W 1500*60*60mm
36W 1200*76*70mm	36W 1200*68*65mm	36W 1200*60*60mm
18W 600*76*70mm	18W 600*68*65mm	18W 600*60*60mm
Maximum size	Moderate size	Minimum size

Installation Methods



Technical Details

IP65

RoHS

CB

CE

CRI≥80

30,000 Hrs

LM80

B10

Basic Details

Wattage

18W | 36W | 48W

Luminous

100lm/W | 120lm/W | 130lm/W | 140lm/W

CCT

3000K | 4000K | 5000K | 6500K

Input Voltage

220-240V/100-265V, 50/60Hz

Material

Body: PC,ABS
Diffuser: PC

Body Finish

White

Mounting Information

Recessed

Suspended

Surface

Track

Self Adhesive
Double Sided Tape

Light Distribution

Narrow

Spot

Med.

Wide

Flood

Optional selection--Linkable




Tirproof Linear Lamp



Product Description

This Tir-proof linear lamp offers an exceptional value for money, making it an attractive option for a wide range of lighting needs. Its lightweight design ensures convenient handling and quick installation, while its high brightness effectively illuminates spaces, providing clear and bright lighting. Additionally, its IP65 waterproof rating ensures reliability and durability, even in wet or damp environments. Whether you're looking for a dependable outdoor light or a versatile indoor solution, this triple-proof light is a great choice.

Dimension




TPL6050	TPL5235	TPL4030
Rated Power L-W-H (mm)	Rated Power L-W-H (mm)	Rated Power L-W-H (mm)
48W 1500*50*60mm	48W 1500*35*52mm	48W 1500*30*40mm
36W 1200*50*60mm	36W 1200*35*52mm	36W 1200*30*40mm
18W 600*50*60mm	18W 600*35*52mm	18W 600*30*40mm
Maximum size	Moderate size	Minimum size


Installation Methods



Technical Details




Basic Details

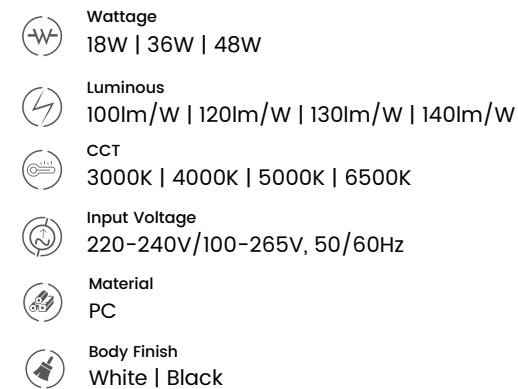

Mounting Information




Light Distribution

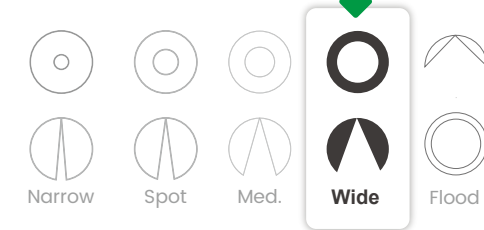

Optional selection--Linkable




Led Highbay Light

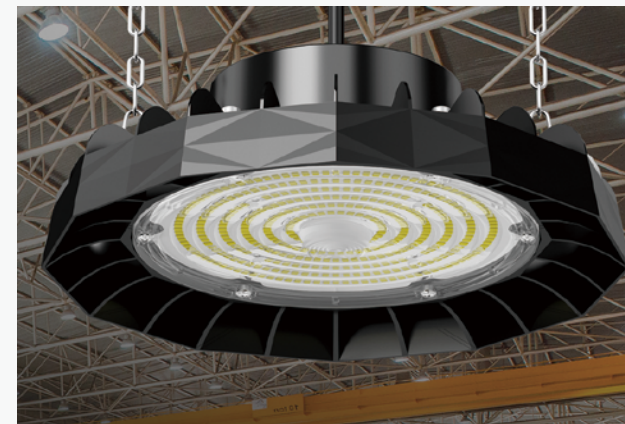

Product Description


-It With SMD3030/2835, this LED highbay light provides excellent lumen output, long-lasting stability and splendid sight.
-It is driven by high-end LED with long service life.
-Unique heat dissipation design and stable product performance.
-Excellent heat dissipation function, significantly improving service life and efficiency.
-0-10V, Dali, time dimming fit for different project demand.
additional Microwave induction, Light compensation function for choice.

Dimension




Rated Power D-H (mm)	100W 240*145mm
Rated Power D-H (mm)	150W 280*145mm
Rated Power D-H (mm)	200W 320*145mm
Rated Power D-H (mm)	240W 320*145mm

INSTALLATION

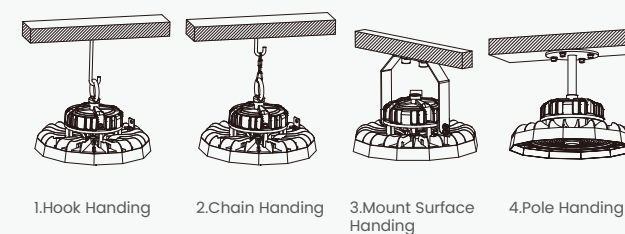


Technical Details



Basic Details




Mounting Information




Optional selection-Luminous Angle



Optional selection-multipl powersettings /CCT controlled by a dipswitch

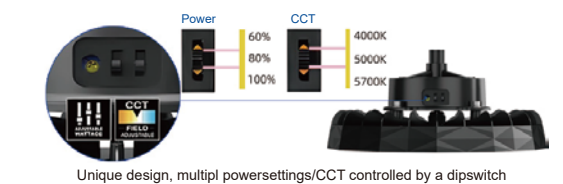

Optional selection-Microwave sensor /0-10V Dimmable

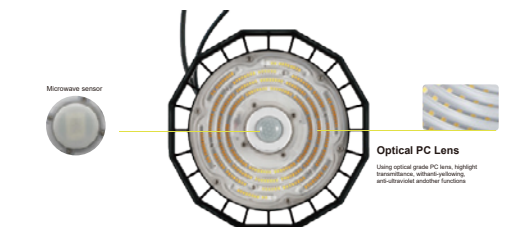


Led Bulkhead Lamp




Product Description

The LED Bulkhead Lamp offers IP65 waterproof protection, making it a perfect choice for installation in damp or wet environments. Boasting a sleek and minimalistic design, it complements any space with its elegant simplicity. Installation is straightforward and convenient. What's more, its high light-emitting efficiency ensures bright and uniform illumination, creating a cozy and welcoming atmosphere. Whether it's for the courtyard, garage, or any other damp area, this LED Bulkhead Lamp is the ideal solution for robust and reliable lighting.


Dimension

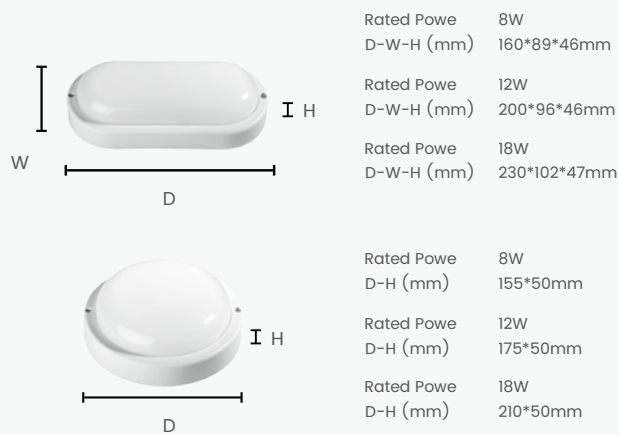

INSTALLATION STEPS

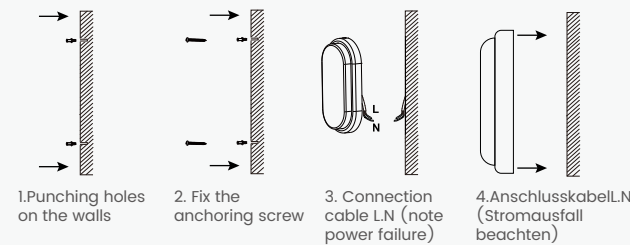


Technical Details




Basic Details




Mounting Information



Light Distribution

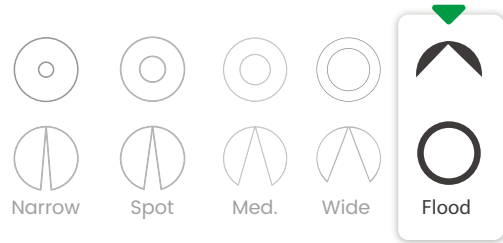

Optional selection ADD MICROWAVE SENSOR

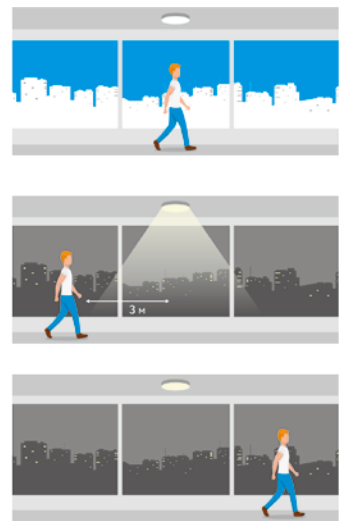


Led Flood Light




Product Description

The LED floodlight offers a sleek and powerful outdoor lighting solution. Its die-cast aluminum shell not only ensures durability but also facilitates efficient heat dissipation, ensuring optimal performance even in high-temperature environments. Additionally, its independent Driver scheme contributes to its stability, delivering a more reliable lighting experience. Whether for gardens, patios, or commercial areas, this LED floodlight is a great choice for any outdoor space.

Dimension

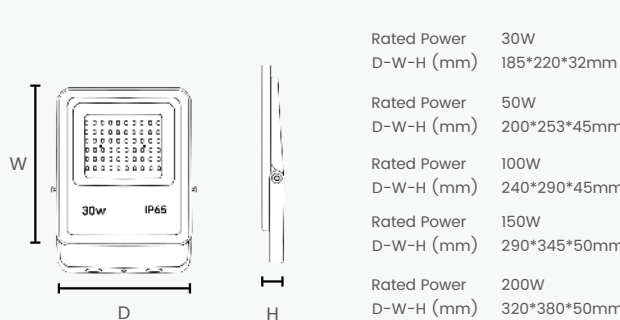


INSTALLATION STEPS

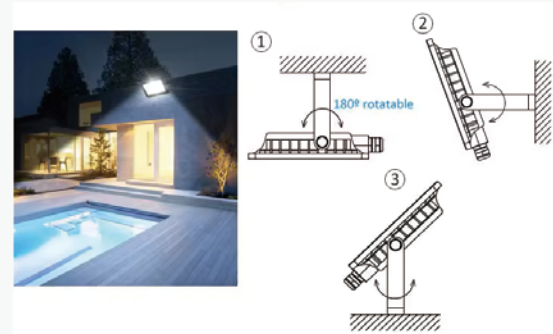


Technical Details




Basic Details

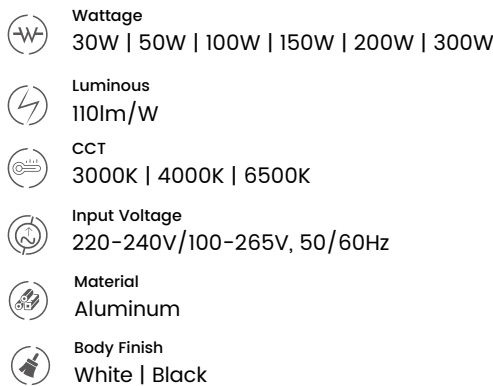

Mounting Information



Light Distribution

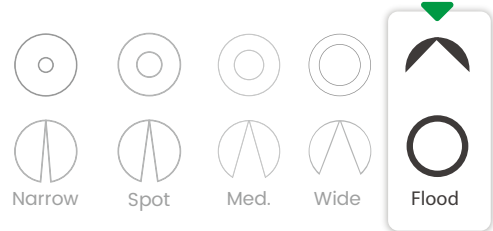



Product Description

This high-efficiency LED Flood Light delivers ultra-bright illumination for outdoor and commercial use. It offers unbeatable cost-effectiveness, ideal for both residential and bulk purchases.

An optional sensor head is available for auto on/off functionality, boosting energy savings and convenience. A durable, practical lighting solution.

Dimension



Rated Power: 10W
D-W-H: 90*70*26mm

Rated Power: 20W
D-W-H: 100*85*26mm

Rated Power: 30W
D-W-H: 100*85*26mm

Rated Power: 50W
D-W-H: 170*126*27mm

Rated Power: 70W
D-W-H: 220*165*28mm

Rated Power: 100W
D-W-H: 260*180*28mm

Rated Power: 150W
D-W-H: 310*220*28mm

Rated Power: 200W
D-W-H: 350*260*30mm

Product Details



Aluminum Lamp body, good performance of heat dissipation.



Body sensing lamp holder.



IP66 waterproof rubber, Prevent rainwater from entering the lamp body.



Adjustable bracket, Matte grinding treatment, durable and anti-aging.

Technical Details

IP65 RoHS CB CE CRI≥80

30,000 Hrs | LM80 | B10

Basic Details

Wattage
30W | 50W | 100W | 150W | 200W | 300W

Luminous efficiency
110lm/w


CCT
3000K | 4000K | 6500K

Input Voltage
220-240V | 165-265V, 50/60Hz

Material
Aluminium

Body Finish
White | Black

Light Distribution

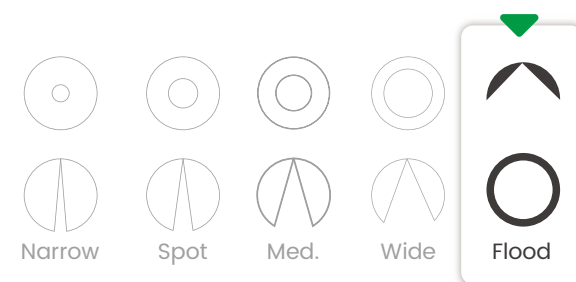

Optional selection

Add Microwave Sensor





Intelligent Control Flexible Application



SNES
The human body sensing distance is 8 to 12 meters (Adjust the increase clockwise)

TIME
About 20 seconds ~3minutes adjustable (Adjust the increase clockwise)


LUK
Work around the clock (Day/night mode adjustable)

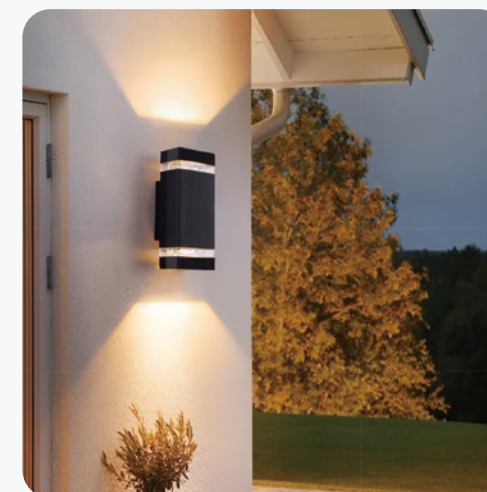

Product Description

This outdoor wall lamp boasts a sophisticated design and practical versatility. It is notable for its compatibility with both E27 and GU10 bulb bases, allowing for a diverse range of lighting options. Whether you're aiming for a cozy, inviting atmosphere or a bright, functional space, this wall lamp can accommodate your preferences with ease.

Dimension

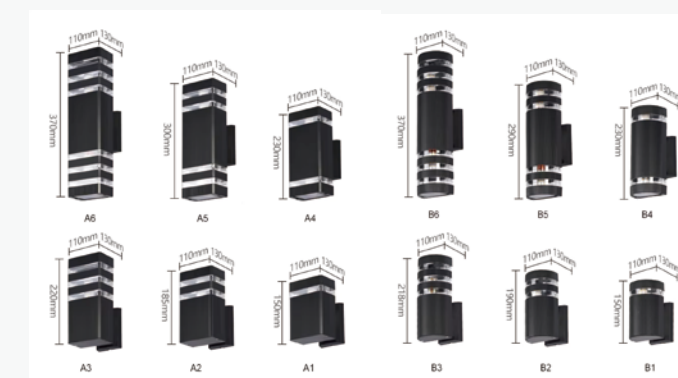

INSTALLATION STEPS



Technical Details

IP54 RoHS CB CE

30,000 Hrs | LM80 | B10

Basic Details

Wattage
From Bulb

Luminous efficiency
From Bulb

Material
Aluminum+PVC

Body Finish
White | Black | Grey



Base
E27 | GU10 lamp holder



Mounting Information



Light Distribution

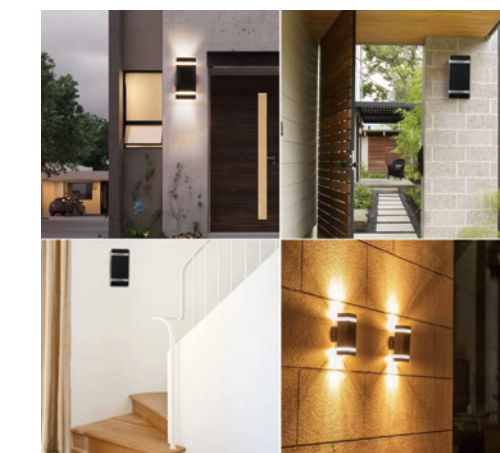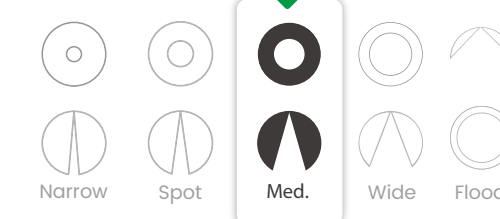


Porch Wall Mount Exterior Led Lamp



Product Description

This outdoor wall lamp boasts a sophisticated design and practical versatility. It is notable for its compatibility with both E27 bases, allowing for a diverse range of lighting options. Whether you're aiming for a cozy, inviting atmosphere or a bright, functional space, this wall lamp can accommodate your preferences with ease.

Dimension

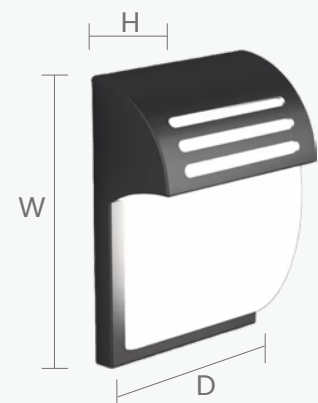

H-D-W: 200*155*90mm

H-D-W: 247*180*94mm

Technical Details


IP54 RoHS CB CE

30,000 Hrs | LM80 | B10


Basic Details

- Wattage
From Bulb
- Luminous efficiency
From Bulb
- Material
Aluminum+Glass
- Body Finish
White | Black | Grey
- Base
E27


Mounting Information



Light Distribution

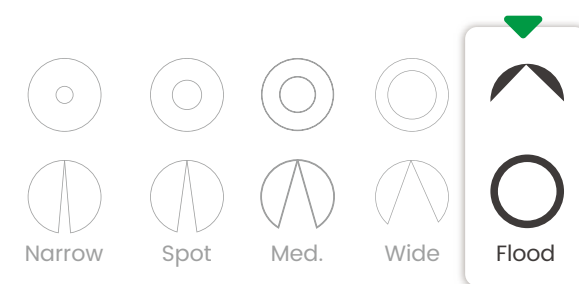


Thin Square Waterproof Wall Lamp

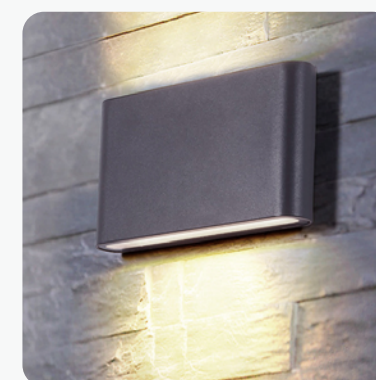

Product Description

This minimalist wall lamp, available in aluminum (for a premium look) or plastic (for economy), features a sleek rectangular design and emits a soft glow. Its modern aesthetic is perfect for a variety of settings.

Dimension

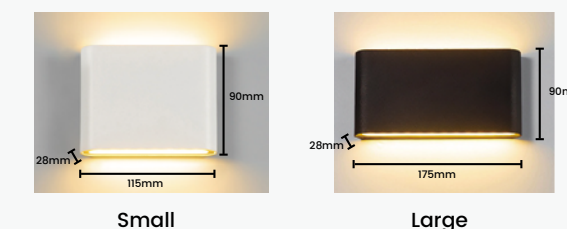

INSTALLATION STEPS



Technical Details

IP54 RoHS CB CE


30,000 Hrs | LM80 | B10

Basic Details


- Wattage
4W | 8W
- Luminous efficiency
70lm/W
- CCT
3000K | 4000K | 6500K
- Input Voltage
220-240V/100-265V,50/60Hz
- Material
Plastic | Aluminum
- Body Finish
White | Black




Mounting Information



Light Distribution

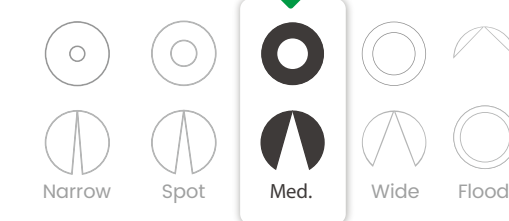

Optional selection--Add IR Sensor

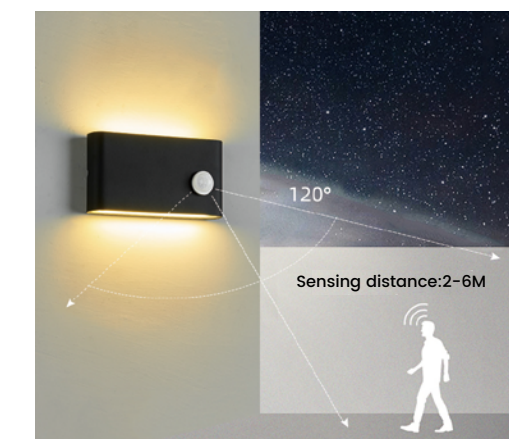





Minimalist Waterproof Wall Lamp




Product Description

This minimalist wall light features a sleek design with round and square options. Available in plastic (cost-effective) and aluminum (premium feel) versions, it produces soft light and is waterproof for added durability.

Dimension

	
TYPE:A Rated Power 6W 12W D-H (mm) 110*88 170*88	TYPE:B Rated Power 6W 12W D-H-W (mm) 110*110*88 170*170*88
	
TYPE:C Rated Power 6W 12W D-H (mm) 110*88 170*88	TYPE:D Rated Power 6W 12W D-H-W (mm) 110*110*88 170*170*88
	
TYPE:E Rated Power 6W 12W D-H (mm) 110*88 170*88	TYPE:F Rated Power 6W 12W D-H-W (mm) 110*110*88 170*170*88
	
TYPE:G Rated Power 6W 12W D-H (mm) 110*88 170*88	TYPE:H Rated Power 6W 12W D-H-W (mm) 110*110*88 170*170*88

	
TYPE:I Rated Power 6W D-H-W (mm) 160*100*75	TYPE:I-2 Rated Power 12W D-H-W (mm) 160*130*75
	
TYPE:J Rated Power 6W D-H-W (mm) 160*100*75	TYPE:J-2 Rated Power 12W D-H-W (mm) 160*130*75


Technical Details

IP54 RoHS CB CE
30,000 Hrs | LM80 | B10

Basic Details

Wattage 6W | 12W
Luminous efficiency 90lm/W (Without cover)
CCT 3000K | 4000K | 6500K
Input Voltage 220-240V/100-265V,50/60Hz
Material Plastic | Aluminum
Body Finish White | Black

Mounting Information



INSTALLATION STEPS



Linear Waterproof Wall Lamp



Product Description

This minimalist wall light features a sleek design with round and square options. Available in plastic (cost-effective) and aluminum (premium feel) versions, it produces soft light and is waterproof for added durability.

Dimension


	TYPE:A Rated Power 8W D-H-W (mm) 300*80*40 Rated Power 16W D-H-W (mm) 600*80*40 Rated Power 22W D-H-W (mm) 800*80*40 Rated Power 28W D-H-W (mm) 1000*80*40 Rated Power 30W D-H-W (mm) 1200*80*40 Rated Power 36W D-H-W (mm) 1500*80*40 Rated Power 48W D-H-W (mm) 2000*80*40
	TYPE:B Rated Power 8W D-H-W (mm) 300*80*40 Rated Power 16W D-H-W (mm) 600*80*40 Rated Power 22W D-H-W (mm) 800*80*40 Rated Power 28W D-H-W (mm) 1000*80*40 Rated Power 30W D-H-W (mm) 1200*80*40 Rated Power 36W D-H-W (mm) 1500*80*40 Rated Power 48W D-H-W (mm) 2000*80*40
	TYPE:C Rated Power 8W D-H-W (mm) 300*80*40 Rated Power 16W D-H-W (mm) 600*80*40 Rated Power 22W D-H-W (mm) 800*80*40 Rated Power 28W D-H-W (mm) 1000*80*40 Rated Power 30W D-H-W (mm) 1200*80*40 Rated Power 36W D-H-W (mm) 1500*80*40 Rated Power 48W D-H-W (mm) 2000*80*40

Technical Details


IP54 RoHS CB CE
30,000 Hrs | LM80 | B10

Basic Details


Wattage 8W | 16W | 22W | 28W | 30W | 36W | 48W
Luminous efficiency 90lm/W
CCT 3000K | 4000K | 6500K
Input Voltage 100-265V,50/60Hz
Material Iron+acrylic
Body Finish White | Black | Gold



Mounting Information



INSTALLATION STEPS

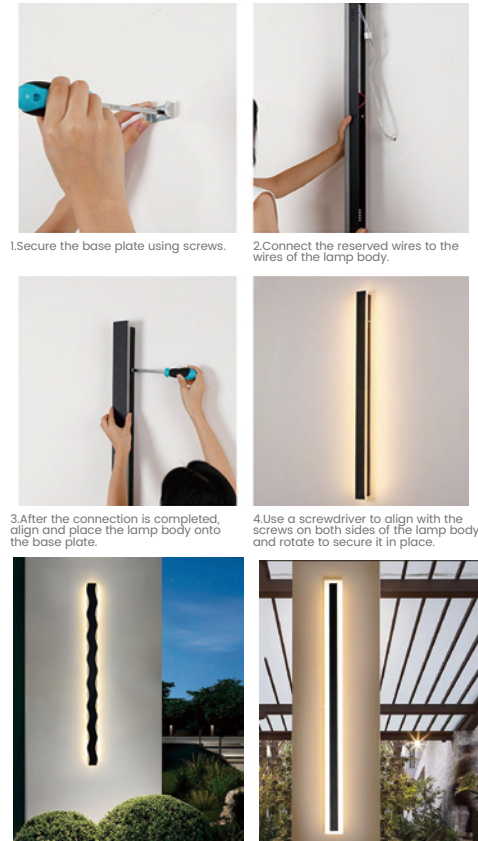


Wall Light--Touch Switch Control



Product Description

The wall lamps feature a sleek and minimalist design in black and white hues, available in both circular and rectangular shapes. They boast a unique touch-controlled functionality, allowing for effortless switching on and off. The illuminated circular or rectangular areas emit a soft glow, adding a touch of "Simple charm" to any modern interior.

Dimension

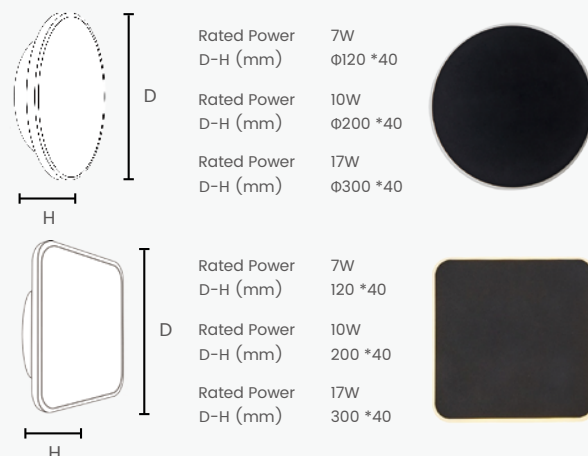

Technical Details

IP54 RoHS CB CE CRI≥80

30,000 Hrs | LM80 | B10

Basic Details

Wattage
7W | 10W | 17W

Luminous
80lm/W


CCT
3000K | 4000K | 6500K

Input Voltage
100-265V, 50/60Hz

Material
Iron+acrylic

Body Finish
White | Black | Grey

Mounting Information




Optional selection

CCT adjustable by turning on and off



INSTALLATION STEPS

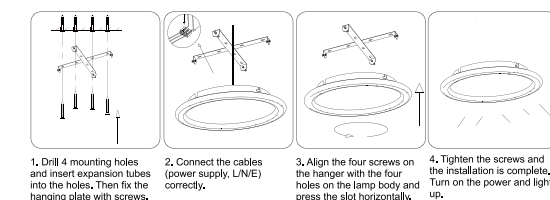


Led Marble&Iron Wall Lamp




Product Description

This modern wall lamp, crafted from metal, offers a sleek and sophisticated design. With its warm yellow or soothing white light, it enhances the ambiance of any room, blending seamlessly into various decors. Perfect for both style and function, it adds a touch of luxury to any home.


Dimension

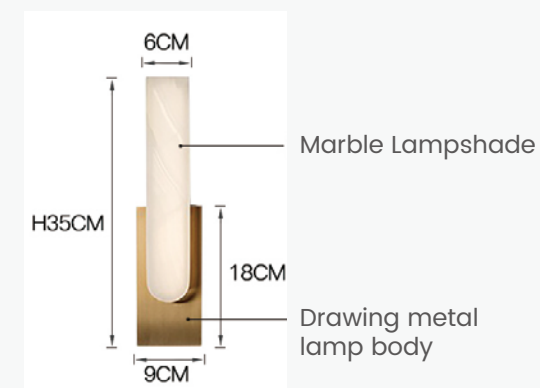

Mounting Information



Light Distribution

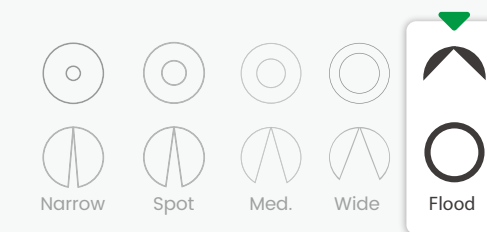

Technical Details

IP20 RoHS CB CE CRI≥80 UGR<19

30,000 Hrs | LM80 | B10

Basic Details


Wattage
10W

Luminous efficiency
60lm/W

CCT
2700K

Input Voltage
220-240V, 50/60Hz

Material
Marble+Iron



Lampshade made of marble

Made of marble, the texture is delicate, simple and elegant, and the transmitted light is soft and warm.

The lamp body adopts the preferred hardware material.

The hardware is preferred, and the paint process gives the details a simple, elegant, high-end fashion temperament.

Body Finish
White | Black | Gray | Green | Gold



Black

Gold



Gray

Green

White


Landscape Led Garden Lights



Product Description


The garden lamp is a striking fixture, boasting a retro yet elegant design. Its deep brown hue adds a touch of warmth and sophistication to any urban landscape. Standing gracefully on a broad city street, it provides a welcoming glow that complements the surrounding buildings, one adorned with intricate carvings and windows. The lamp's soft illumination creates a calming ambiance, ideal for a relaxing evening stroll or a quiet moment of reflection. As a timeless piece of outdoor lighting, it is not just a source of illumination but also an aesthetic enhancement, enhancing the beauty of any garden or cityscape.

Dimension

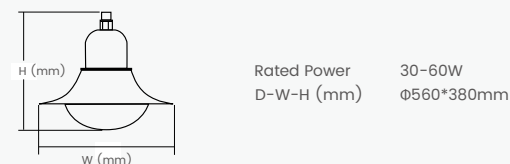

SUGGESTED INSTALLATION HEIGHT


Indirect lighting and a curved slope design of the lampshade allow luminaires to be installed on 3-6meter poles, but humans will not see the brightest point in the middle, which creates a human-friendly and soft lighting performance.

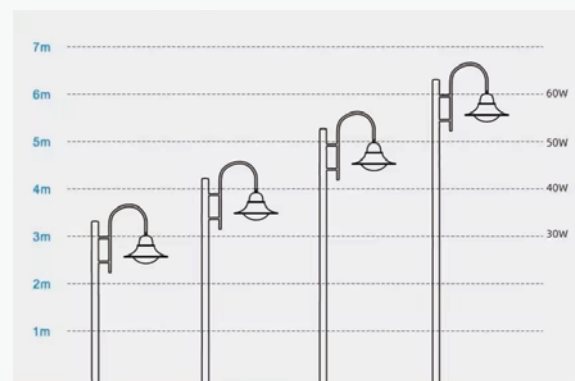


Technical Details



Basic Details

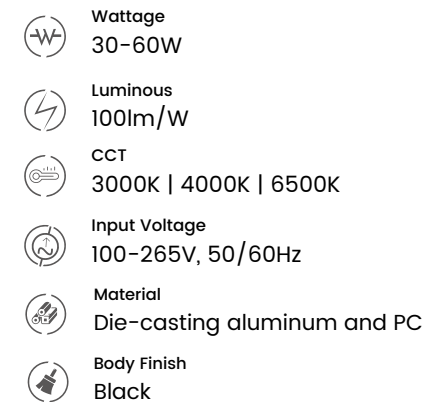

Mounting Information



Light Distribution




Led Street Light



Product Description


This sleek street light boasts exceptional cost-effectiveness, combining high brightness with an energy-efficient design. Its sleek gray finish and LED technology ensure optimal illumination for various outdoor environments.

Dimension

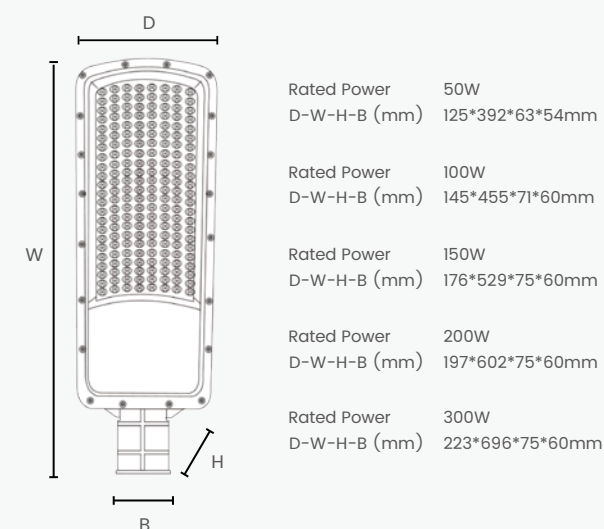

Installation Diagram

It can be installed horizontally and vertically as shown in the picture. Wide adjustable angles: from -0° to + 90°.

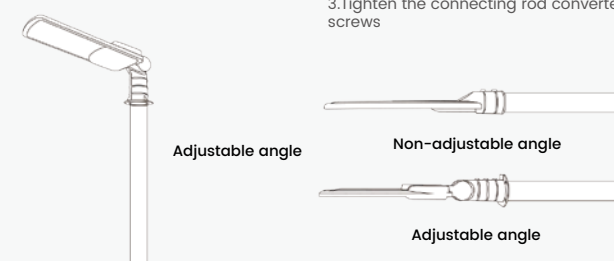


Technical Details




Basic Details



Mounting Information



Light Distribution

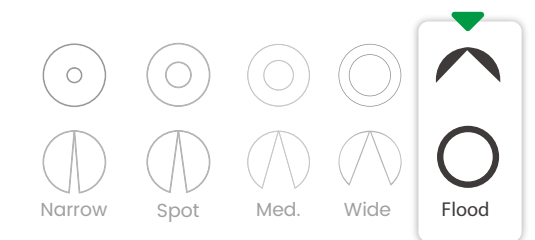


Optional selection

Adjustable angle/Non-adjustable angle.



Non-adjustable angle


Adjustable angle

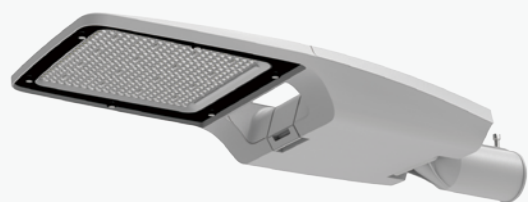


Product Description

- Smooth appearance and line design.-Up to 100,000hrs @ L70, low maintenancecost.
- It can be installed horizontally and verticallyand the adjustable angle is $\pm 15^\circ$.
- The protection grade is IP66 and IK08-Tool-less opening of driver box, ease of maintenance.
- ADC12 high-pressure cast aluminumone-piece shell great help for heat dissipation.
- High strength tempered glass lampshade withstronger light transmission performance.
- The hollow design is adopted between thelight source and the drive room to improve theair flow rate and heat dissipation capacity.
- Type I//ш//V light distribution can meetthe different requirements of road lighting.
- Strobo-free stable optical output, power factor0.95 Maintain the stability of the power grid.


Dimension

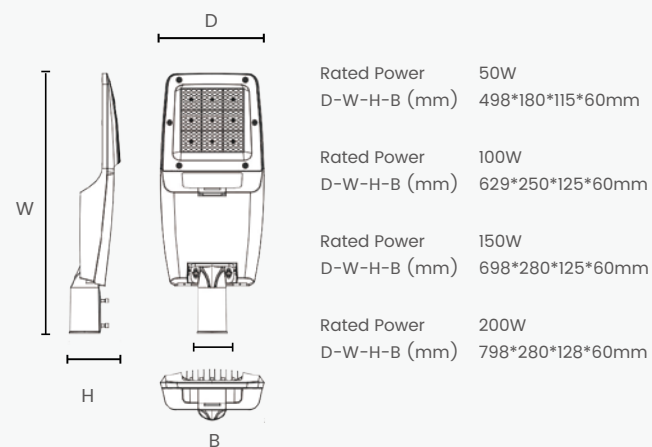


Installation Diagram

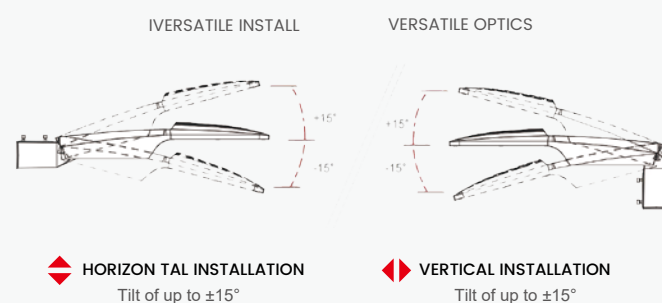

Technical Details




Basic Details

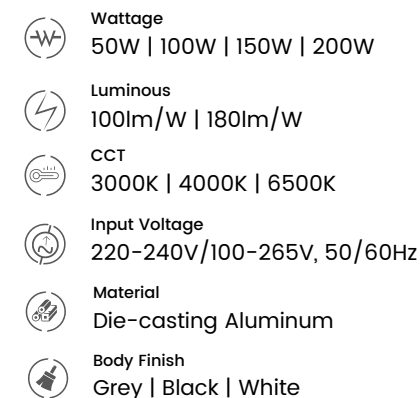

Light Distribution



Details

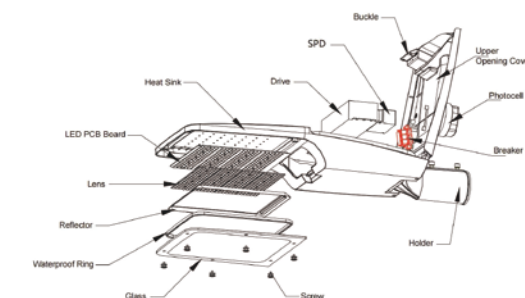

SOLAR ENERGY

Aladdin founded in1995

Rechargeable Flood Light



Product Description

Mains charging and solar-powered versions, it meets various outdoor needs. Mains charging model unaffected by rainy days, it provides a reliable source of bright illumination for outdoor use. Versatile and portable, it's your ideal lighting solution.. The solar-powered version converts sunlight into electricity, providing a sustainable lighting option. Both models are portable and perfect for construction sites, emergencies, or wherever bright light is needed. Versatile and powerful, this spotlight is your new outdoor lighting solution.



360° free rotation
Can be a bracket and handle, easy to use.



Waterproof switch
Waterproof and dustproof two-stop switch, easy to use.



Die-casting Aluminum
IP65 is waterproof, dustproof and corrosion-proof, weatherproof.

Technical Details

IP54 RoHS CB CE CRI≥80
20,000 Hrs | LM80 | B10

Basic Details



SR100

Solar rechargeable flood light
Material:Aluminum+Glass cover
Solar panels:3W CCT:6500K
Lumen: 700lm
Battery: 3.2v 5000mAh
Working time : 6-10hour
Dimming: Two switches-White light + Red Blue
Size:225*330*60mm



SR200

Solar rechargeable flood light
Material:Aluminum+Glass cover
Solar panels:6W CCT:6500K
Lumen: 1500lm
Battery:7500mAh
Working time : 6-10hour
Dimming: Two switches-White light + Red Blue
Size:270*340*55mm



R50

Rechargeable flood light
Material:Aluminum+Glass cover
CCT:6500K
Lumen: 300lm
Battery:5000mAh
Working time : 6-10hour
Dimming: Two switches-White light + Red Blue
Size: 215*275*47mm



R200

Rechargeable flood light
Material:Aluminum+Glass cover
CCT:6500K
Lumen: 1500lm
Battery:7500mAh
Working time : 6-10hour
Dimming: Two switches-White light + Red Blue
Size:270*340*55mm



R300

Rechargeable flood light
Material:Aluminum+Glass cover
CCT:6500K
Lumen: 2400lm
Battery:15000mAh
Working time : 6-10hour
Dimming: Two switches-White light + Red Blue
Size:300*360*65mm



R507

NEW
Rechargeable flood light (USB charging)
Material:Aluminum+Glass cover
CCT:5000K
Lumen: 3000lm
Battery:4400mAh
Working time : 2hour
USB port: 5V 0.2A
Size:242*203*130mm



Led Solar Flood Light




Product Description

This solar floodlight offers easy assembly and features an adjustable solar panel for optimal sunlight absorption. Boasting a bright LED light strip, it promises a powerful and illuminating performance. Perfect for various outdoor lighting needs, its adjustable angle allows for precise directional lighting. A convenient and energy-efficient choice for any space.


Dimension

H		Solar panels	1W
		D-W-H (mm)	145*35*170
		Solar panels	2W
		D-W-H (mm)	150*35*170
W		Solar panels	3W
		D-W-H (mm)	151*35*278
		Solar panels	4W
		D-W-H (mm)	240*210*40

Light Distribution

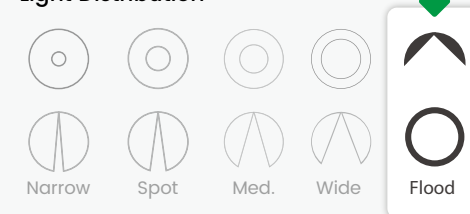

Mounting Information

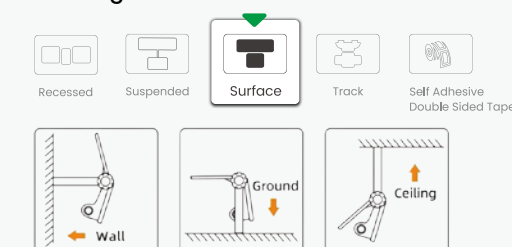

Technical Details

IP54 RoHS CB CE CRI≥80
20,000 Hrs | LM80 | B10

Basic Details



SF01-200
SF01-850
SF01-1500

Material:ABS+PET Laminate +Pc cover
Solar panels:1W CCT:6500K
Lumen: 200lm/850lm/1500lm
Battery: 18650 1800mAh/2600mAh/3000mAh
Detection distance : 4-6M
Mode:when people pass by the light is on 30s, no detection no light
Trigger times:540times(200lm),150times(850lm), 120times (1500lm)
(Suitable for areas where many people pass by and plenty of sunlight)



SF02-200
SF02-850
SF02-1500

Material:ABS+PET Laminate +Glass cover
Solar panels:2W CCT:6500K
Lumen: 200lm/850lm/1500lm
Battery: 18650 1800mAh/2600mAh/3000mAh
Detection distance : 4-6M
Mode:when people pass by the light is on 30s , when people leave ,Slightly bright for 100lm
(Suitable for areas where many people pass by)



SF03-200
SF03-850
SF03-1500

Material:ABS+PET Laminate +Glass cover
Solar panels:3W CCT:6500K
Lumen: 200lm/850lm/1500lm
Battery: 18650 1800mAh/2600mAh/3000mAh
Detection distance : 4-6M
Mode:when people pass by the light is on 30s , when people leave ,Slightly bright for 100lm
(Suitable for areas where many people pass by and Insufficient sunlight)



SF03-2000


Material:Aluminum/ABS+PET Laminate +Glass cover
Solar panels:2W CCT:6500K
Lumen: 2000lm
Battery: 18650 2600mAh
Detection distance : 4-6M
Mode:when people pass by the light is on 30s, no detection no light
(Suitable for areas where less people pass by , Provide brighter lighting)



SF04-2500

Material:Aluminum/ABS+PET Laminate +Glass cover
Solar panels:4W CCT:6500K
Lumen: 2500-3000lm
Battery: 18650 2pcs*2600mAh
Detection distance : 4-6M
Mode:when people pass by the light is on 30s, no detection no light
(Suitable for areas where less people pass by , Provide brighter lighting)

Installation method

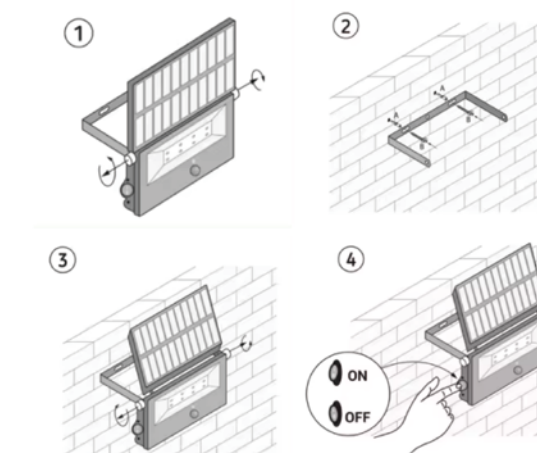


Led Solar Street Light




Product Description

This LED Solar Street Light is very cost-effective, boasting features such as human body sensing and remote control. With three flexible installation options, they can be mounted on walls, poles, or brackets. Each fixture emits a warm yellow glow from its LED bulbs, providing effective illumination. The human body sensing feature ensures automatic lighting when needed, while the remote control allows for convenient adjustment of brightness and working hours, further enhancing their practicality and energy efficiency.

Multiple installation methods

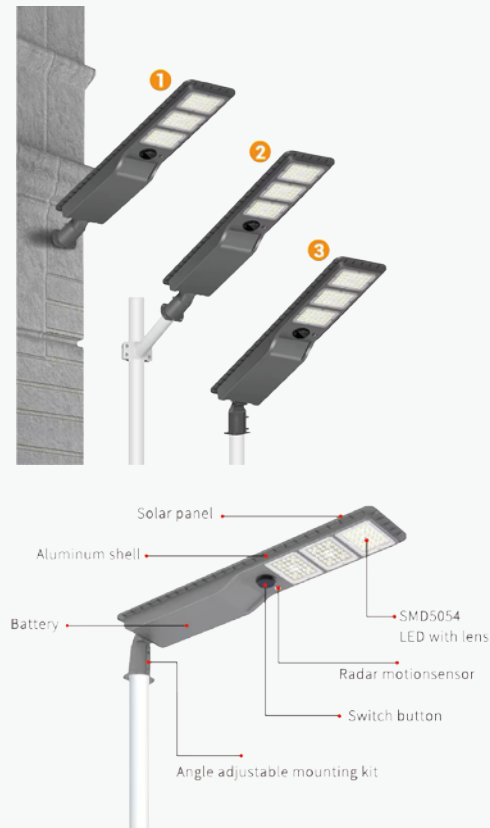

Technical Details



Basic Details



Solar Street Light
Material: Aluminum
Solar panels: 15w
Color temperature: 6500K
Lumen: 2000lm
Battery: 3.2v 10000mAh
Charging time: 4-6hour
Working time: 12hour
Size: 573*200*90mm
Lighting method: infrared sensor + segmented time control + intelligent control




Solar Street Light
Material: Aluminum
Solar panels: 15w
Color temperature: 6500K
Lumen: 3000lm
Battery: 3.2v 15000mAh
Charging time: 4-6hour
Working time: 12hour
Size: 753*200*90mm
Lighting method: infrared sensor + segmented time control + intelligent control



Solar Street Light
Material: Aluminum
Solar panels: 30w
Color temperature: 6500K
Lumen: 4000lm
Battery: 3.2v 25000mAh
Charging time: 4-6hour
Working time: 12hour
Size: 1055*200*90mm
Lighting method: infrared sensor + segmented time control + intelligent control

Remote Control

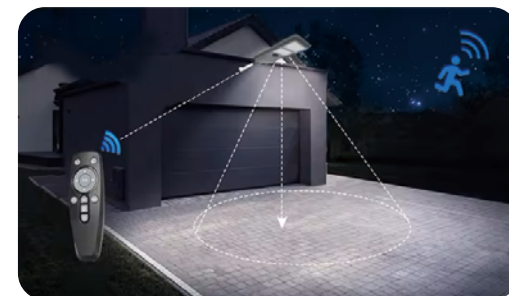

Sensor Control



Led Solar Camping Light



Product Description

Designed for convenience, it offers detachable lighting for flexible use and solar charging for eco-friendly power. Easily switch between various ambient colors to set the perfect mood. With USB charging capability, it also doubles as a power bank to keep your devices charged. Compact, reliable, and versatile, it's the perfect companion for all your outdoor adventures.

Multiple Functions



Detachable Double lights



Portable Flashlight



Multi-color light source



Solar Charging / Phone Charging

Basic Details



Material: ABS, PP
Solar panels: 0.27W
Color temperature: 3000K
Lumen: 300lm
Battery: 2*1200mAh
Charging time: 4hour
Charging Port: Type-c
Working time: 4hour
(Low Light for 8 Hours)
K1 Strong Light - Low Light - Off.
K2 Multicolor Single Color - Off
(Long press for multicolor cycle - color change every 2 seconds)



Flashlight
Material: ABS, PP
Color temperature: 6500K
Lumen: Side Light 140lm
XPE 75lm
Battery: 1*800mAh
Charging time: 4hour
Charging Port: Type-c
Working time: 3.5hour (Side Light)
(XPE for 4.5 Hours)
Strong Light - Low Light - XPE - Off



Material: ABS, PP
Solar panels: 0.27W
Color temperature: 3000K
Lumen: 300lm
Battery: 2*1200mAh
Charging time: 4hour
Charging Port: Type-c
Working time: 4hour
(Low Light for 8 Hours)
K1 Strong Light - Low Light - Off.
K2 Multicolor Single Color - Off
(Long press for multicolor cycle - color change every 2 seconds)



Material: ABS, PP
Solar panels: 0.27W
Color temperature: 3000K
Lumen: 300lm
Battery: 2*1200mAh
Charging time: 4hour
Charging Port: Type-c
Working time: 4hour
(Low Light for 8 Hours)
K1 Strong Light - Low Light - Off.
K2 Multicolor Single Color - Off
(Long press for multicolor cycle - color change every 2 seconds)



Flashlight
Material: ABS, PP
Color temperature: 6500K
Lumen: Side Light 20lm
XPE 75lm
Battery: 1*400mAh
Charging time: 4hour
Charging Port: Type-c
Working time: 4hour (Side Light)
(XPE for 4 Hours)
Front Light: Strong Light - Low Light - Strobe - Side Light On - Off

COB Light Core

Wide Range Illumination

Light Switch

Long Range- Strong Floodlight
-Floodlight Strobe

XPE Light Core

Focused Long Range Illumination




Led Solar Highbay Light



Product Description

- ✓ Dual Mounting Options – Can be hung from ceilings or wall-mounted, offering flexible installation for warehouses, garages, barns, and outdoor areas.
- ✓ Adjustable Color Temperature (3000K-6500K) – Remote control allows easy switching between warm white, neutral, and cool white light for different needs.
- ✓ Smart Auto Sensors – Equipped with motion detection (PIR) and When the solar panels stop absorbing sunlight, the lights will turn on.
- ✓ Dual Charging Modes – Powered by solar panels (eco-friendly) or AC plug-in (backup charging), ensuring uninterrupted operation.
- ✓ Energy-Efficient & Long-Lasting – High-lumen LED chips provide bright illumination while saving power, with a lifespan of 30,000+ hours.

Dimension

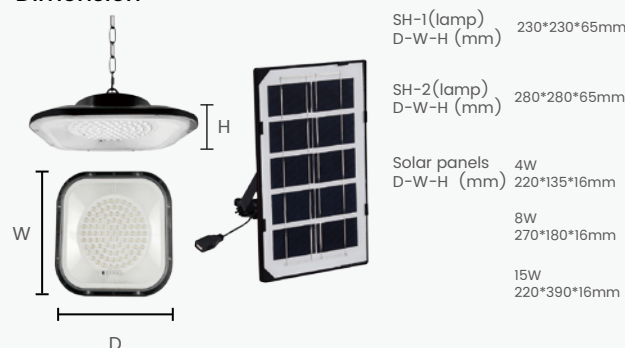

Technical Details

IP65 RoHS CB CE CRI≥80

30,000 Hrs | LM80 | B10

Basic Details

Solar panels
4W | 8W | 15W

Material
ABS, PC
CCT

Three Color Dimming



Lumen
650lm | 1150lm | 1600lm

Battery: 3500/5000/10000mAh
Charging time: 2.5/3.5/7.5hour
Working time : 8hour




Product function
Optical control+Remote control




Mounting Information



Light Distribution

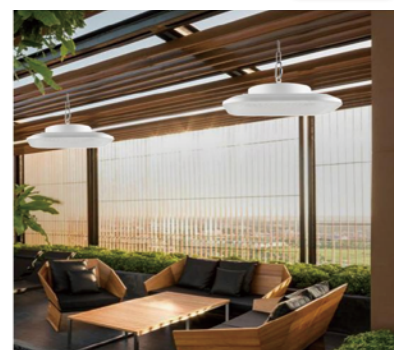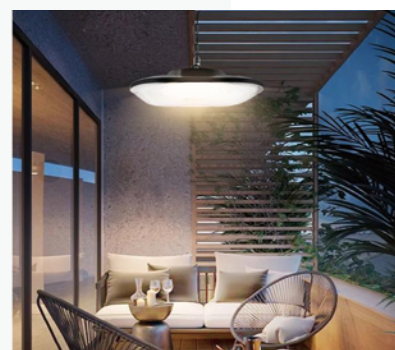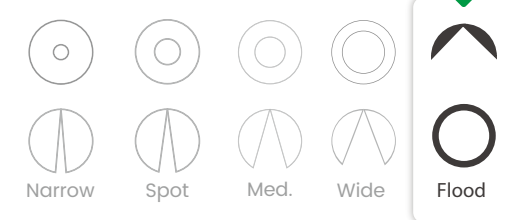

Led Solar Courtyard Wall Light

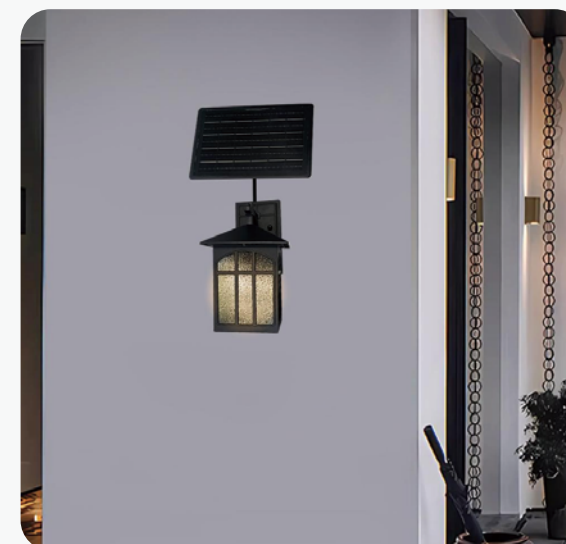


Product Description

Enhance your outdoor space with our solar-powered courtyard wall light, featuring an energy-efficient LED filament bulb for a warm, vintage-inspired glow. Designed for longer runtime and quick charging, its detachable solar panel ensures optimal sunlight absorption.

Key Features:

- ✓ High-efficiency LED filament bulb – Bright yet energy-saving
- ✓ Extended battery life – Illuminates longer after a full charge
- ✓ Classic retro design – Elegant aesthetics for any garden or patio
- ✓ Independent solar panel – Adjustable for faster charging
- ✓ Weather-resistant – Durable for year-round use

Basic Details




SCW01





Material:Aluminium
Solar panels: 8W
Color temperature: From bulb
Lumen: 280lm
Battery: 5000mAh
Charging time: 8hour
Working time : 12hour
IP Rating : IP65

Built-in high-efficiency LED filament light source, offering longer-lasting performance and a more retro aesthetic appeal.

More types



SCW02

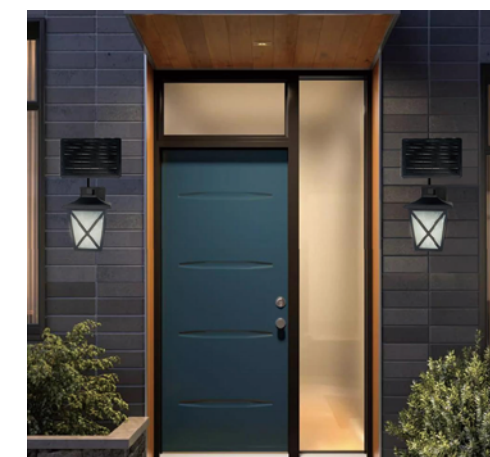

SCW03



Material: ABS
Solar panels: 5W
Lumen: 280lm
Battery: 5000mAh
Charging time: 8hour
Working time : 12hour
IP Rating : IP65
Color temperature: 3000K/
4000K/
6500K

COMMERCIAL LIGHTING

Aladdin founded in1995

Magic Series Magnetic Light



Product Description

LED magnetic track lights are versatile and adjustable fixtures that magnetically attach to a track system. They offer easy installation, disassembly, and relocation, allowing for convenient adjustment of lighting angle and position. With a range of power specifications, brightness, and color temperature options, they provide both functional and decorative benefits for indoor spaces.



折叠泛光灯/Folding floodlight

产品细节/Product Details



正面/Facade 正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-ZF6W	6w	3000K/4000K/6000K	26x94x120mm	> 90	塑料 铝/PC AL
MG-ZF12W	12w	3000K/4000K/6000K	26x94x235mm	> 90	塑料 铝/PC AL



折叠格栅灯/Folding grille light

产品细节/Product Details



正面/Facade 正面/Facade 正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-ZG6W	6w	3000K/4000K/6000K	26x94x120mm	> 90	塑料 铝/PC AL
MG-ZG12W	12w	3000K/4000K/6000K	26x94x235mm	> 90	塑料 铝/PC AL



折叠蜂窝格栅灯/Folding honeycomb grille light

产品细节/Product Details



正面/Facade 正面/Facade 正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-ZGF6W	6w	3000K/4000K/6000K	26x94x120mm	> 90	塑料 铝/PC AL
MG-ZGF12W	12w	3000K/4000K/6000K	26x94x235mm	> 90	塑料 铝/PC AL



泛光灯/Floodlight


产品细节/Product Details



正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-F6W	6w	3000K/4000K/6000K	29x26x120mm	> 90	塑料 铝/PC AL
MG-F12W	12w	3000K/4000K/6000K	29x26x235mm	> 90	塑料 铝/PC AL



泛光灯/Floodlight

产品细节/Product Details



正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-F18W	18w	3000K/4000K/6000K	29x30x450mm	> 90	塑料 铝/PC AL



格栅灯/Grille light

产品细节/Product Details



正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-G6W	6w	3000K/4000K/6000K	29x26x120mm	> 90	塑料 铝/PC AL
MG-G12W	12w	3000K/4000K/6000K	29x26x235mm	> 90	塑料 铝/PC AL



格栅灯/Grille light

产品细节/Product Details



正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-G18W	18w	3000K/4000K/6000K	29x30x450mm	> 90	塑料 铝/PC AL



蜂窝格栅灯/Honeycomb grille light


产品细节/Product Details



正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-GF6W	6w	3000K/4000K/6000K	29x26x120mm	> 90	塑料 铝/PC AL
MG-GF12W	12w	3000K/4000K/6000K	29x26x235mm	> 90	塑料 铝/PC AL



6w轨道射灯 / 6wTrack light

产品细节/Product Details



正面/Facade 正面/Facade

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-S6W	6w	3000K/4000K/6000K	ø27x118mm	> 90	塑料 铝/PC AL



轨道射灯 / Track light

产品细节/Product Details



正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-S10W	10w	3000K/4000K/6000K	ø45x120mm	> 90	塑料 铝/PC AL
MG-S20W	20w	3000K/4000K/6000K	ø65x140mm	> 90	塑料 铝/PC AL



双头轨道射灯/Double track light

产品细节/Product Details



正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-S10W2	10w*2	3000K/4000K/6000K	ø45x100mm*2	> 90	塑料 铝/PC AL



吊线灯 B/ Suspension light B

产品细节/Product Details



正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-D87W	7w	3000K/4000K/6000K	ø85x75mm	> 90	塑料 铝/PC AL



吊线灯 C / Suspension light C

产品细节/Product Details



正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-DC3W	3w	3000K/4000K/6000K	ø65x70mm	> 90	塑料 铝/PC AL

Magic Series Magnetic Light



吊线灯 D/ Suspension light D

产品细节/Product Details

正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-DD8W	8w	3000K/4000K/6000K	Φ42x280mm	> 90	塑料 铝/PC AL



吊线灯 E/ Suspension light E

产品细节/Product Details

正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-DE10W	10w	3000K/4000K/6000K	Φ100mm	> 90	塑料 铝/PC AL



吊线灯 G/ Suspension light G

产品细节/Product Details

正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-DG8W	8w	3000K/4000K/6000K	Φ64x120mm	> 90	塑料 铝/PC AL



吊线灯/Pendant light

产品细节/Product Details

正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-DBW	8w	3000K/4000K/6000K	Φ30x30mm	> 90	塑料 铝/PC AL



彩瓷吊线灯/Colorful spot light

产品细节/Product Details

正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-CC10W	10w	3000K/4000K/6000K	Φ70x120mm	> 90	塑料 铝/PC AL




魔球射灯/Colorful pendant light

产品细节/Product Details

正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-MQ5W	5w	3000K/4000K/6000K	Φ50x35mm	> 90	塑料 铝/PC AL




京瓷壁灯/Wall lamp

产品细节/Product Details

正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-JC12W	12w	3000K/4000K/6000K	Φ165x38mm	> 90	塑料 铝/PC AL



磁吸夕阳灯/Sunset light

产品细节/Product Details

正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-Sun10w	10w	3000K/4000K/6000K	Φ72x40mm	> 90	塑料 铝/PC AL




磁吸切光灯/ Shapeable and Zoomable light

产品细节/Product Details

背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-VG10W	10w	3000K/4000K/6000K	Φ44x153.5mm	> 95	塑料 铝/PC AL



磁吸灯管/ Tube light

产品细节/Product Details

光效/Efficacy

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-DG10W	10w	3000K/4000K/6000K	Φ26x300mm	> 90	塑料 铝/PC AL
MG-DG20W	20w	3000K/4000K/6000K	Φ26x600mm	> 90	塑料 铝/PC AL




磁吸软管/ Hose light

产品细节/Product Details

光效/Efficacy

产品详细参数/Product specification


型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-RG10W	10w	3000K/4000K/6000K	Φ22x1000mm	> 90	塑料 铝/PC AL
MG-RG20W	20w	3000K/4000K/6000K	Φ22x2000mm	> 90	塑料 铝/PC AL



超薄轨道/Ultra-thin Rail

产品详细参数/Product specification


型号/Model	尺寸/Size	材质/Material
GF-TQ26-CB	26x6mm	铝 铁 铜/ AL Iron Copper



暗装轨道/Concealed Rail

产品详细参数/Product specification


型号/Model	尺寸/Size	材质/Material
GF-TQ26-A	63x33.2mm	铝 铁 铜/ AL Iron Copper



防开裂暗装轨道/Anti cracking concealed Rail

产品详细参数/Product specification


型号/Model	尺寸/Size	材质/Material
GF-TQ26-F	63x33.2mm	铝 铁 铜/ AL Iron Copper



防开裂批灰轨道/Anti cracking batch gray Rail

产品详细参数/Product specification


型号/Model	尺寸/Size	材质/Material
GF-TQ26-PH	63x33.2mm	铝 铁 铜/ AL Iron Copper



嵌入式轨道/Recessed Rail

产品详细参数/Product specification

型号/Model	尺寸/Size	材质/Material
GF-TQ26-M	40.4x36mm	铝 铁 铜/ AL Iron Copper



覆膜轨道/Film covered Rail

产品详细参数/Product specification

型号/Model	尺寸/Size	材质/Material
GF-TQ26-RUC	56.8x42.6mm	铝 铁 铜/ AL Iron Copper



DC48V电源/Power supply

产品详细参数/Product specification


型号/Model	功率/Power	尺寸/Size	材质/Material
MG-P100W	100W	230x26x23mm	铝 铁 铜/ AL Iron Copper
MG-P200W	200W	270x26x23mm	铝 铁 铜/ AL Iron Copper



超薄导电盒/Ultra-thin Conductive box

产品详细参数/Product specification

型号/Model	功率/Power	尺寸/Size	材质/Material
MG-Power	-	26x26x120mm	铝 铁 铜/ AL Iron Copper



超薄遮线盒/Conductive box for power supply

产品详细参数/Product specification

型号/Model	功率/Power	尺寸/Size	材质/Material
MG-Wire box	-	26x26x103mm	铝 铁 铜/ AL Iron Copper

LED Pendant Light



Product Description

This adjustable pendant light offers both spot and flood beam options, perfect for task or ambient lighting. Choose from multiple color finishes to match your decor, featuring energy-efficient LED technology with dimmable brightness. Ideal for kitchens, dining areas, and workspaces.


Key Features:

- ✓Spot & flood beam adjustment
- ✓Matte black / gold / white/ brown finishes
- ✓Easy to install

Dimension




Optional selection-Color Options

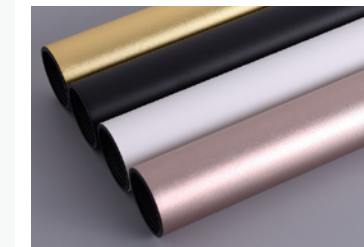

- ☐ Gold
- ☐ Black
- ☐ White
- ☐ Brown


Technical Details




Basic Details

-  **Wattage**
3W | 5W | 7W
-  **Luminous efficiency**
80lm/w
-  **CCT**
3000K | 4000K | 6500K
-  **Input Voltage**
220-240V, 50/60Hz
-  **Material**
Aluminium


Mounting Information



Light Distribution

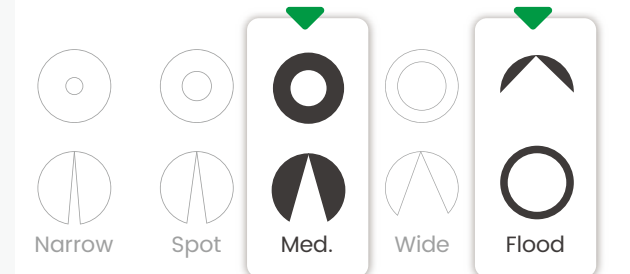

Optional selection--Floodlight/Spotlight



Multi-Head Cob Led Downlight



Product Description

minimalist in design and effortless to install, they offer a comfortable glow and bright illumination. Whether you need a single-head light for focused task lighting or multiple heads for ambient lighting in larger spaces, our downlights provide the perfect solution. Choose the configuration that best suits your needs and enjoy a cozy atmosphere in any setting.

Dimension

	Rated Power	10W
	L-W-H (mm)	117*117*55
	Rated Power	20W
	L-W-H (mm)	117*226*55
	Rated Power	30W
	L-W-H (mm)	117*328*55
	Rated Power	40W
	L-W-H (mm)	226*226*55



Technical Details

IP20	RoHS	CB	CE	CRI≥80	UGR<19
30,000 Hrs	LM80	B10			


Basic Details

Wattage	10W 20W 30W 40W
Luminous	90lm/W
CCT	2700K 3000K 4000K 5000K 6500K
Input Voltage	220-240V, 50/60Hz
Material	Aluminum
Body Finish	White Black


Mounting Information



Light Distribution

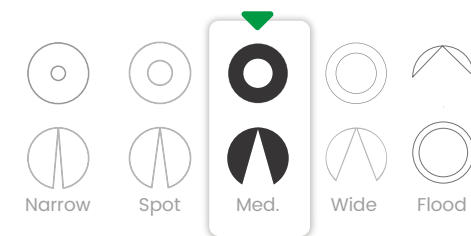

INSTALLATION

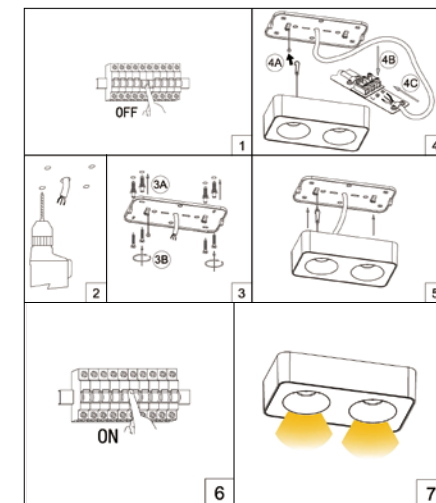

Surface-mounted Adjustable Angle Downlight




Product Description

This collection of ceiling-mounted adjustable downlights features sleek circular shades in various colors and designs. The white shades with black accents and the black shades with subtle holes offer a modern look, suitable for a range of interior settings. The adjustable angle function allows for precise lighting control, enhancing the versatility of these stylish fixtures.

Dimension

	Rated Power	5W
	D-H (mm)	75*55
	Rated Power	7W
	D-H (mm)	75*55
	Rated Power	10W
	D-H (mm)	75*55

INSTALLATION STEPS

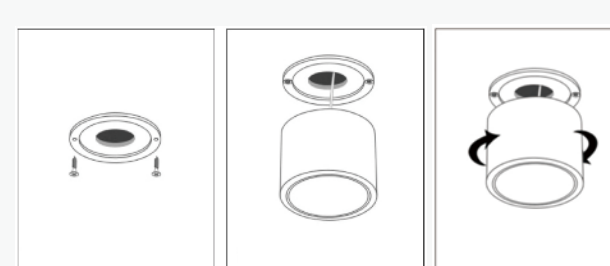

1. Install the base-board on the top.
2. Connect the wires
3. Rotate the lamp upwards and tighten it.


Technical Details

IP20	RoHS	CB	CE	CRI≥85
30,000 Hrs	LM80	B10		



Basic Details

Wattage	5W 7W 10W
Luminous efficiency	75lm/W
CCT	3000K 4000K 6500K
Input Voltage	220-240V , 50/60Hz
Material	Aluminum
Body Finish	Lamp body: White Black Reflector cup: White Black

Mounting Information

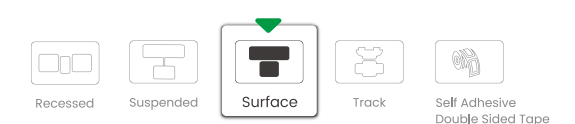

Light Distribution

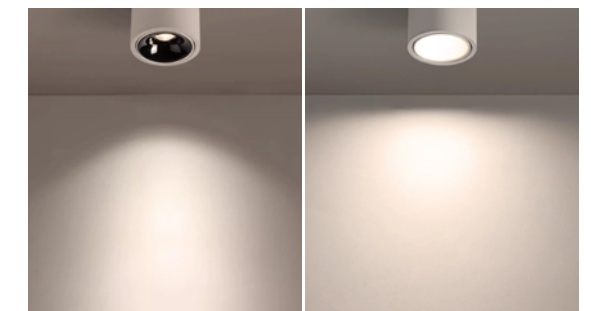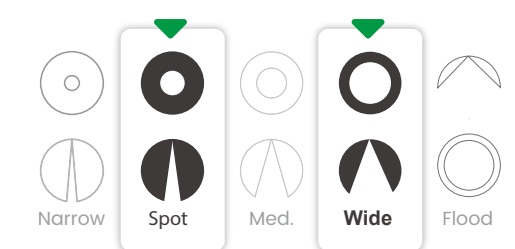

Spot: 38°

Wide: 150°

LED Surface-mounted Downlight



Product Description


- Cylindrical Surface-Mounted Downlight
- ✓ Sleek & Minimalist: Simple cylindrical design in premium die-cast aluminum
- ✓ Anti-Glare: Comfortable lighting with glare control
- ✓ Multiple Sizes: Flexible options for different spaces
- ✓ Surface-Mount: Easy installation (no recess needed)

Dimension




- Rated Powe: 7W
W-H : $\Phi 75 \times H65 \text{mm}$
- Rated Powe: 9W
W-H : $\Phi 95 \times H68 \text{mm}$
- Rated Powe: 12W
W-H : $\Phi 120 \times H70 \text{mm}$
- Rated Powe: 18W
W-H : $\Phi 148 \times H80 \text{mm}$
- Rated Powe: 36W
W-H : $\Phi 215 \times H100 \text{mm}$


Installation Steps

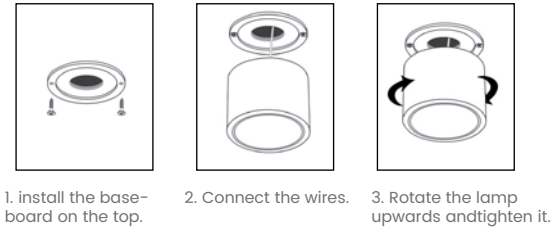


Technical Details




Basic Details

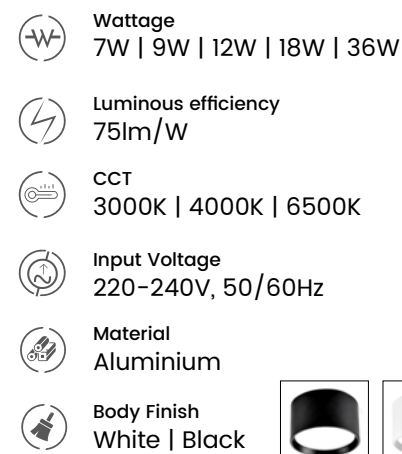

Mounting Information



Light Distribution

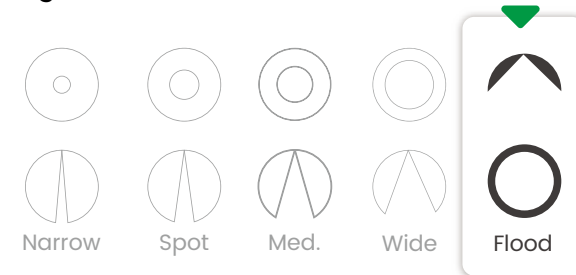


Surface Mounted Foldable COB Downlight



Product Description

The Surface-Mounted Foldable COB Downlight is a sleek and modern lighting fixture. With its COB technology, it provides efficient and uniform lighting. Its foldable design offers flexibility in installation, making it suitable for various spaces. The adjustable lens allows precise light direction, perfect for various tasks. The white and black variants blend well with any interior, enhancing the overall aesthetic. Long-lasting, energy-efficient, and safe, it's an ideal choice for modern lighting needs.


Dimension

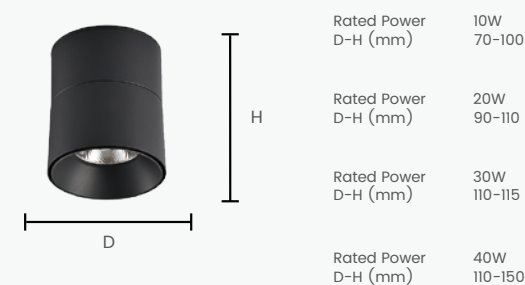


Technical Details




Basic Details



Mounting Information



Light Distribution

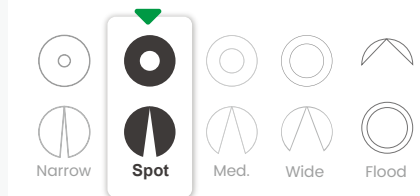

10W Rated Power

Lumen : 800lm Efficacy : 80lm/W CCT : 3000K	Lumen : 900lm Efficacy : 90lm/W CCT : 4000K	Lumen : 900lm Efficacy : 90lm/W CCT : 6000K
---	---	---

20W Rated Power

Lumen : 1600lm Efficacy : 80lm/W CCT : 3000K	Lumen : 1800lm Efficacy : 90lm/W CCT : 4000K	Lumen : 1800lm Efficacy : 90lm/W CCT : 6000K
--	--	--

30W Rated Power

Lumen : 2400lm Efficacy : 80lm/W CCT : 3000K	Lumen : 2700lm Efficacy : 90lm/W CCT : 4000K	Lumen : 2700lm Efficacy : 90lm/W CCT : 6000K
--	--	--

40W Rated Power

Lumen : 3200lm Efficacy : 80lm/W CCT : 3000K	Lumen : 3600lm Efficacy : 90lm/W CCT : 4000K	Lumen : 3600lm Efficacy : 90lm/W CCT : 6000K
--	--	--

Powered by



Power Supply



COB Track Spotlight



Product Description

COB Track Spotlight

✓Adjustable Angles: Flexible multi-directional lighting to highlight different areas.

✓COB Focus: High-intensity, uniform light with a compact COB (Chip-on-Board) design.

✓Aluminum Body: Excellent heat dissipation for durability and long-lasting performance. Ideal for accent lighting in homes, shops, or galleries!

Dimension



Rated Powe: 20w

D-L : 75*175mm


Rated Powe: 15w

D-L: 62*159mm

Rated Powe: 10w

D-L : 50*106mm


Installation Steps



Connect the wires to the track




Flip the 2 clamps on the lamp to a vertical position



Mount the light onto the track rail



Turn the two buckles in the direction of the opening



Connect the power supply and the product will light up

Technical Details

IP20 RoHS CB CE CRI≥80

30,000 Hrs | LM80 | B10

Basic Details

Wattage
10W | 15W | 20W

Luminous efficiency
90lm/W


CCT
3000K | 4000K | 6500K

Input Voltage
220-240V, 50/60Hz


Material
Aluminum

Body Finish
White | Black

Mounting Information



Light Distribution

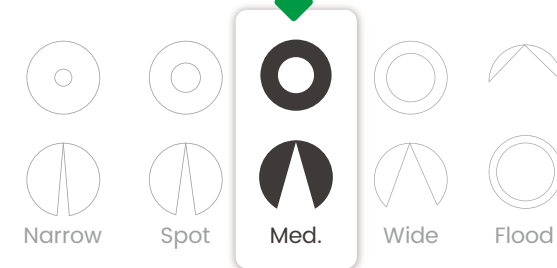

Multi-joint adjustment angle design



Led COB Down Light



Technical Details

IP44 RoHS CB CE CRI≥85 UGR<19

30,000 Hrs | LM80 | B10

Basic Details

Wattage
7W | 10W | 14W


CCT
3000K | 4000K | 6000K

Input Voltage
220-240V, 50/60Hz


Material
Aluminum

Body Finish
White | Black

Mounting Information



Light Distribution

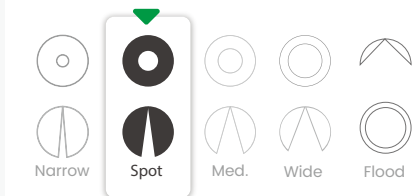


Product Description

LED COB downlights are modern, energy-efficient lighting solutions.

With a compact design, they offer precise, focused lighting for various spaces. Long-lasting and safe to use, they are a stylish and practical choice for modern interiors.

Dimension



Rated Power D-H (mm)	7W 66-65	Surface Cutout Ø55mm
Rated Power D-H (mm)	10W 85-75	Surface Cutout Ø75mm
Rated Power D-H (mm)	14W 110-90	Surface Cutout Ø95mm

7W Rated Power

Driver Details : 300mA Output Current | 36V Output Voltage

Lumen : 630lm
Efficacy : 90lm/W
CCT : 3000K

Lumen : 700lm
Efficacy : 100lm/W
CCT : 4000K

Lumen : 700lm
Efficacy : 100lm/W
CCT : 6000K

10W Rated Power

Driver Details : 300mA Output Current | 36V Output Voltage

Lumen : 900lm
Efficacy : 90lm/W
CCT : 3000K

Lumen : 1000lm
Efficacy : 100lm/W
CCT : 4000K

Lumen : 1000lm
Efficacy : 100lm/W
CCT : 6000K

14W Rated Power

Driver Details : 300mA Output Current | 36V Output Voltage

Lumen : 1260lm
Efficacy : 90lm/W
CCT : 3000K

Lumen : 1400lm
Efficacy : 100lm/W
CCT : 4000K

Lumen : 1400lm
Efficacy : 100lm/W
CCT : 6000K

Powered by



Power Supply




COB Die Casting Led Downlight



Product Description

The COB die casting LED downlight is a high-performance lighting solution that utilizes Chip-on-Board (COB) technology. This advanced technology integrates multiple LED chips onto a single board, resulting in a brighter and more uniform light output. The die casting construction of the downlight ensures excellent heat dissipation, enhancing its durability and lifespan. With its sleek design and superior lighting capabilities, the COB die casting LED downlight is an excellent choice for both home and commercial applications, providing bright and comfortable illumination while being energy-efficient and environmentally friendly.

Dimension



Rated Power	7W	Surface Cutout
L-H (mm)	90*42mm	Ø70mm
Rated Power	10W	Surface Cutout
L-H (mm)	120*42mm	Ø100mm
Rated Power	15W	Surface Cutout
L-H (mm)	165*53mm	Ø145mm
Rated Power	30W	Surface Cutout
L-H (mm)	223*57mm	Ø200mm


Aluminum Heatsink with Excellent Heat Dissipation

Die cast aluminum powder coated with choice of RAL colors.



Anti Glare Design

Low UGR and High Lumen Performance



Stable and High Lumen LED Chips

CR180 & CR190 chips with 10 year warranty



Customized LOGO Power Supply

3yrs warranty LED Power Supply with Customized LOGO



Technical Details

IP20

RoHS

CB

CE

CRI≥80

30,000 Hrs

LM80

B10

Basic Details

Wattage

7W | 10W | 15W | 30W

Luminous efficiency

90lm/W

CCT

3000K | 4000K | 6500K

Input Voltage

220-240V | 165-265V , 50/60Hz


Material

Die-cast aluminum


Body Finish

White

Light Distribution

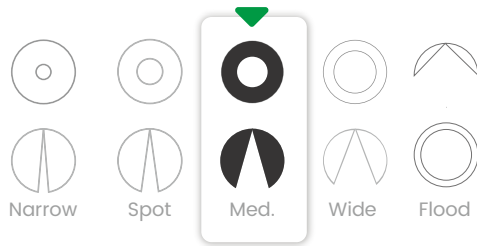


Mounting Information



Optional selection--CCT adjustable




LED Aluminum-Plastic Downlight

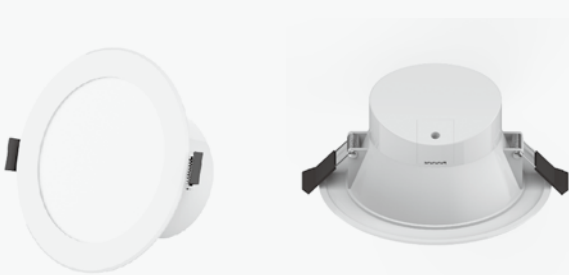

Product Description


The LED office pendant light offers a sleek and modern design, enhancing the brightness and aesthetics of any workspace. Its minimalistic style complements a range of décors, while its bright glow ensures desks and computers are well-lit. The LED technology ensures efficient energy usage and long-lasting performance. Easy to install and maintain, this pendant light is a simple yet powerful addition to modern offices.

Dimension

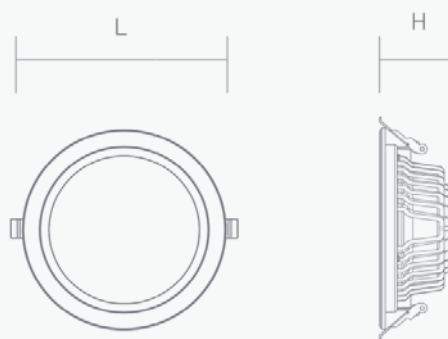

Rated Powe: 9W W-H: Φ92*55mm Surface Cutout: Φ70mm	Rated Powe: 12W W-H: Φ115*60mm Surface Cutout: Φ90mm
Rated Powe: 15W W-H : Φ140*65mm Surface Cutout: Φ110mm	Rated Powe: 18W W-H : Φ170*65mm Surface Cutout: Φ140mm
Rated Powe: 24W W-H : Φ190*70mm Surface Cutout: Φ150mm	Rated Powe: 36W W-H: Φ235*90mm Surface Cutout: Φ200mm

Installation Steps

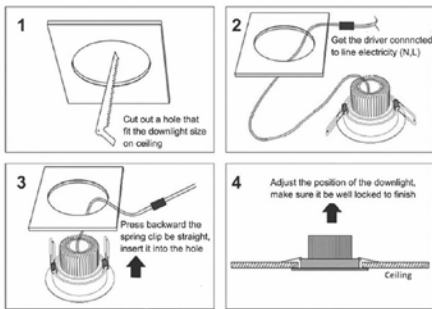

Technical Details

IP20

RoHS

CB

CE

CRI≥80

30,000 Hrs

LM80

B10

Basic Details

Wattage

7W | 12W | 15W | 18W | 20W | 24W

Luminous efficiency

90lm/W

CCT

3000K | 4000K | 6500K

Input Voltage

220-240V | 165-265V, 50/60Hz


Material

Plastic+Aluminium

Mounting Information



Light Distribution

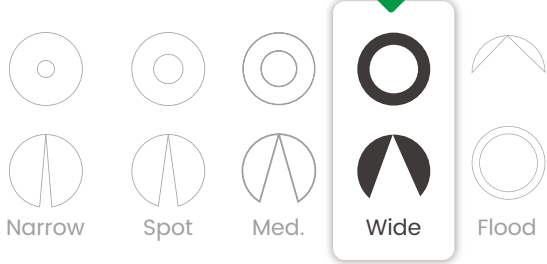

Optional selection--DIP CCT






Product Description

The LED office pendant light offers a sleek and modern design, enhancing the brightness and aesthetics of any workspace. Its minimalistic style complements a range of décors, while its bright glow ensures desks and computers are well-lit. The LED technology ensures efficient energy usage and long-lasting performance. Easy to install and maintain, this pendant light is a simple yet powerful addition to modern offices.

Dimension



Rated Power	9W	Surface Cutout
L-H (mm)	Ø100*44mm	Ø75-90mm
Rated Power	12W	Surface Cutout
L-H (mm)	Ø120*44mm	Ø90-110mm
Rated Power	15W	Surface Cutout
L-H (mm)	Ø150*45mm	Ø120-140mm
Rated Power	18W	Surface Cutout
L-H (mm)	Ø175*45mm	Ø140-165mm
Rated Power	24W	Surface Cutout
L-H (mm)	Ø197*51mm	Ø160-185mm
Rated Power	36W	Surface Cutout
L-H (mm)	Ø230*55mm	Ø190-220mm

Aluminum Heatsink with Excellent Heat Dissipation

Die cast aluminum powder coated with choice of RAL colors.



Anti Glare Design

Low UGR and High Lumen Performance



Stable and High Lumen LED Chips

CRI80 & CRI90 chips with 10 year warranty



Customized LOGO Power Supply

3yrs warranty LED Power Supply with Customized LOGO



Led Die-casting Down Light

Technical Details


IP20	RoHS	CB	CE	CRI≥80
30,000 Hrs	LM80	B10		

Basic Details

Wattage	9W 12W 15W 18W 24W 36W
Luminous efficiency	90lm/W
CCT	3000K 4000K 6500K
Input Voltage	220-240V 165-265V , 50/60Hz
Material	Die-cast aluminum
Body Finish	



Light Distribution

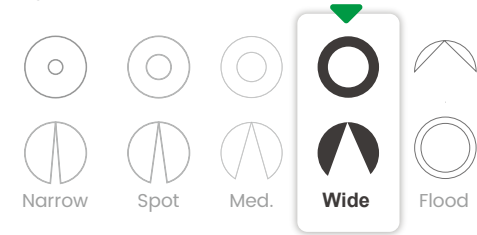

Mounting Information



Optional selection--CCT adjustable



Led Down Light Frame

Frame+Lamp=Downlight




Dimension

Size	Surface Cutout
B1 102*102*45mm	90*90mm
Size	Surface Cutout
B2 102*180*45mm	90*165mm
Size	Surface Cutout
B3 102*270*45mm	90*255mm

Material

PC+PC
PC+PC
PC+PC




Dimension

Size	Surface Cutout
D1 81*81*54mm	Ø75mm

Material

Die-Casting AL+PC



Dimension

Size	Surface Cutout
F1 92*92*25mm	75*75mm
Size	Surface Cutout
F2 92*173*25mm	150*75mm
Size	Surface Cutout
F3 92*249*25mm	230*75mm

Material


PC+PC
PC+PC
PC+PC

Dimension

Size	Surface Cutout
A1 90*90mm	75*75mm
Size	Surface Cutout
A2 170*90mm	155*75mm
Size	Surface Cutout
A3 250*90mm	235*75mm

Material

PC+PC/Die-Casting AL+PC
PC+PC/Die-Casting AL+PC
PC+PC/Die-Casting AL+PC




Dimension

Size	Surface Cutout
C1 85*30mm	Ø75mm

Material

Die-Casting AL+PC



Dimension

Size	Surface Cutout
E1 88*40mm	Ø78mm

Material

Die-Casting AL+PC

LED Downlight (MR16 GU10 Module)



Product Description

This lighting frame is designed for easy installation and flexibility, compatible with GU10, MR16 bulbs, and LED modules. Its simple structure allows quick assembly and hassle-free replacement, making it ideal for versatile lighting setups.

✓Compatibility: Works with GU10, MR16, and LED modules.

✓User-Friendly: Easy to assemble and replace components.

✓Versatile: Suitable for various lighting configurations.

Dimension



Size: 90*90mm
Surface Cutout: 75*75mm




Size: 170*90mm
Surface Cutout: 155*75mm




Size: 250*90mm
Surface Cutout: 235*75mm

Installation Steps

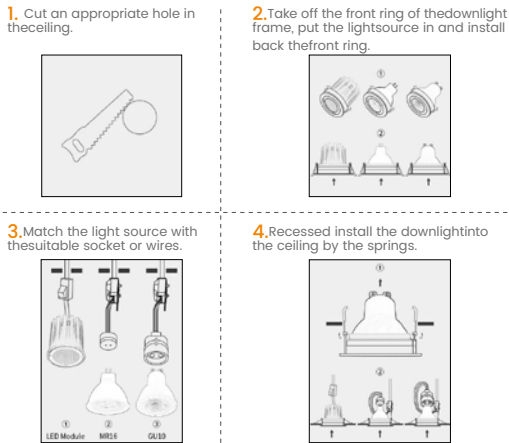


Technical Details




Basic Details



Mounting Information



Light Distribution

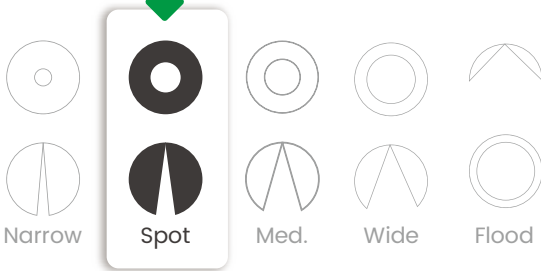


Recessed Led Linear Light



Product Description


Our Recessed linear LED lighting fixture is a sleek and modern solution for any interior. Its minimalist design, featuring a pristine white light strip and silver brackets, seamlessly blends into any decor. The energy-efficient LEDs provide ample light while reducing energy consumption. Perfect for highlighting architectural details or everyday tasks, this fixture is a stylish and practical addition to any space.

Dimension

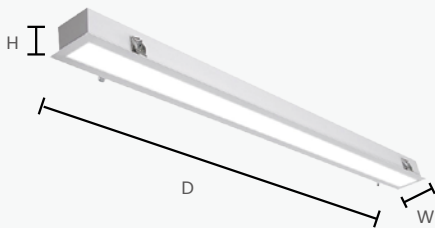

Rated Power	20W	Surface Cutout
D-W-H (mm)	1210*70*60	Ø1195*55mm
Rated Power	24W	Surface Cutout
D-W-H (mm)	1210*80*60	Ø1195*65mm
Rated Power	30W	Surface Cutout
D-W-H (mm)	1210*90*60	Ø1195*75mm
Rated Power	36W	Surface Cutout
D-W-H (mm)	1210*100*60	Ø1195*85mm
Rated Power	40W	Surface Cutout
D-W-H (mm)	1210*120*60	Ø1195*105mm


INSTALLATION STEPS

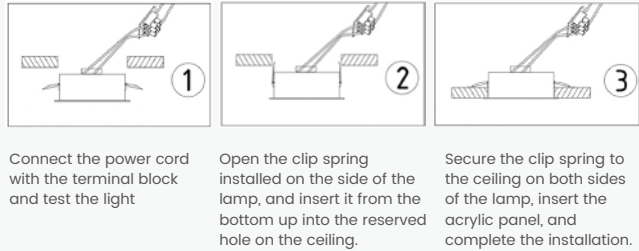


Technical Details





Basic Details

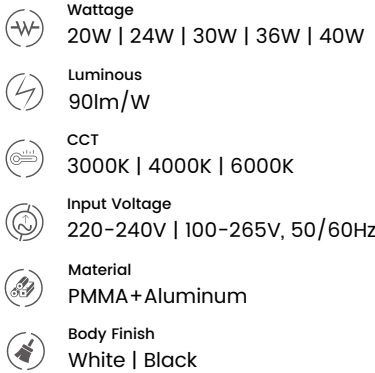

Mounting Information



Light Distribution

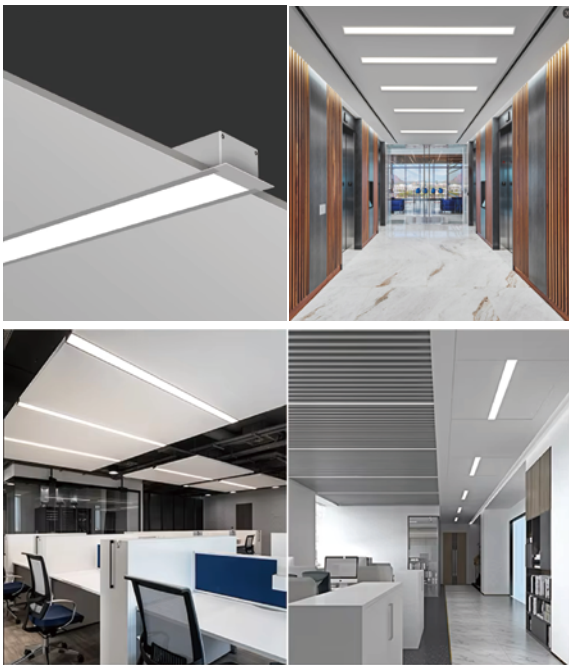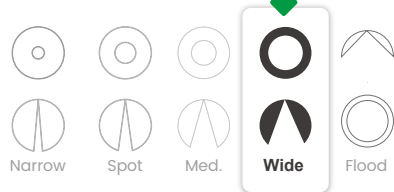

Led Linear Pendant Light



Product Description

The LED office pendant light offers a sleek and modern design, enhancing the brightness and aesthetics of any workspace. Its minimalistic style complements a range of décors, while its bright glow ensures desks and computers are well-lit. The LED technology ensures efficient energy usage and long-lasting performance. Easy to install and maintain, this pendant light is a simple yet powerful addition to modern offices.

Dimension




Technical Details

IP20 RoHS CB CE CRI≥80


Basic Details

- Wattage
20W | 32W | 42W | 45W | 56W
- Luminous efficiency
120lm/W
- CCT
3000K | 4000K | 5000K | 6500K
- Input Voltage
100-265V | 220-240V , 50/60Hz
- Material
PC
- Body Finish
White | Black

Mounting Information



Light Distribution

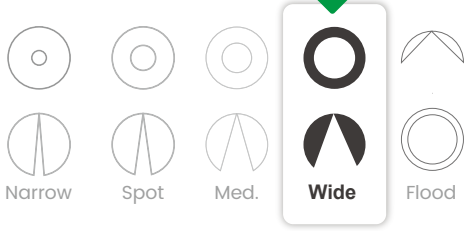

FAN LIGHT

Aladdin founded in1995



E27 Holder Fan Light



Product Description

This modern ceiling fan light, equipped with an E27 lamp holder, offers style and versatility. The E27 holder's compatibility allows for a wide range of bulb options, meeting diverse lighting needs. Its sleek white design creates an elegant look, perfect for any indoor space.


Dimension




Kind of mounting



Technical Details



Basic Details

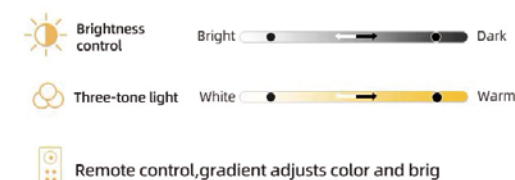

Bladeless Turbo Fan Light


NEW



Product Description

This modern ceiling fan light combines elegance and versatility. It features a sleek design with built-in fan, concealed for a clean look. A soft nightlight at the back provides a cozy glow, while advanced technology purifies the air, creating a healthy indoor environment.


Product Dimension

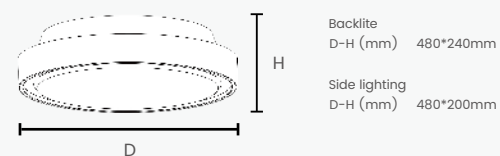


Night light




Intelligent remote control(2.4G)

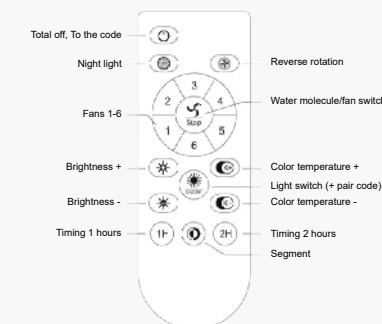


INSTALLATION PROCEDURE

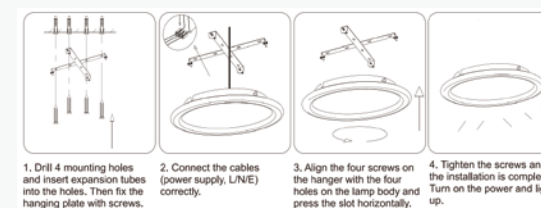

Technical Details



Basic Details

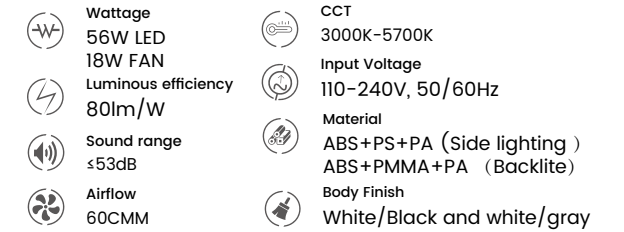

Mounting Information




Light Distribution




Optional selection--Nano sterilization fan lamp



Optional selection--TUYA APP

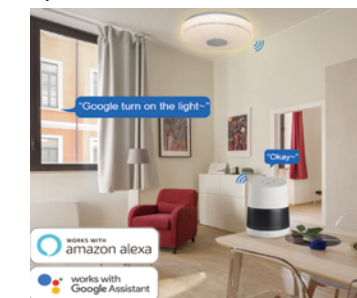

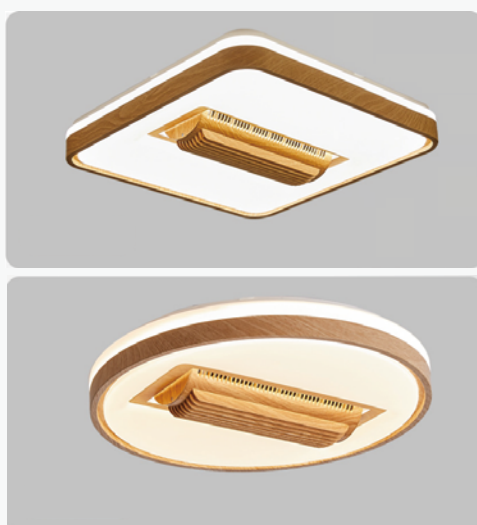

NEW

Technical Details

IP20 RoHS CB CE CRI≥80

30,000 Hrs | LM80 | B10

Basic Details

- Wattage: 60W LED, 25W FAN
- Luminous efficiency: 80lm/W
- Sound range: ≤53dB
- Airflow: 100CMM
- CCT: 3000K-5700K
- Input Voltage: 110-240V, 50/60Hz
- Material: ABS+Acrylic
- Body Finish: Natural wood color

Mounting Information




Light Distribution



Details---Around 120° to distribute airflow



Optional selection--TUYA APP

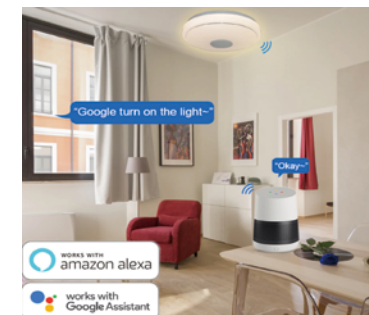


More Style Display



B003



B004

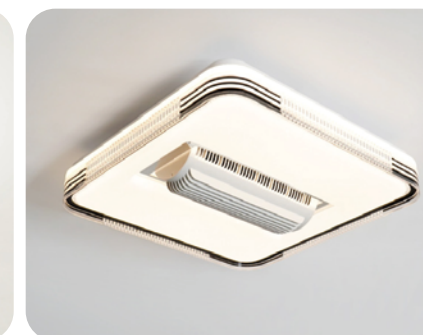

B005




B006



B007




B008

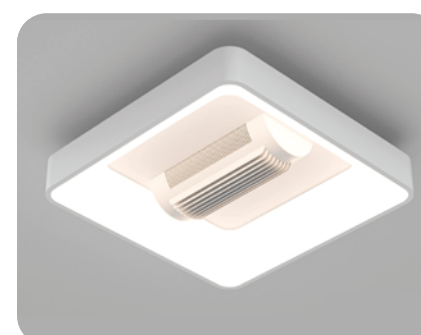

B009



B010

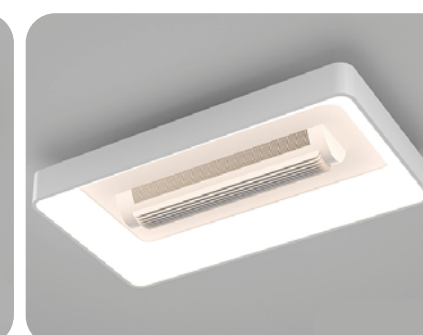

B011



B012



B013



B014



B015



B016




B017


Product Description

The fan-light fixture boasts a modern design with a unique feature: its ability to rotate the airflow up to 120° for customized comfort. Constructed from high-quality materials, it offers both style and functionality, perfect for any contemporary home. With convenient control options, adjusting airflow direction is easy and effortless.


Product Dimension

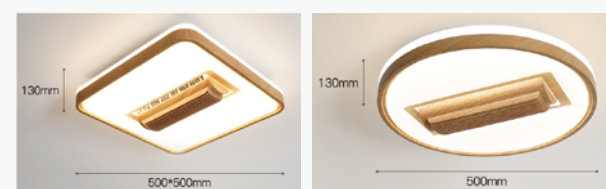

Intelligent remote control(2.4G)

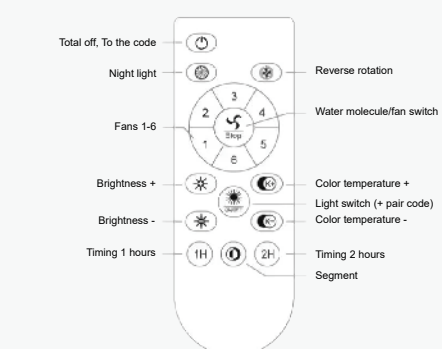

INSTALLATION PROCEDURE

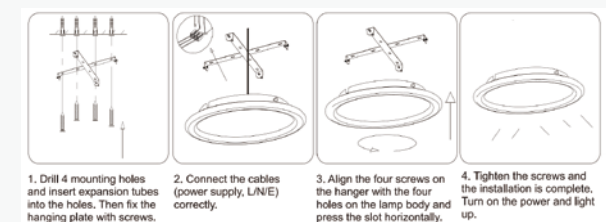

Bedroom Ceiling Fan Light




Product Description

Ceiling fan lights are a multi-functional addition to any indoor space, combining the utility of a ceiling fan with the illumination of a lighting fixture. Featuring a white circular light shade and matching fan blades, these fan lights come in various styles to complement any interior design. The wood-toned top model offers a classic elegance, while the white and gold options provide a sleek and modern touch. Installed on a gray ceiling backdrop, these fan lights not only circulate air efficiently but also provide sufficient lighting, creating a comfortable and inviting atmosphere in your home.

Dimension



INSTALLATION PROCEDURE

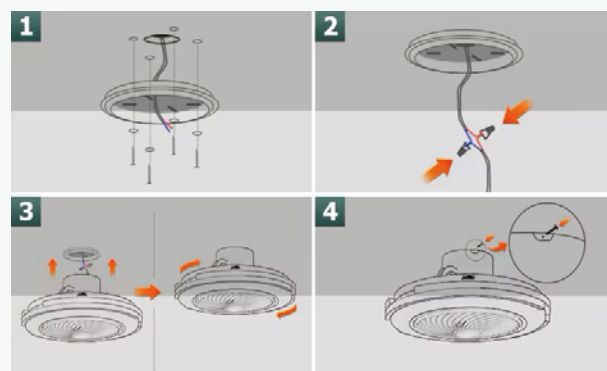

Technical Details

IP20 RoHS CB CE CRI≥80

30,000 Hrs | LM80 | B10

Basic Details


- Wattage: 15W LED
- Luminous: 90lm/W
- CCT: 3000K | 4000K | 6500K
- Input Voltage: 110-240V, 50/60Hz
- Material: Wood+Acrylic+PP Fan+All Copper Motor

6 speeds adjustment

6 variable fan speeds insure you find just the right comfort level



STEPLESS ADJUSTABLE BRIGHTNESS

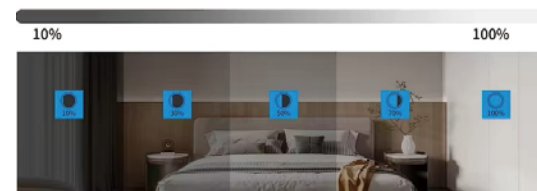

ADJUSTABLE COLOR TEMPERATURE



More Style Display



FSD-8088

DC 42 inch ABS LED



FSD-3888

DC 22 inch ABS LED



FSD-2116

DC 42 inch ABS LED



FSD-2107

DC 42 inch ABS LED



FSD-3862

DC 42 inch ABS LED



FSD-3850

DC 42 inch ABS LED



FSD-3208

DC 42 inch ABS LED



FSD-4088

DC 20 inch ABS LED



FSD-20K005

DC 20 inch ABS LED



FSD-20K035

DC 20 inch ABS LED



FSD-20K026

DC 20 inch ABS LED



FSD-20K031

DC 20 inch ABS LED

Straight-blade Ceiling Fan Light




Product Description

The contemporary ceiling fan boasts a sleek and sophisticated design. Composed of three-shaped wooden blades in a light brown hue, it contrasts beautifully with the white fan base. At the center, a round light fixture emits a soft and gentle glow, adding a cozy ambiance to any space. A distinguishing feature of this fan-cum-light is its ability to be controlled by a remote control, which offers 6-speed settings for precise airflow regulation. Moreover, the light fixture offers a unique triple-color feature, allowing users to switch between three different color temperatures to suit their mood or occasion.

Dimension



Multiple mounting options

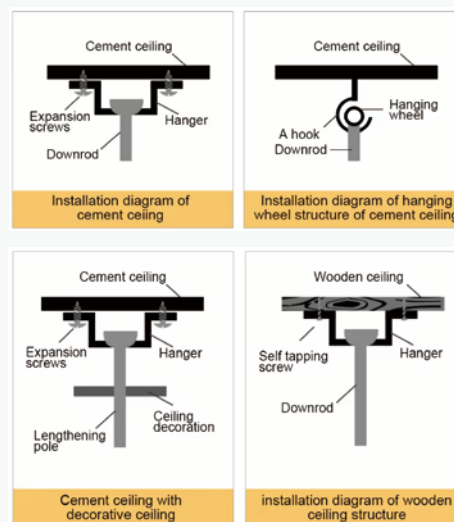

Technical Details

IP20 RoHS CB CE CRI≥80

30,000 Hrs | LM80 | B10

Basic Details

- Wattage: 20W LED
- Luminous: 90lm/W
- CCT: 3000K | 4000K | 6500K
- Input Voltage: 110-240V, 50/60Hz
- Material: Iron + Solid Wood
- Body Finish: White | Black | Coffee | Brushed nickel | Antique brass




6 speeds adjustment




6 variable fan speeds insure you find just the right comfort level



Color Temperature Selection

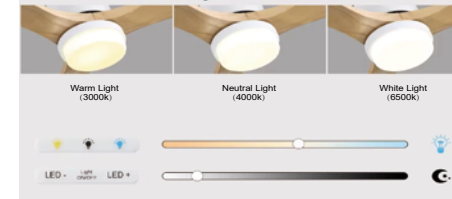

More Style Display

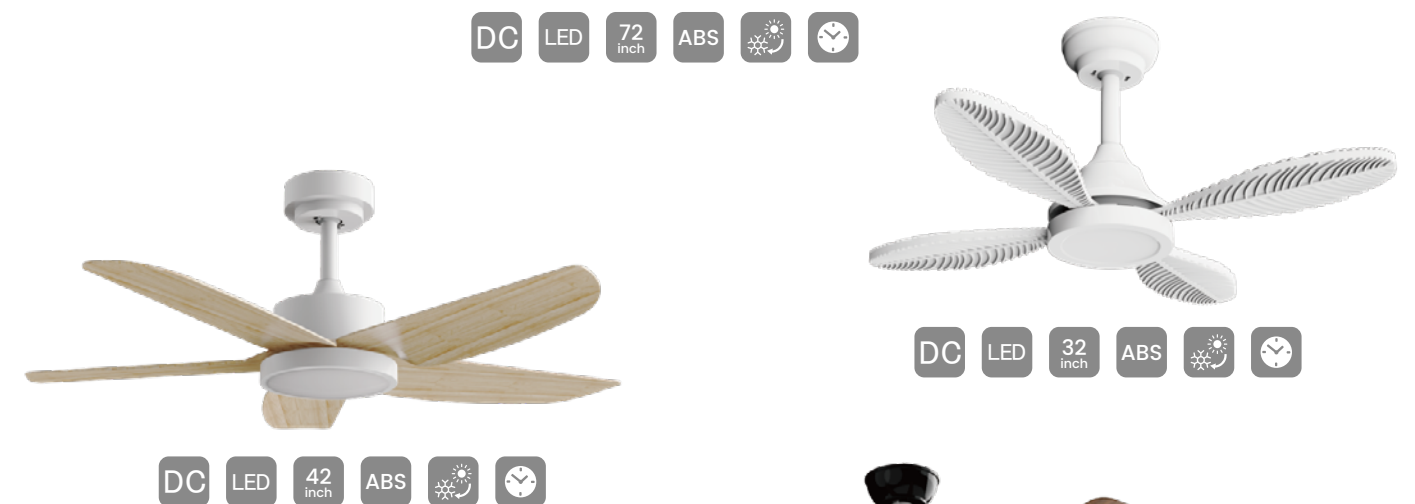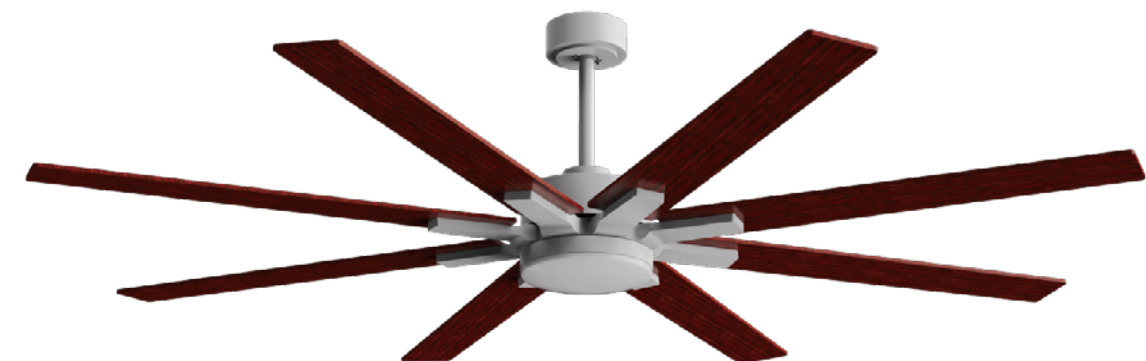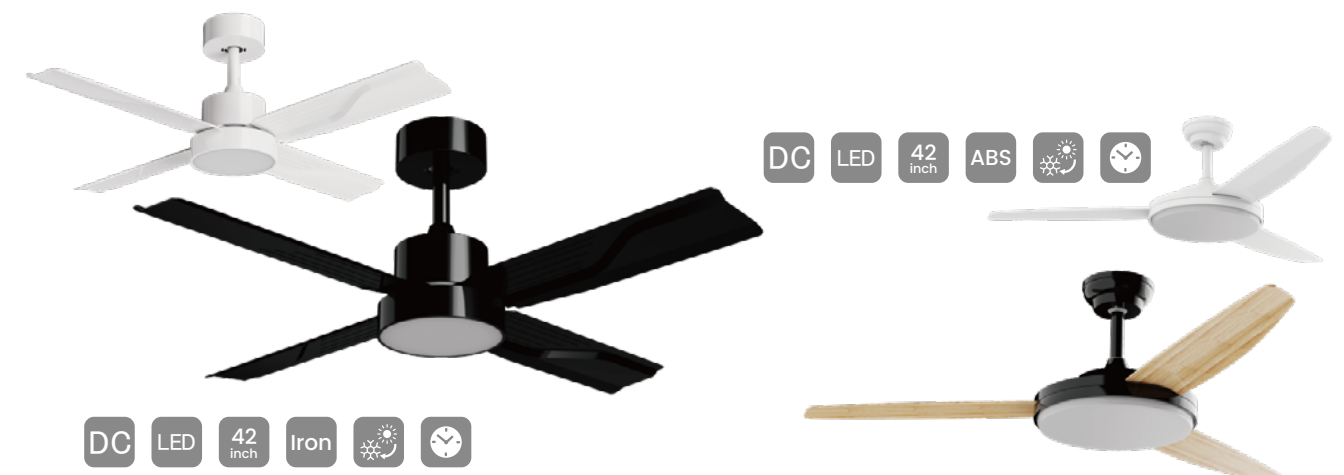

CREATIVE PRODUCT

Aladdin founded in1995

Power Cube Socket



Product Description

The PowerCube is an innovative and sleek power strip designed by DesignNest. Its compact cube shape seamlessly blends functionality with modern aesthetics. At the top, it boasts a standard wall socket, accommodating a wide range of appliances. On one side, two USB ports are thoughtfully positioned, enabling you to charge multiple devices simultaneously with ease. Crafted from high-quality materials, the PowerCube ensures durability and reliability, making it a versatile choice for both indoor and outdoor settings. Its compact design also allows for convenient portability, fitting neatly into luggage or bags, ideal for travelers. More than just a practical solution, the PowerCube adds a touch of sophistication to any space, enhancing both functionality and style.

Dimension

	5*Sockets		5*Sockets 1.5m cable
	4*Sockets 2*USB-A		4*Sockets 2*USB-A 1.5m cable
	4*Sockets 1*USB-A 1*type-C		4*Sockets 1*USB-A 1*type-C 1.5m cable
	4*Sockets 2*type-C		4*Sockets 2*type-C 1.5m cable
	4*Sockets 2*USB-A 1*type-C		4*Sockets 2*USB-A 1*type-C 1.5m cable
	4*Sockets 1*USB-A 2*type-C		4*Sockets 1*USB-A 2*type-C 1.5m cable
	4*Sockets 3*USB-A		4*Sockets 3*USB-A 1.5m cable
	NEW 4*Sockets 2*USB-A 1*type-C 1*Switch		NEW 4*Sockets 1*USB-A 2*type-C 1*Switch 1.5m cable

Basic Details



Input

250V 16A Max



AC Output

MAX3680W

DC Output

10W	A+A	MAX2.1A/5V
20W	A+C	10W=A1+C1:5V2.1A 20W=A1:5V3A,9V2A,12V1.5A 20w=C1:5V3A,9V2.22A,12V1.67A
20W	2*A+C	10W=A1+A2+C1:5V2.1A 20W=A1/A2:5V3A,9V2A,12V1.5A 20w=C1:5V3A,9V2.22A,12V1.67A
20W	A+2*C	10W=A1+C1+C2:5V2.1A 20W=A1:5V3A,9V2A,12V1.5A 20w=C1/C2:5V3A,9V2.22A,12V1.67A
20W	3*A	15W=A1+A2+A3:5V3A 20W=A1/A2/A3:5V3A,9V2A,12V1.5A
35W	C+C	15W=C1+C2:5V3.1A 35W=C1/C2:5V3A,9V3A,12V2.91A,15V2.33A,20V1.75A
45W	2*C+A	45W=USB-C1:5V3A,9V3A,12V3A,15V3A,20V2.25A 45W=USB-C2:5V3A,9V3A,12V3A,15V3A,20V2.25A 27W=USB-A1:5V3A,9V3A,12V2.25A,15V1.8A,20V1.35A


 Wire size
3x1.0mm² & 1.5m

 Material
Plastic & copper

 Body Finish
Black | Green | Blue | Red



 Country
Germany | Fance | Britain | China
(Sockets for other markets are being developed successively.)

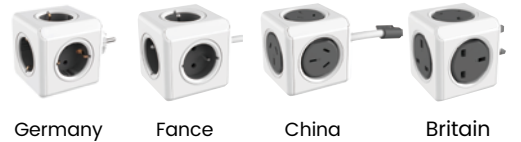

Optional selection-Cube wireless charging socket

- 1.Little occupy space.
- 2.Safe with six multi-protections.
- 3.Fast charging 5V-4A/5V-2.1A.
- 4.Environmental protection material.



Power Cooker



Handle with integrated touch control

The handle has an integrated touch control panel making it convenient to operate. After powering it, the display lights up to show the different cooking options, and adjust the cooking modes.



Easy to clean, with removable parts

While most electric cookers are bulky and heavy, the PowerCooker is lightweight. The parts are easy to disassemble for cleaning purpose.



Detachable heating base for cord-free use

Once the meal is cooked you can remove the cooker from the heating base to bring it to the dining table.



Prepare a variety of meals

You can prepare almost everything in the PowerCooker: Rice, soup, steamed vegetables, a cake or even your own yogurt. Each cooking mode has its preset cooking time for your convenience.



Weighted lid for sealed pressure cooker effect

Cook faster and more convenient with PowerCooker. The higher the temperature, the more steam forms in the pot allowing the food to cook faster. Its vent on the lid will release steam to prevent scalding marks inside the pot.



Simple and compact

With its no-frills design, this cooker fits into any kitchen interior



Audio Cube



A surround sound experience

Most speakers are unidirectional, meaning the best sound is only directly in front of the device. Because the audioCube uses omnidirectional speakers, the sound penetrates air space, without any dead spots. We created a 360° audio experience, where the sound interacts with the room. The audioCube is the best portable Bluetooth speaker for your home, it is the perfect centerpiece for any gathering.



Bass

The audioCube has incredible bass, especially for its size. This is further amplified by a vibrating plane, which also doubles as an on/off switch. There is also an integrated LED so you can easily see whether the product is on or off.

No external adapter required

The audioCube also offers an integrated power circuit, meaning that no bulky external power adapter is required, making it easy to place and charge anywhere.



Controls

The audioCube features clearly indicated buttons, where you can access all basic controls (pause/play, volume, previous/next song and scan for pairing) with a single touch and all controls have clear audio feedback. If you want to control from a distance the audioCube features Bluetooth connectivity to make it easy.


Heng Balance Lamp



Product Description

Heng Balance Lamp has warm and subtle LED light on the inner side of the beech wood frame. It has a unique magnetic switch. Bring the lower wooden sphere to the center and it attracts the upper sphere, switching the light on. Mysterious lights and drop shadows are created with the light coming from all directions pointed at the center, illuminating the thin threads and the floating spheres. The balancing spheres exude a calming feeling and composition.

Dimension

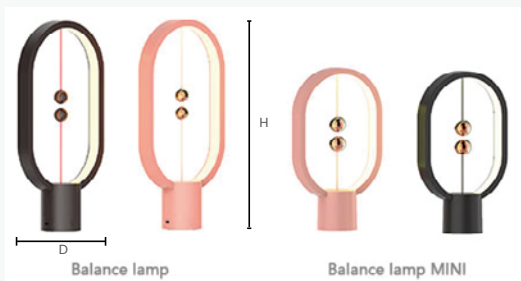


Rated Power	5W	Rated Power	5W
D-H (mm)	180*350	D-H (mm)	140*240


Optional selection--Color




Technical Details



Basic Details

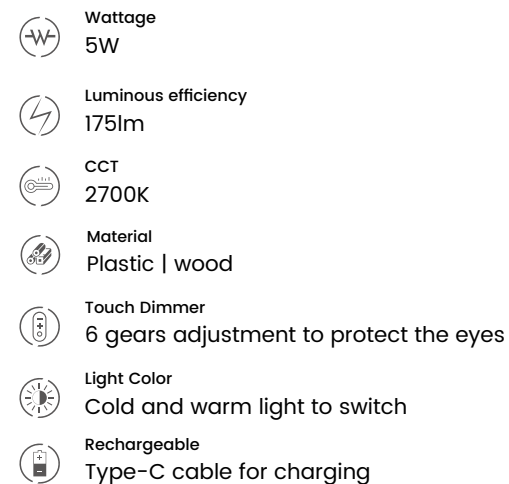

Light Distribution

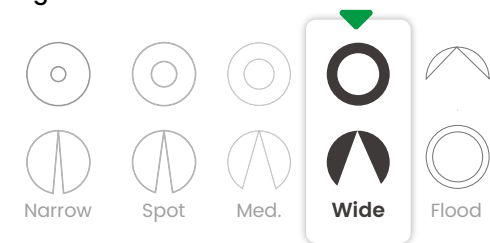

Function Upgrade

About Switch:
Optimize switches to reduce miss-operations. When the two balls attract each other, the light will be lit. When you put down the ball, the light will be turned off.


About Light:
Use durable LED lamp beads, soft light improve glare and flare problem. Soft light protects eyes, dual color temperature adjustment. Light up the dark night!



About Touch dimmer:
Touch dimmer on the side "o + -" "o" for switching Cold and Warm light. "+" "-" (6-level dimming) for adjusting light brightness.

About Battery:
1500mAh battery, 4~6 hours of lighting. The lamp needs to be charged when the red light flashes. Plug in the power supply, it is charging when the red light is not flashing. When the battery is fully charged the indicator is white.

More Trendy New Products

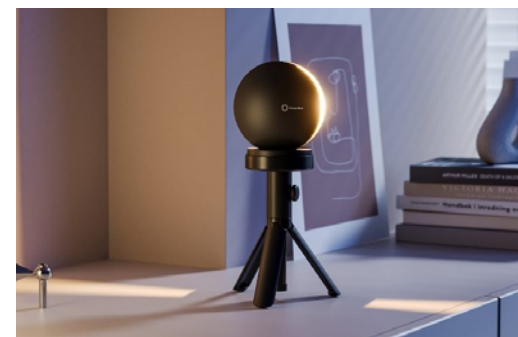

Ambient Light Beam Corridor




Goggle Lamp Mr Watt



Light Shade Tulip Standing Floor Lamp



Electric Flameless Candles

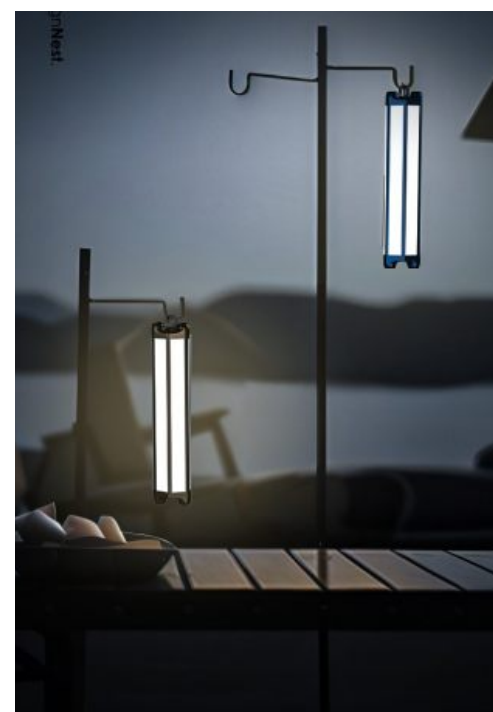

Light Bar Solar



Power Light Box



Audio Ball Light Portable Outdoor



Light Cube



Outdoor Camping Light Modular

Power Cooker Glass



Vapor Smoke Bomb



Levitating Lamp



Audio Responsive Lamp

SPECIAL LIGHTING

Aladdin founded in 1995

Reptile Lighting Daytime Series



FEATURE AND BENEFIT
-Provide both UVB and UVA,high quality visual light and heat
-Simulate the sun providing the light radiation necessary for reptiles to survive
-UVA provides the warmth which cold-blooded animals are used to in nature
-UVB promotes production of Vitamin D3 helping calcium absorption for reptile
-Self-ballasted mercury vapor lamp without additional ballast

PRODUCT SIZE

SPECIFICATION	H(MM)	D(MM)
80W/100W	120	80
120W	130	85
160W	150	115



FEATURE AND BENEFIT
-Uniform daytime spectrum out put
-Provide UVA which can promote normal activities of reptiles
-The soft light is not harsh
-Increase the temperature in the terrarium suitable to daytime use
-High CRI is good for observing the reptiles' activities

PRODUCT SIZE

SPECIFICATION	H(MM)	D(MM)
30W/50W/75W	103	63
100W	110	80
150W	130	95



FEATURE AND BENEFIT
-Simulate the natural moonlight which let reptiles feel right
-Providing a daily routine is conducive to the healthy growth of reptiles
-The best selection of induce night activities of reptiles
-It's without UVA that can let reptiles have a good rest
-It can produce heat to warm reptiles at night

PRODUCT SIZE

SPECIFICATION	H(MM)	D(MM)
30W/50W/75W	103	63
100W	110	80
150W	130	95



FEATURE AND BENEFIT
-A variety of different transmittance(UVB2.0, 5.0, 10.0, 15.0) are available
-Provide both UVB and UVA_A and high quality visual light
-Simulate the sun providing the light radiation necessary for reptiles to survive
-Full spectrum promotes the growth of plants
-Can be switched on and off instantly

PRODUCT SIZE

SPECIFICATION	H(MM)	D(MM)
120W	120	85
200W	147	94



FEATURE AND BENEFIT
-Encourage the mating behavior during the mating season of adult reptiles
-Improve the temperature on the reptile skin and also under the surface
-Infrared ray can improve the reptile's appetite and accelerate the rehabilitation of injuries
-Infrared ray can dilate the reptile's blood vessels and improve blood circulation
-The best selection of a heat source for observing nocturnal reptiles

PRODUCT SIZE

SPECIFICATION	H(MM)	D(MM)
30W/50W/75W	103	63
100W	110	80
150W	130	95



FEATURE AND BENEFIT
-Long tube shape makes for the equal distribution of light and soft light
-A variety of different transmittance(UVB2.0, 5.0, 10.0, 15.0) are available
-Provide both UVB and UVA_A and high quality visual light
-Simulate the sun providing the light radiation necessary for reptiles to survive
-Full spectrum promotes the growth of plants
-Can be switched on and off instantly

PRODUCT SIZE

SPECIFICATION	H(MM)	D(MM)
10W	345	26
15W	451	26
25W	754	26
30W	908	26
38W	1213	26

Fishing Light

BT SHAPE ON-WATER MH FISHING LAMP

ON-WATER QUARTZ MH FISHING LAMP

TUNGSTEN FISHING LAMP

UNDER-WATER QUARTZ MH FISHING LAMP



Description	Wattage(W)	Base	Operating Voltage(V)	Operating Current(A)	Luminous Flux(lm)	Diameter(mm)	Max. Length(mm)	CCT(K)	Avg.Life(h)
BT180 MH1000W	1000	E39/E40	270	4.2	135000	180	395	2600-10000K GREEN/BLUE/PINK	12000
BT180 MH1500W	1500	E39/E40	260	6.5	202500	180	395	2600-10000K GREEN/BLUE/PINK	12000
BT180 MH2000W	2000	E39/E40	230	8.5	250000	200	495	2600-10000K GREEN/BLUE/PINK	12000
TT90 MH2000W-Q	2000	E39/E40	240	9.1	240000	90	475	2600-10000K GREEN/BLUE/PINK	2000
BT120 MH2000W-Q	2000	E39/E40	240	9.1	240000	120	485	2600-10000K GREEN/BLUE/PINK	2000
TT110 MH3000W-Q	3000	E39/E40	250	13	380000	110	540	2600-10000K GREEN/BLUE/PINK	2000
BT180 MH3000W-Q	3000	E39/E40	250	13	380000	180	550	2600-10000K GREEN/BLUE/PINK	2000
TT110 MH4000W-Q	4000	E39/E40	245	17.5	500000	110	540	2600-10000K GREEN/BLUE/PINK	2000
BT180 MH4000W-Q	4000	E39/E40	245	17.5	500000	180	550	2600-10000K GREEN/BLUE/PINK	2000
BT180 ML1000W	1000	E39/E40	220	4.5	30000	180	395	4500	3000
G130 TW1000W	1000	E39/E40	110/220	9.1/4.5	14000	130	235	2800	1000
RE-R160 TW500W-RED	500	E39/E40	110/220	9.1/4.5	4000	160	240	RED	1000
RE-R160 TW500W	500	E39/E40	110/220	4.5/2.3	7000	160	240	2800	1000
RE-R180 TW1000W	1000	E39/E40	110/220	9.1/4.5	14000	180	300	2800	1000
TT65 MH2000W-Q	2000	E39/E40	240	9.1	24000	65	365	2600-10000K	2000
TT70 MH3000W-Q	3000	E39/E40	250	13	38000	70	45	2600-10000K	2000
TT80 MH4000W-Q	4000	E39/E40	240	17.5	50000	80	480	2600-10000K	2000

Product Description

Super high output lamp technology
Superb color temperature and luminance preservation
Magnificent penetration into the deep sea
Maximum luminous efficiency by minimizing electricity loss
Any color temperature including green/blue/pink can be customized

MAGNETIC BALLAST FOR FISHING LAMP 1000-4000W



SINGLE ENDED METAL HALIDE LAMP



SINGLE ENDED CERAMIC METAL HALIDE LAMP



DOUBLE ENDED METAL HALIDE LAMP



DOUBLE ENDED CERAMIC METAL HALIDE LAMP




Description	Wattage(W)	Base	Operating Voltage(V)	Operating Current(A)	Luminous Flux(lm)	Diameter(mm)	Max. Length(mm)	CCT(K)	PPF(mol/m)	Avg.Life(h)
T46 MH250W	250	E39/E40	130	2.15	20000	46	255	4000K/6000K/10000K	275	10000
T46 MH400W	400	E39/E40	130	3.25	34000	46	290	4000K/6000K/10000K	480	10000
T046 MH600W	600	E39/E40	110	6.2	52000	63.5	290	4000K/6000K/10000K	720	10000
TT76 MH600W	600	E39/E40	110	6.2	52000	76	290	4000K/6000K/10000K	720	10000
TT76 MH1000W	1000	E39/E40	250	4.5	90000	76	335	4000K/6000K/10000K	1300	10000
CMH315W PGZX18	315	PGZX18	100	3.2	34000	38.5	193	3000K/4000K	600	15000
T52 CMH315W	315	E39/E40	100	3.2	34000	52	280	3000K/4000K	600	15000
T52 CMH600W	600	E39/E40	125	6	60000	52	280	3000K/4000K	1150	15000
DE MH600W	600	wire	110	6.2	52500	32.5	390	4000K/6000K/10000K	750	10000
DE MH750W	750	wire	200	3.8	64000	32.5	390	4000K/6000K/10000K	930	10000
DE MH1000W	1000	wire	250	4.5	90000	32.5	390	4000K/6000K/10000K	1300	10000
DE CMH630W	630	wire	210	3.2	68000	32.5	395	3000K/4000K	1350	15000
DE CMH945W	945	wire	270	4	104000	32.5	395	3000K/4000K	2050	15000
DE MH1000W	1000	wire	230	4.8	115000	32.5	395	3000K/4000K	2150	15000

Product Description

Super high output lamp technology
Optimized spectrum, distribution pattern, lumen output, and irradiance
Reliable operation throughout the growth cycle
Engineered in ISO certified facility
Richest spectrum closest to sunlight on the market
Offers significant improvement in spectral quality over standard MH
Tubular low profile design for compact fixtures

MAGNETIC BALLAST FOR PLANT GROWTH LAMP

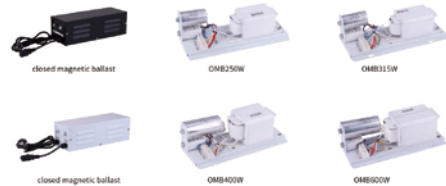

SINGLE ENDED HIGH PRESSURE SODIUM LAMP



DOUBLE ENDED HIGH PRESSURE SODIUM LAMP



DOUBLE ENDED HIGH PRESSURE SODIUM LAMP





Description	Wattage(W)	Base	Operating Voltage(V)	Operating Current(A)	Luminous Flux(lm)	Diameter(mm)	Max. Length(mm)	CCT(K)	PPF(mol/m)	Avg.Life(h)
T46 HPS250W	250	E39/E40	105	3	30000	46	255	2100K	430	24000
T46 HPS400W	400	E39/E40	110	4.2	55000	46	290	2100K	650	24000
T46 HPS600W-L	600	E39/E40	110	6.2	90000	46	290	2100K	1000	24000
T46 HPS600W-H	600	E39/E40	190	3.5	90000	46	290	2100K	1050	24000
T65 HPS1000W-L	1000	E39/E40	115	8.5	145000	65	383	2100K	2000	24000
ET25 HPS1000W-H	1000	E39/E40	250	4.5	148000	78	383	2100K	2050	24000
DE HPS600W-L	600	wire	110	6.2	90000	32.5	390	2100K	1000	24000
DE HPS600W-H	600	wire	190	3.5	90000	32.5	390	2100K	1050	24000
DE HPS750W	750	wire	200	3.8	113000	32.5	390	2100K	1050	24000
DE HPS1000W	1000	wire	210	5	150000	32.5	390	2100K	2100	24000
RE-ED90 HPS250W	250	revolving E40	105	3	255000	90	245	2100K	370	24000
RE-ED120 HPS400W	400	revolving E40	110	4.2	470000	120	315	2100K	560	24000
RE-ED140 HPS600W	600	revolving E40	190	3.5	770000	140	345	2100K	1000	24000
RE-TR120 HPS600W-AI	600	revolving E40	190	3.5	780000	120	345	2100K	1050	24000
RE-TR120 HPS600W-Ag	600	revolving E40	190	3.5	860000	120	345	2100K	1150	24000

Product Description

Super high output lamp technology
Optimized spectrum, distribution pattern, lumen output and irradiance
Reliable operation throughout the growth cycle
Highest quality and consistent performance
Engineered in ISO certified facility
High red and blue spectral ratios for good photosynthesis efficiency
Great lumen output for high PAR values
Robust plants through high blue light output
High red light ratio for healthy plant growth
Economic (long average life, high lumen output, low energy consumption)
Tubular low profile design for compact fixtures

MAGNETIC BALLAST FOR PLANT GROWTH LAMP

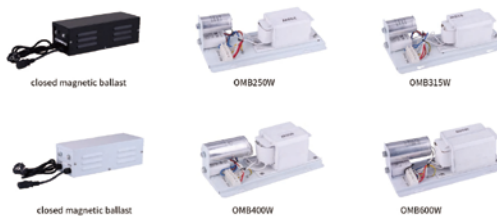

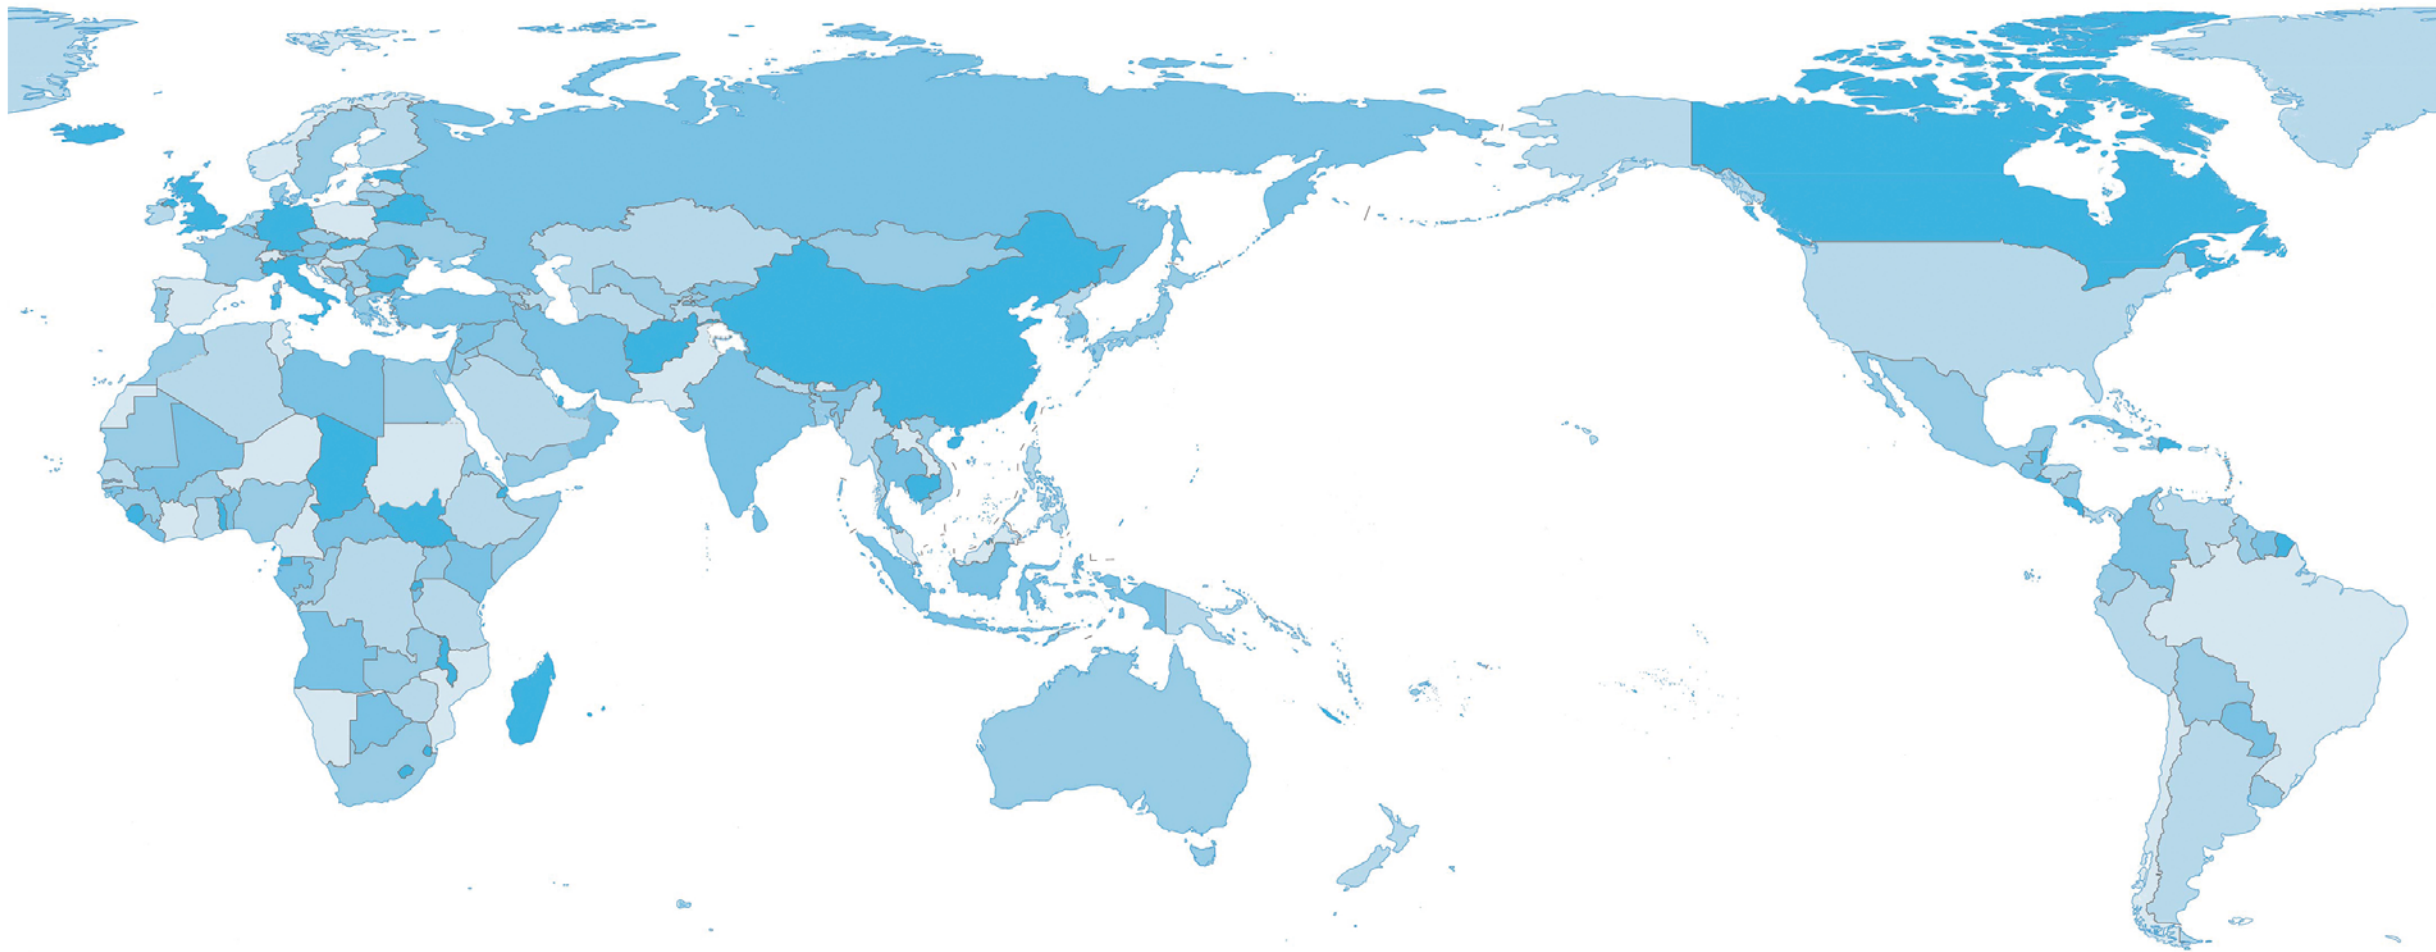

SINCE 1995

Company certification -

ErP ISO9001 ISO14001 new high-tech enterprise



Product certification -



Add: No. 10 Xiangyun road, wujin economic & development zone
Changzhou, Jiangsu, China
CHANGZHOU ALADDIN LIGHTING TECH CO., LTD