

2025 MANUAL

LED LIGHTS MANUAL

WE FOCUS ON LIGHTING
INDUSTRY FOR 30 YEARS.

QUALITY

INNOVATION

SERVICE



ALADDIN- LIGHT UP YOUR LIFE

About Us

For more than two decades, Aladdin Lighting has been a prominent player in the global lighting market, known for our seamless integration of industry and trade. As a leading manufacturer and exporter of high-quality LED lighting products, we have established ourselves as a trusted partner to clients across the globe.

Our Products

At Aladdin Lighting, we specialize in a comprehensive range of LED lighting solutions, designed to meet the diverse needs of our global clients:

- **Light Sources:**Filament lamps, bulb lamps, lamp tubes, and more.
- **Indoor Lighting:**Ceiling lights, downlights, spotlights, moisture-proof lights, fan lights, etc.
- **Outdoor Lighting:**Floodlights, street lamps, solar outdoor lighting, and more.
- **Creative Products:**Cube sockets and small appliances that blend innovation with functionality.

Global Reach and Certification

Our products are not only innovative but also adhere to the highest quality standards. We have obtained UL, CE, RoHS, CB, SAA, and other international certifications, ensuring that our offerings meet global safety and performance benchmarks. Aladdin Lighting proudly serves markets across Europe, the Americas, Australia, the Middle East, Southeast Asia, and beyond. We have established long-term partnerships with renowned supermarkets and multinational enterprises such as ELICA, ACE, Auchan, and OBI.

Aladdin Lighting is driven by a steadfast commitment to quality, service, and Innovation.Our goal is to foster strong partnerships that contribute to the development and progress of the global lighting industry.

ENTERPRISE HISTORY OF ALADDIN

INTRODUCTION

- 
- 1995** ● Start-up factory named ZhenXing lighting, producing R7s halogen bulb.
 - 2004 ○ Update to Changzhou Aladdin Lighting, beginning halogen bulb export.
 - 2014 ● Focus on Filament led and SMD led bulb.
 - 2016 ○ Enter the era of LED lighting.
 - 2019 ● Established an overseas company in Uzbekistan , created own brand named ALADIN & AMIBABA.
 - 2021 ○ Join Amazon platform and start lighting e-commerce business.
 - 2022 ● The factory moved to Jiujiang City, Jiangxi Province, named ChangRui Lighting.
 - 2023 ○ Cooperate with the Dutch Design Nest company. Develop creative lighting and home appliances.
 - 2024 ● Set up a factory in Zhongshan, Guangzhou. Produce and manufacture outdoor lighting fixtures and fan lamps.
 - 2025** ○ Expand sales team, develop new markets, and serve more customers.

CONTENTS

LED INDOOR LIGHTING

LED filament bulb	6
Adjustable LED filament bulb	7
LED SMD Bulb	8
LED Smart Bulb	9
Super slim panel light (side light)	10
LED big panel light	11
Slim led ceiling light	12
LED tri-proof ceiling light	13
Smart slim ceiling light	14-15
LED ceiling lamp	16-17
LED down light(PC)	18
LED Batten Light	19
LED strip light	20-22

LED OUTDOOR LIGHTING

Triproof light T8 Series	24
Triproof light SMD series(side-clip design)	25
Triproof light SMD series(without side clips)	26
Tir-proof linear lamp	27
LED highbay light	28
LED bulkhead lamp	29
LED flood light	30
LED wall light	31-36
Landscape LED Garden Light	37
LED street light	38-39

SOLAR ENERGY

Rechargeable flood light	41
LED solar flood light	42
LED solar street light	43

LED solar camping light	44
LED solar highbay light	45
LED solar courtyard wall light	46

COMMERCIAL LIGHTING

Magic series magnetic light	48-49
Multi-head COB LED downlight	50
Surface-mounted adjustable angle downlight	51
Surface mounted foldable COB downlight	52
LED COB down light	53
LED die-casting down light	54-56
LED downlight frame	57
Recessed LED Linear Light	58
Led Linear Pendant Light	59

FANLIGHT

E27 holder fan light	61
Ceiling fan with led lamp	62-66

CREATIVE PRODUCT

Power cube socket	68-69
Pat LED Night Lights	70
Cabinet lights	71
Multi-functional Magnetic Lamp	72

SPECIAL LIGHTING

Reptile Lighting daytime Series	74
Fishing Light	75
Plant lighting	76-77

LED INDOOR LIGHTING



Aladdin founded in 1995



Product Description

LED filament lamps seamlessly integrate beauty with illumination, offering a visually stunning lighting experience while maintaining high performance. Currently boasting a maximum luminous efficacy of up to 210lm/W, these lamps lead the way in energy efficiency, reducing energy consumption and enhancing sustainability. Our company is equipped with a comprehensive range of solutions tailored to cater to the diverse needs of various markets, ensuring that every client finds the perfect fit for their unique requirements.


Product Dimension

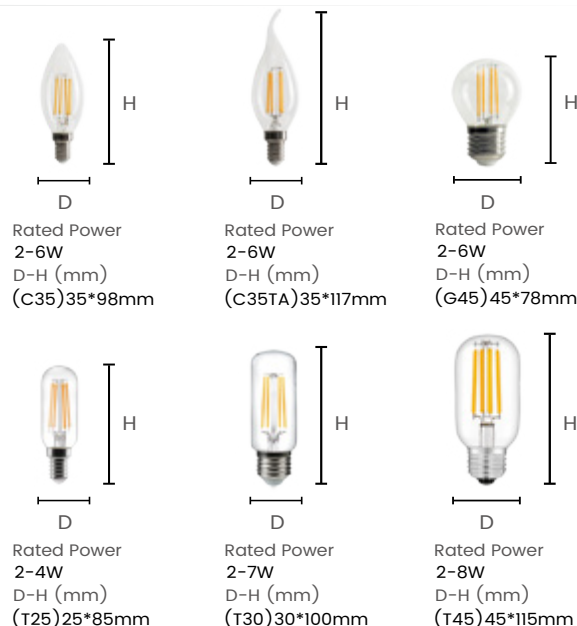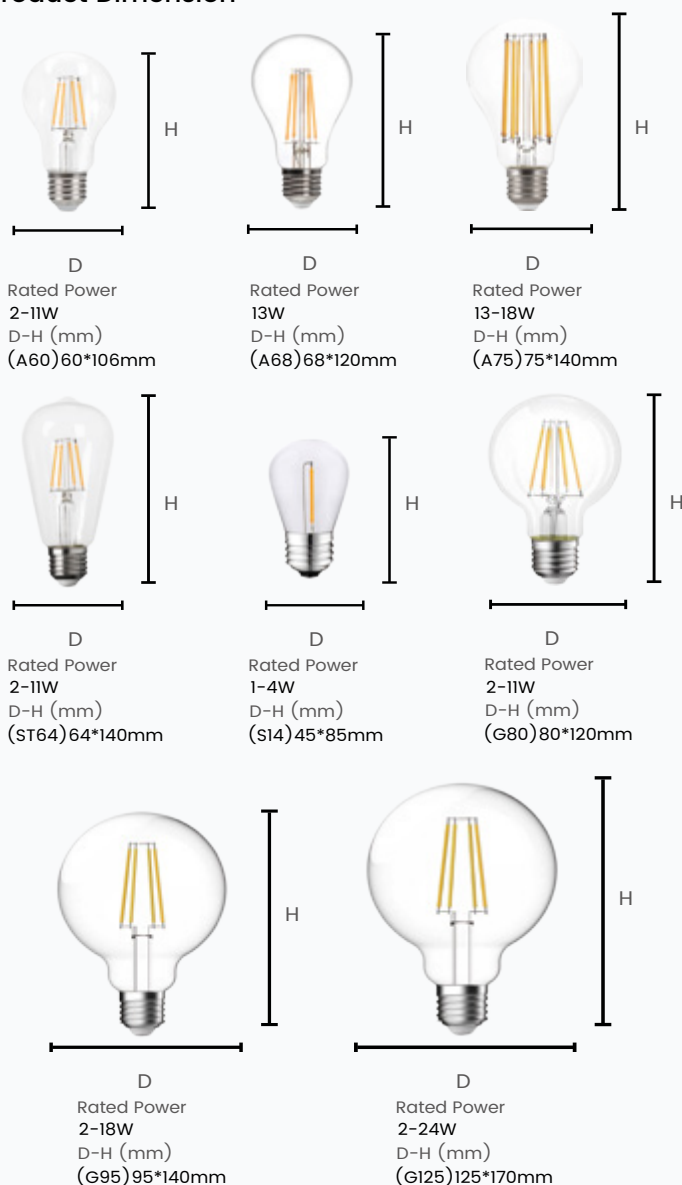

Technical Details



Basic Details

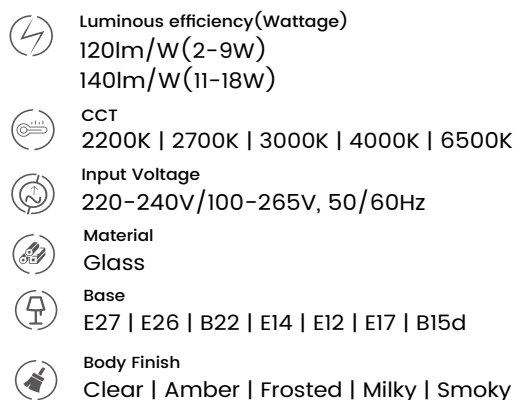

Optional selection--ADD Dimmable Modes




Dimmable and color adjustable LED filament lamp




Product Description

Designed to offer unparalleled versatility, this lamp not only supports seamless dimming but also dynamically adjusts its color temperature, ranging from a warm 2200K to a cool 6500K, effortlessly mimicking the transition of sunlight from dawn to dusk. This unique feature transforms your living spaces, creating ambiances tailored to your mood and the time of day. Boasting exceptional luminous efficiency, our LED Filament Lamp consumes significantly less energy compared to traditional incandescent bulbs, making it an eco-friendly and cost-effective choice for any home or office. By combining timeless aesthetics with cutting-edge LED technology, it represents the future of lighting – where elegance meets energy efficiency. Illuminate your life with the warmth and flexibility of our LED Filament Lamp today.

Product Dimension

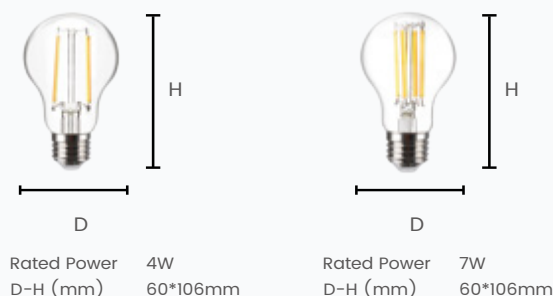


Installation effect display

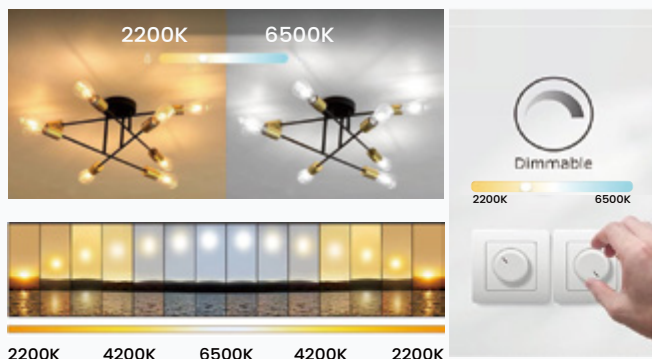

Technical Details



Basic Details

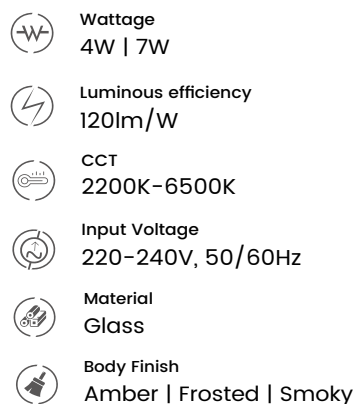

Light Distribution



Optional selection--3 Color Light Modes







Product Description

SMD LED bulb are a type of energy-efficient lighting solution that combines the benefits of LED technology with a durable plastic and aluminum construction. These bulbs are designed to replace traditional incandescent and halogen bulbs, offering longer lifespan, reduced energy consumption, and improved light output. The plastic packaging protects the internal components while the aluminum base provides excellent heat dissipation, ensuring reliable performance and extended product life.

Product Dimension

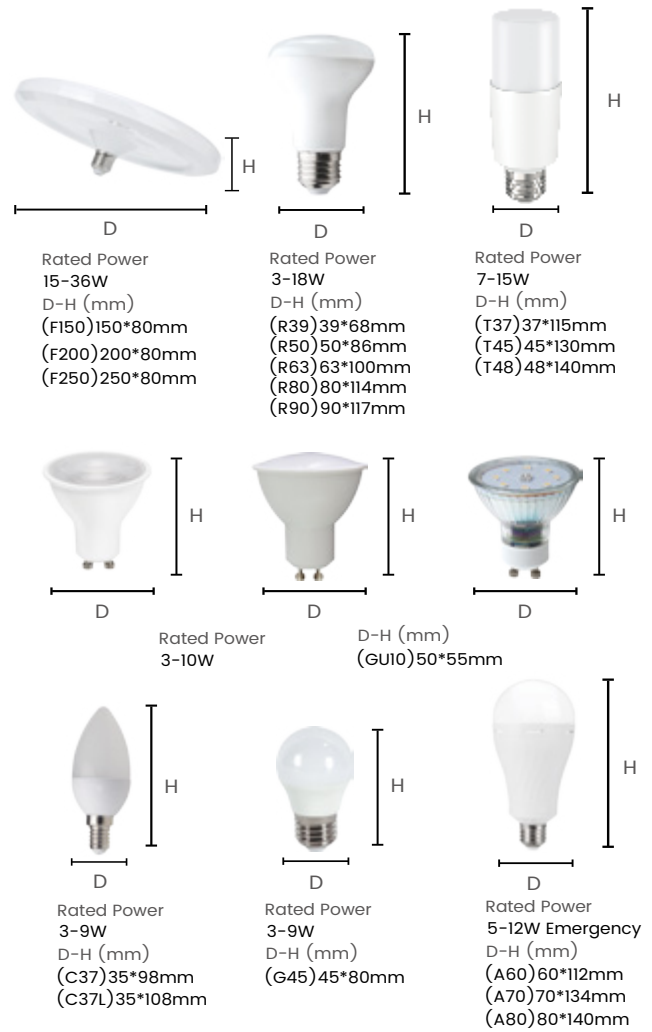


Technical Details



Basic Details

Energy efficiency level	Total main efficacy $\eta_{TM}(lm/W)$
A	$210 \leq \eta_{TM}$
B	$185 \leq \eta_{TM} < 210$
C	$160 \leq \eta_{TM} < 185$
D	$135 \leq \eta_{TM} < 160$
E	$110 \leq \eta_{TM} < 135$
F	$85 \leq \eta_{TM} < 110$
G	$\eta_{TM} < 85$

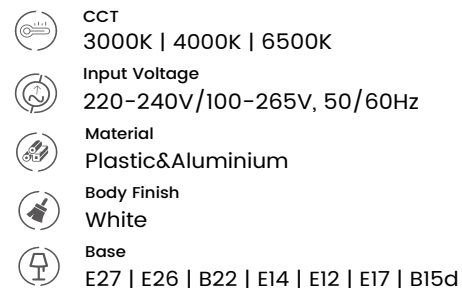




Product Description

LED Smart TUYA Bulb – a revolutionary lighting solution that fuses creativity with technology. Transform your space with vibrant, customizable colors and patterns, all controlled by your smartphone. Experience the future of illumination today.

Product Dimension

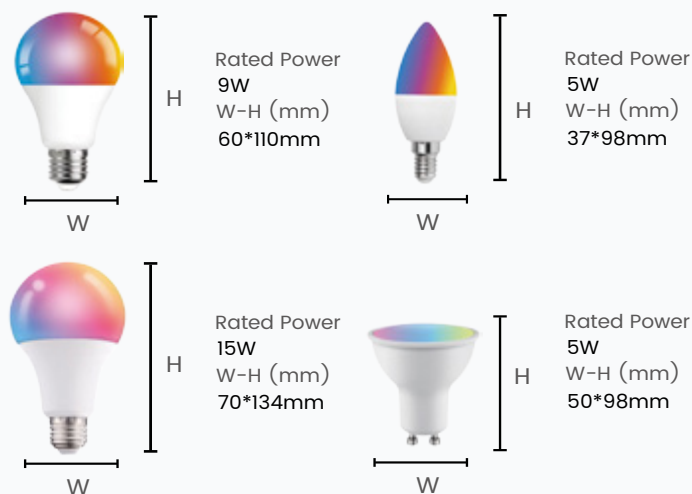

Installation method



Technical Details

IP20 RoHS CB CE CRI≥80

30,000 Hrs | LM80 | B10

Basic Details

Wattage
5W | 9W | 15W
Luminous efficiency
85lm/w
CCT
RGB+CCT



Input Voltage
220-240V/100-265V, 50/60Hz
Material
Plastic&Aluminium
Body Finish
White
Base
E27 | E26 | B22 | E14 | E12 | E17 | B15d

Timing Function


Set time/countdown to turn on/off of the bulb



SUPER SLIM PANEL LIGHT (Side light)



NEW

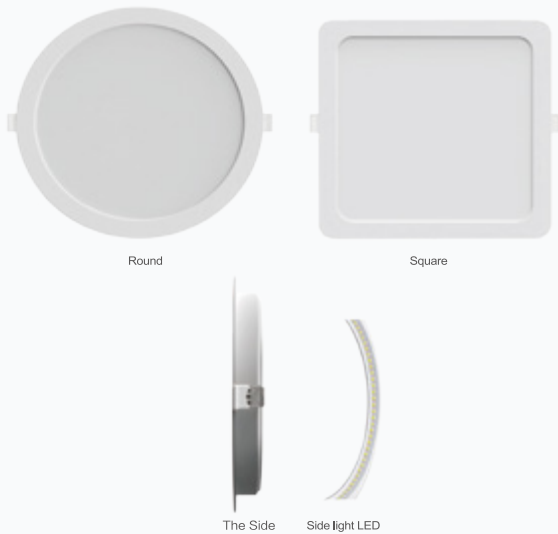

Product Description

The LED panel light features side-emitting technology, delivering a soft and uniform glow. It can be equipped with a surface-mounted frame, offering flexible installation options for both recessed and surface-mounted applications. With its ultra-thin profile, it seamlessly integrates into any interior design. Moreover, its excellent cost-performance ratio makes it an ideal choice for those seeking both quality and value.

Dimension

IC Driver

Rated Power	6W	Surface Cutout
D-H (mm)	128*14.8mm	Ø105-115mm
Rated Power	9W	Surface Cutout
D-H (mm)	145*15.8mm	Ø130-135mm
Rated Power	12W	Surface Cutout
D-H (mm)	170*15.8mm	Ø150-160mm
Rated Power	18W	Surface Cutout
D-H (mm)	225*16mm	Ø205-210mm
Rated Power	24W	Surface Cutout
D-H (mm)	300*16.3mm	Ø280-290mm
Rated Power	30W	Surface Cutout
D-H (mm)	300*16.3mm	Ø280-290mm

DOB IC Driver

Rated Power	5W	Surface Cutout
D-H (mm)	95*26mm	Ø75-90mm
Rated Power	9W	Surface Cutout
D-H (mm)	126*26mm	Ø90-110mm
Rated Power	12W	Surface Cutout
D-H (mm)	145*26mm	Ø120-135mm
Rated Power	18W	Surface Cutout
D-H (mm)	170*26mm	Ø140-160mm
Rated Power	24W	Surface Cutout
D-H (mm)	225*26mm	Ø190-210mm
Rated Power	30W	Surface Cutout
D-H (mm)	300*26mm	Ø270-290mm

IC Driver

Rated Power	6W	Surface Cutout
D-H (mm)	128*14.8mm	Ø105-115mm
Rated Power	9W	Surface Cutout
D-H (mm)	145*15.8mm	Ø130-135mm
Rated Power	12W	Surface Cutout
D-H (mm)	170*15.8mm	Ø150-160mm
Rated Power	18W	Surface Cutout
D-H (mm)	225*16mm	Ø205-210mm
Rated Power	24W	Surface Cutout
D-H (mm)	300*16.3mm	Ø280-290mm
Rated Power	30W	Surface Cutout
D-H (mm)	300*16.3mm	Ø280-290mm

DOB IC Driver

Rated Power	5W	Surface Cutout
D-H (mm)	95*26mm	Ø75-90mm
Rated Power	9W	Surface Cutout
D-H (mm)	120*26mm	Ø90-110mm
Rated Power	12W	Surface Cutout
D-H (mm)	145*26mm	Ø120-135mm
Rated Power	18W	Surface Cutout
D-H (mm)	170*26mm	Ø140-160mm
Rated Power	24W	Surface Cutout
D-H (mm)	225*26mm	Ø190-210mm
Rated Power	30W	Surface Cutout
D-H (mm)	300*26mm	Ø270-290mm


Technical Details

IP20 54	RoHS	CB	CE	CRI≥80
30,000 Hrs LM80 B10				


Basic Details

Wattage	5W 9W 12W 18W 24W 30W
Luminous efficiency	85lm/W 100lm/W
CCT	3000K 4000K 6500K
Input Voltage	165-265V, 50/60Hz
Material	Plastic
Body Finish	White


Light Distribution

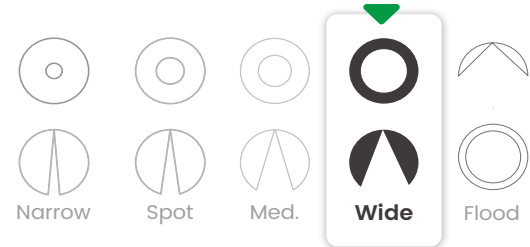

Mounting Information




Optional selection--Surface-mounted frame

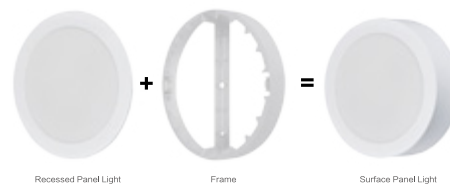

Circular/Square frame for lamp with IC Driver	Height	29mm
Circular/Square frame for lamp with DOB IC Driver	Height	32mm

Optional selection--CCT and Power adjustable

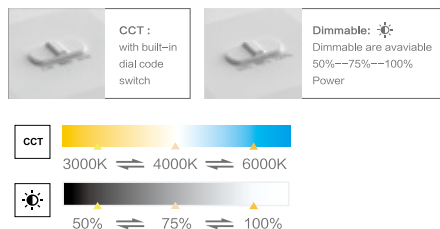

LED Big Panel Light




Product Description

LED Big Panel Lights are efficient, energy-saving illumination solutions featuring broad illumination areas and high luminous efficiency. Crafted with high-quality LEDs, they offer bright, uniform light distribution while maintaining low heat generation and long lifespan. Perfect for commercial, industrial, and residential spaces, they enhance lighting quality and reduce energy consumption.


Dimension

LED Big Panel Light
Side lit




Rated Power	36W/40W/48W
A-B-C (mm)	595*595*8
Rated Power	36W/40W/48W
A-B-C (mm)	295*1195*8
Rated Power	64W/72W
A-B-C (mm)	595*1195*8

LED Big Panel Light
Back lit



Rated Power	36W/40W
A-B-C (mm)	595*595*30
Rated Power	36W/40W
A-B-C (mm)	295*1195*30
Rated Power	64W/72W
A-B-C (mm)	595*1195*30

Installation method

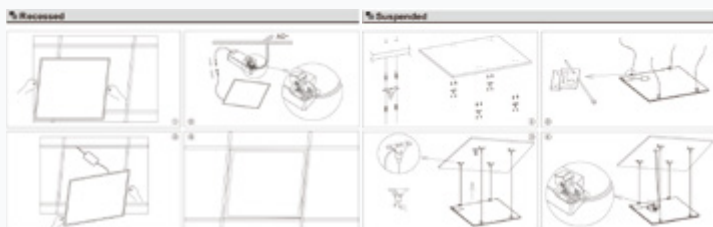


Technical Details

IP20	RoHS	CB	CE	CRI≥80
UGR<19/22	30,000 Hrs	LM80	B10	


Basic Details

Wattage	36W 40W 48W 64W 72W
Luminous efficiency	100lm/W 120lm/W (Back lit) 80lm/W 90lm/W 100lm/W (Side lit)
CCT	3000K 4000K 5000K 6500K
Input Voltage	100-265V 220-240V , 50/60Hz
Material	(Back lit) Aluminum frame + iron base + diffuser (PS) (Side lit) Aluminum frame + iron base + cushion pad + light guide plate (PMMA/PS) + reflective paper + diffuser (PS)
Body Finish	White


Mounting Information



Light Distribution

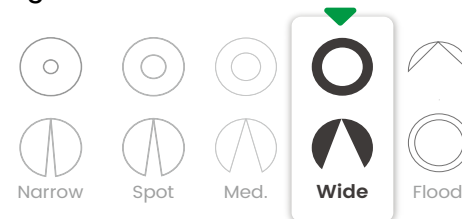


Optional selection--0-10V or Triac Dimmable

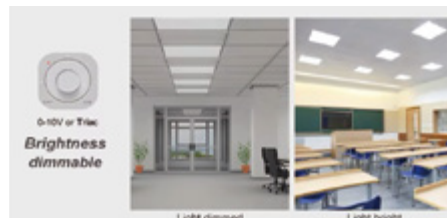

Optional selection--CCT adjustable




SLIM LED CEILING LIGHT

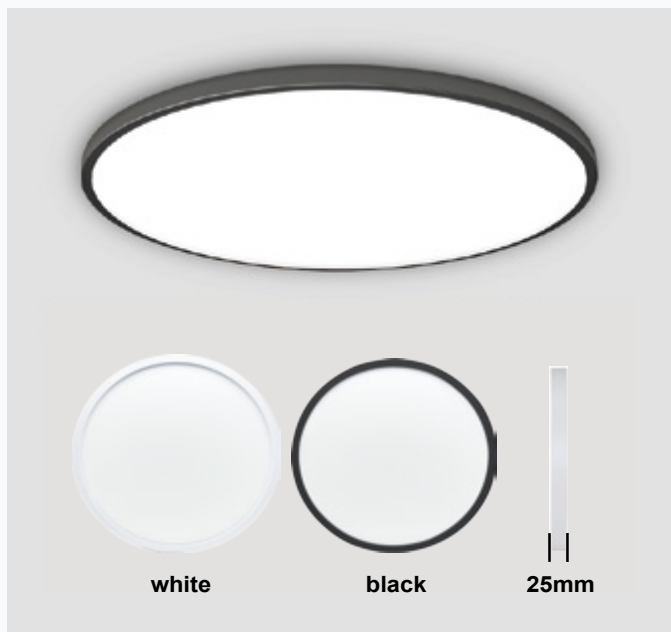

Product Description

This LED ceiling light features side illuminated technology, emitting a gentle and cozy glow. Measuring just 2cm in thickness, it's extremely thin and seamlessly integrates into any interior design. Installation is incredibly simple. Whether it's for the living room, bedroom, or study, this LED ceiling light enhances the beauty and warmth of your home.

Dimension



Rated Power	22W
D-H (mm)	230*20mm
Rated Power	26W
D-H (mm)	300*20mm
Rated Power	34W
D-H (mm)	400*20mm
Rated Power	42W
D-H (mm)	500*20mm

Easy to Installation in Minutes by ONE Person




Technical Details

IP20	RoHS	CB	CE	CRI≥80	UGR<19
30,000 Hrs LM80 B10					


Basic Details

Wattage	22W 26W 34W 42W
Luminous	1980lm 2340lm 3400lm 4200lm
CCT	3000K 4000K 6500K
Input Voltage	220-240V, 50/60Hz
Material	Plastic
Body Finish	White Black

Light Distribution

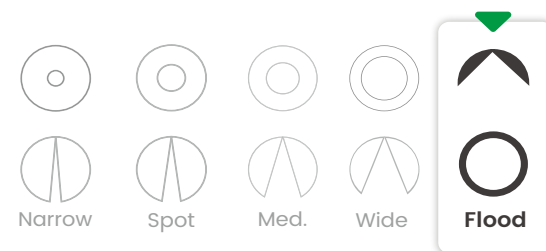


Mounting Information



Structural Diagram



LED TRI PROOF CEILING LIGHT

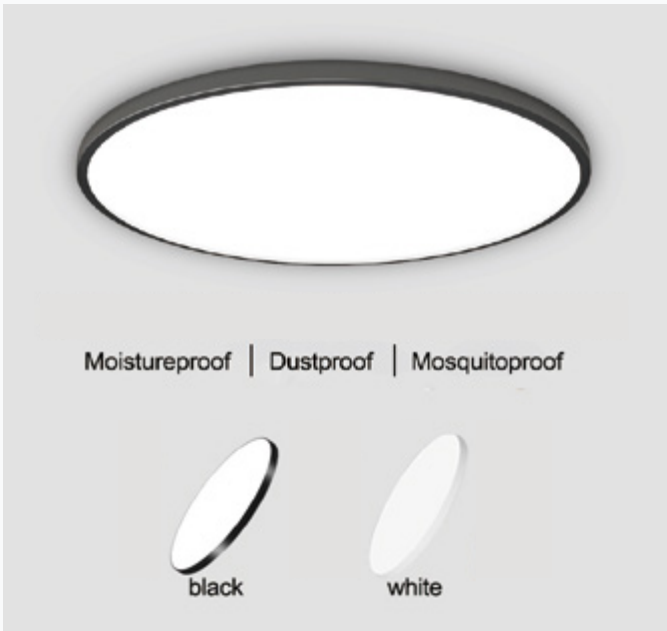

Product Description

This all plastic thin ceiling light adopts LED lens light source, emitting uniform and bright light from the bottom. Cost-effective and energy-saving, it offers excellent resistance to moisture, insects, and dust. Easy to install and disassemble, it's a practical and stylish lighting solution for any home.

Dimension

	Rated Powe	18W
	D-H (mm)	250*50mm
	Rated Powe	24W
	D-H (mm)	320*55mm
	Rated Powe	32W
	D-H (mm)	380*60mm
	Rated Powe	40W
	D-H (mm)	480*70mm

Technical Details

IP44

RoHS

CB

CE

CRI≥85

30,000 Hrs

LM80

B10

Basic Details

Wattage
18W | 24W | 32W | 40W

Luminous efficiency
100lm/W

CCT
2700K | 3000K | 4000K | 5000K | 6500K | 3CCT

Input Voltage
165-265V | 100-265V, 50/60Hz

Material
Plastic

Body Finish
White | Black

Light Distribution

Narrow

Spot

Med.

Wide

Flood

Mounting Information

Recessed

Suspended

Surface

Track

Self Adhesive Double Sided Tape

Installation method


SMART SLIM CEILING LIGHT WITH BACK LIGHT



Product Description

SMART SLIM CEILING LIGHT WITH BACK LIGHT - an innovative lighting masterpiece that elevates your home decor. Featuring dimming capabilities, and smart scheduling, it offers unparalleled convenience and energy efficiency. What sets it apart is its stunning backlit ambient lighting that can emit a myriad of colors, creating the perfect ambiance for any occasion or mood. From warm and cozy to cool and vibrant, the Smart Ceiling Light transforms your space into a personalized oasis.


Product Dimension

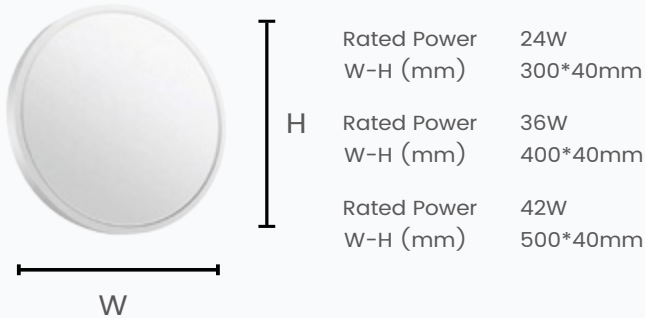



Installation method





Technical Details




Basic Details

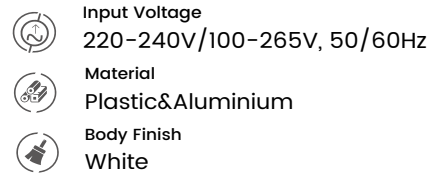

Optional selection--Remote control

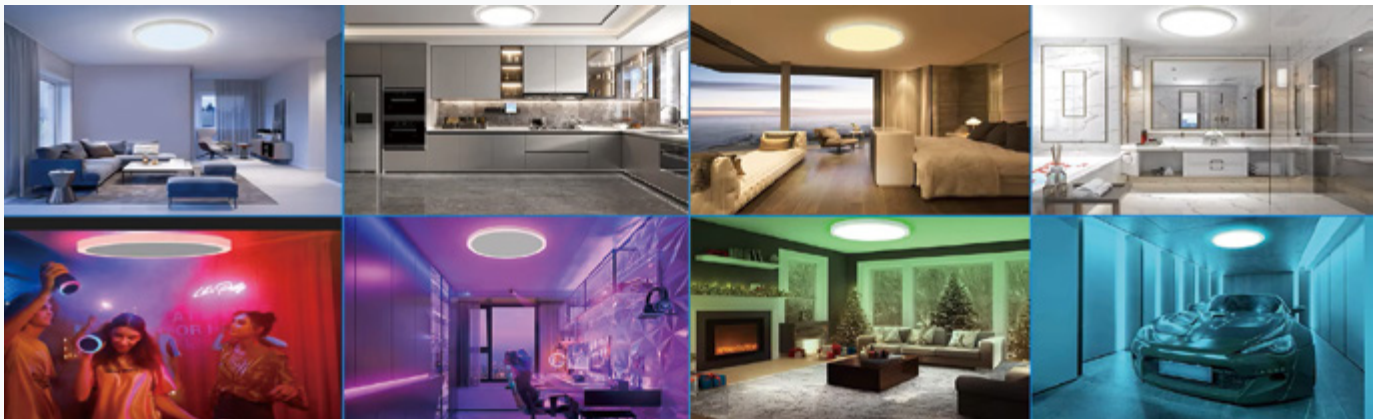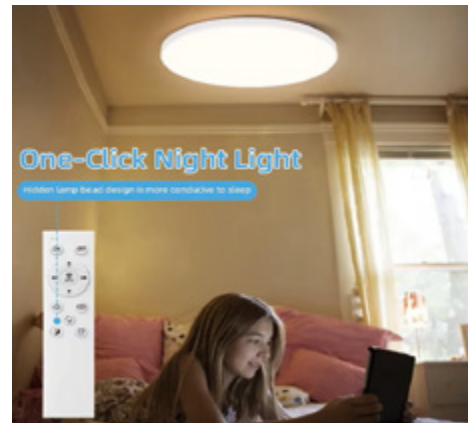

New Panel Light with Auxiliary Lighting

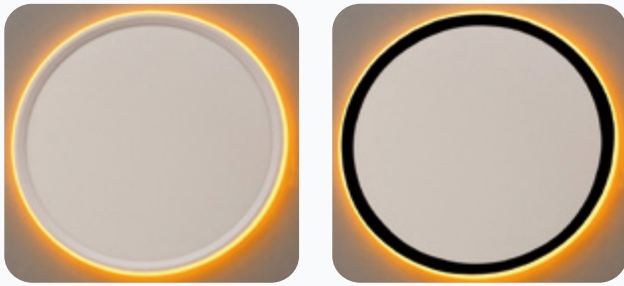

Product Description

This cutting-edge panel light stands out in the market with its ultra-thin design and innovative side-glowing technology, delivering softer, more elegant lighting with enhanced visual effects.

Key Features:

✓ 2.4G Remote Control – Easily adjust CCT (color temperature) and switch to night light mode for customized comfort.


✓ Upgraded "King of Karaoke" Edition (Optional) – Take entertainment to the next level with:

Built-in Bluetooth Speaker for wireless music streaming

Cool LED Mic for a fun singing experience

Dynamic Ambient Lighting to set the perfect party vibe

Dimension

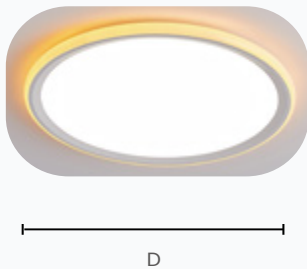

Rated Power	24W
D-H (mm)	Φ320 *30
Rated Power	36W
D-H (mm)	Φ420 *30
Rated Power	48W
D-H (mm)	Φ520 *30

Installation method



Drehbarer Kunststofffuß



Feste Halterung



Anschlussdrähte



Schnelle einfache Installation

Technical Details

IP20 RoHS CB CE CRI≥80

30,000 Hrs | LM80 | B10

Basic Details

Wattage
24W | 36W | 48W

Luminous
90lm/W

CCT
CCT+Warm white

Input Voltage
220-240V/100-265V, 50/60Hz

Material
Plastic

Body Finish
White | Black


Mounting Information



Recessed



Suspended



Surface



Track



Self Adhesive
Double Sided Tape

Light Distribution



Narrow



Spot



Med.



Wide



Flood

Optional selection--Upgraded Version!
Become the King of Karaoke

TUYA App + Bluetooth Speaker + Microphone






Product Description


LED ceiling lights, designed with a unique feature that allows for effortless replacement of various stylish lampshades. Elevate your space's ambiance and personalize your lighting experience by simply swapping out the lampshade to match your decor or mood. Bright, energy-efficient, and stylish – the perfect blend for any modern home.

Dimension

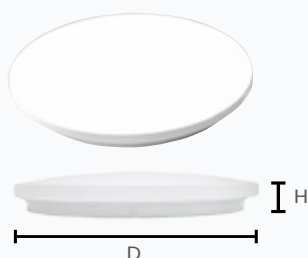

Rated Power	12W
D-H (mm)	260*70mm
Rated Power	18W
D-H (mm)	330*70mm
Rated Power	32W
D-H (mm)	380*70mm
Rated Power	48W
D-H (mm)	480*70mm


INSTALLATION STEPS

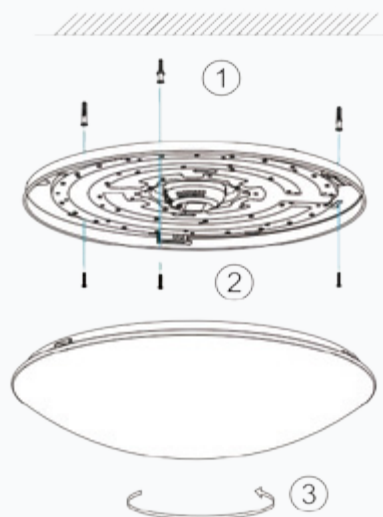


Technical Details




Basic Details

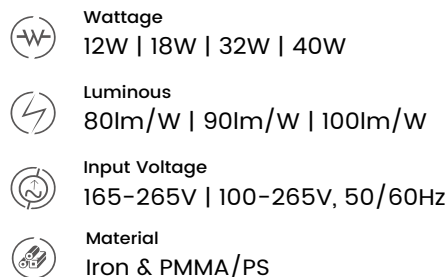


Mounting Information




Light Distribution


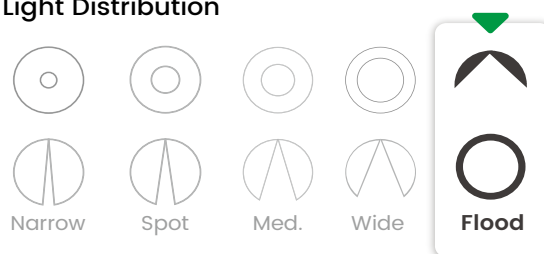


Optional selection- CCT adjustable by turning on and off



Optional selection-ADD MICROWAVE SENSOR

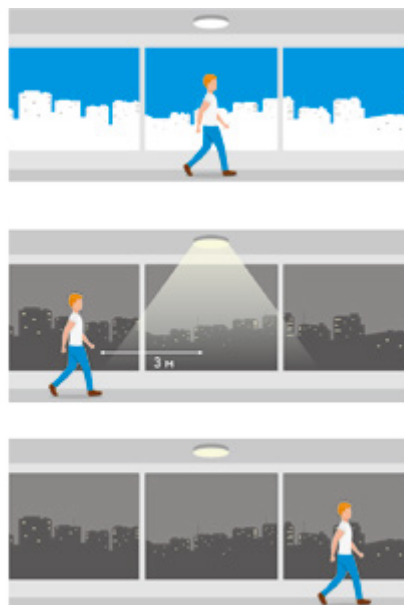




LED COB down light



Product Description

LED COB downlights are modern, energy-efficient lighting solutions. With a compact design , they offer precise, focused lighting for various spaces. Long-lasting and safe to use, they are a stylish and practical choice for modern interiors.

Dimension

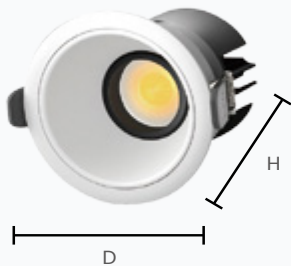

Rated Power	7W	Surface Cutout
D-H (mm)	66-65	Ø55mm
Rated Power	10W	Surface Cutout
D-H (mm)	85-75	Ø75mm
Rated Power	14W	Surface Cutout
D-H (mm)	110-90	Ø95mm

Technical Details

IP44

RoHS

CB

CE

CRI≥85

UGR<19

30,000 Hrs | LM80 | B10

Basic Details

Wattage

7W | 10W | 14W

CCT

3000K | 4000K | 6000K

Input Voltage

220-240V,50/60Hz

Material

Aluminum

Body Finish

White | Black

Mounting Information

Recessed

Suspended

Surface

Track

Self Adhesive Double Sided Tape

Light Distribution

Narrow

Spot

Med.

Wide

Flood

7W Rated Power

Driver Details : 300mA Output Current | 36V Output Voltage

Lumen : 630lm Efficacy : 90lm/W CCT : 3000K	Lumen : 700lm Efficacy : 100lm/W CCT : 4000K	Lumen : 700lm Efficacy : 100lm/W CCT : 6000K
---	--	--

10W Rated Power

Driver Details : 300mA Output Current | 36V Output Voltage

Lumen : 900lm Efficacy : 90lm/W CCT : 3000K	Lumen : 1000lm Efficacy : 100lm/W CCT : 4000K	Lumen : 1000lm Efficacy : 100lm/W CCT : 6000K
---	---	---

14W Rated Power

Driver Details : 300mA Output Current | 36V Output Voltage

Lumen : 1260lm Efficacy : 90lm/W CCT : 3000K	Lumen : 1400lm Efficacy : 100lm/W CCT : 4000K	Lumen : 1400lm Efficacy : 100lm/W CCT : 6000K
--	---	---

Powered by

MLS

BMTC

Smalite

Power Supply

Aladdin



Product Description

LED Batten Lights are modern lighting fixtures that feature long, straight tubes filled with LED bulbs. They provide bright, even illumination and are energy-efficient, making them a popular choice for industrial, commercial, and residential spaces. LED batten lights are durable, long-lasting, and can significantly reduce energy costs compared to traditional lighting options.

Dimension

Description



H65

Rated Power 18W 36W
L-W-H (mm) 600*65*20 1200*65*20




H75

Rated Power 18W 36W
L-W-H (mm) 600*75*24 1200*75*24



L55

Rated Power 18W 36W
L-W-H (mm) 600*55*21 1200*55*21



L63

Rated Power 18W/27W 36W/54W
L-W-H (mm) 600*55*24 1200*55*24



L75


Rated Power 28W/36W 54W/72W
L-W-H (mm) 600*75*26 1200*75*26



L100

Rated Power 28W/36W 54W/72W
L-W-H (mm) 600*103*28 1200*103*28

Installation Methods

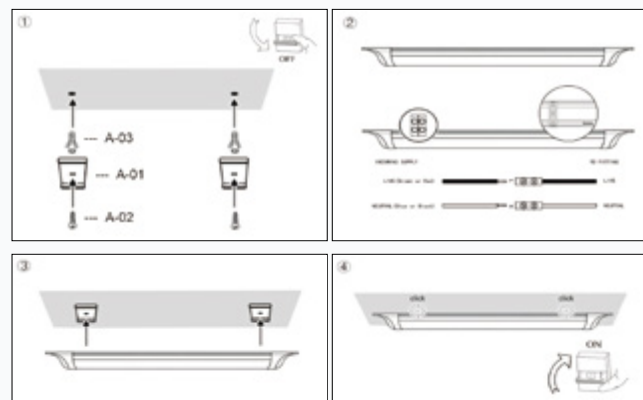


Technical Details





Basic Details




Mounting Information



Light Distribution

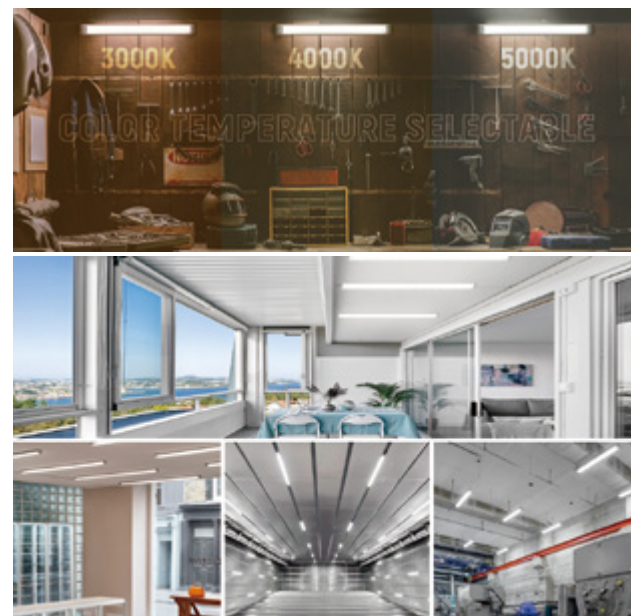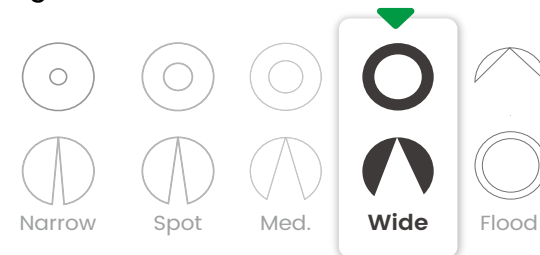

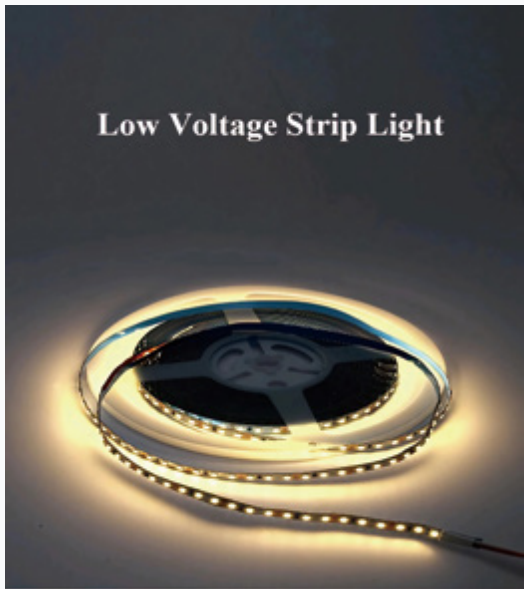

Product Description

LED light strings are energy-efficient, long-lasting, and easily shaped. Use them indoors or outdoors to create beautiful lighting effects in any space. Easy to install and adjustable, they offer a perfect lighting solution for any occasion.

Dimension




Size(mm): 5M/ROLL PCB Siz(mm): 8mm


Technical Details




Basic Details

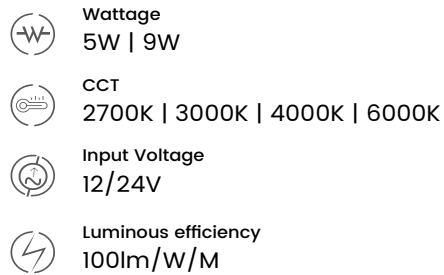

Light Distribution

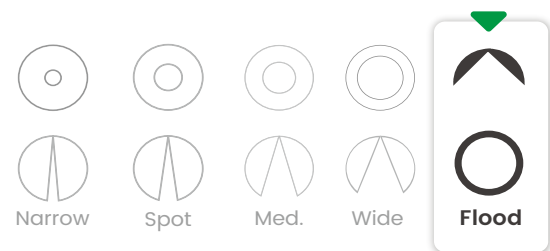

IP selection



- | | |
|------|--|
| IP20 | Non-waterproof, 3M adhesive on the back. |
| IP54 | Paint a thin layer of silicon glue on the led strip, 3M adhesive on the back. |
| IP65 | Paint a thick layer of silicon glue on the led strip, 3M adhesive on the back. |
| IP66 | Wrap the led strip by heat shrink tube, 3M adhesive on the back. |
| IP67 | Put the led strip into the silicone tube, without 3M adhesive on the back. |
| IP68 | Put the led strip into the silicone tube, and filled with glue, or extrusion the led strip to silicon tube |


12v/24 led strip light



Product Description

The COB light belt offers a modern and energy-saving lighting solution. With numerous LEDs mounted on a flexible board, it provides a bright and uniform light, perfect for highlighting features or creating a desired ambiance. Safe and versatile, it's the perfect choice for a range of indoor and outdoor applications.

Dimension

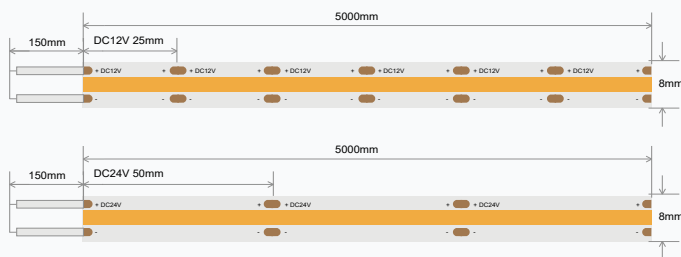

Size(mm): 5M/ROLL PCB Siz(mm): 8mm


12V: 480LEDS/M

24V: 480LEDS/M


Technical Details




Basic Details

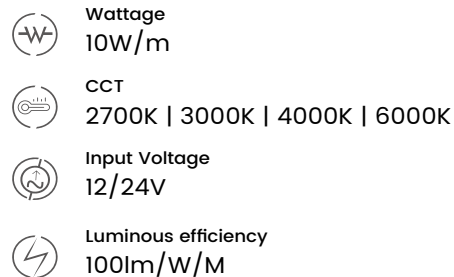

Light Distribution

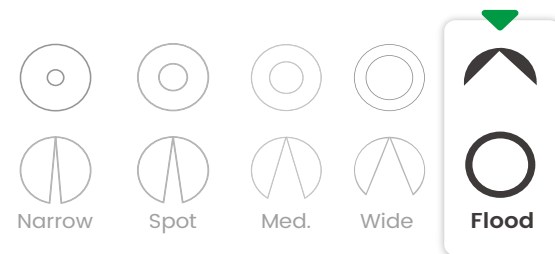

IP selection



- IP20** Non-waterproof, 3M adhesive on the back.
- IP65** Paint a thick layer of silicon glue on the led strip, 3M adhesive on the back.
- IP67** Put the led strip into the silicone tube, without 3M adhesive on the back.
- IP68** Put the led strip into the silicone tube, and filled with glue, or extrusion the led strip to silicon tube


24 led Flexible neon strip



Product Description


The neon strip , known for its vibrant colors, is a popular choice for indoor and outdoor lighting. Safe, energy-efficient, and easily customizable, it's the perfect addition to any space seeking a unique and captivating light display.

Dimension



Size(mm): 5M/ROLL PCB Siz(mm): 6-12mm
120LEDS/M


ACCESSORIES

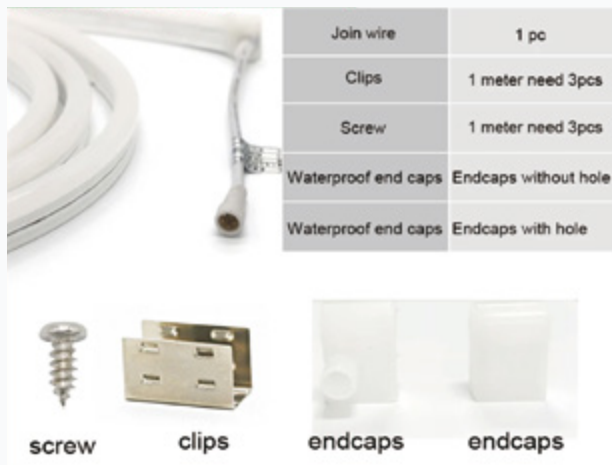


Technical Details




Basic Details

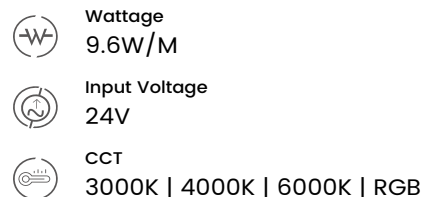

Light Distribution

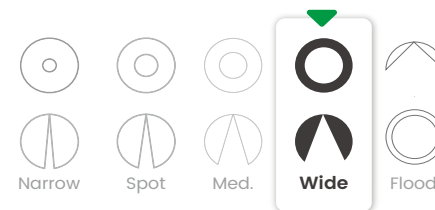

CUTTING

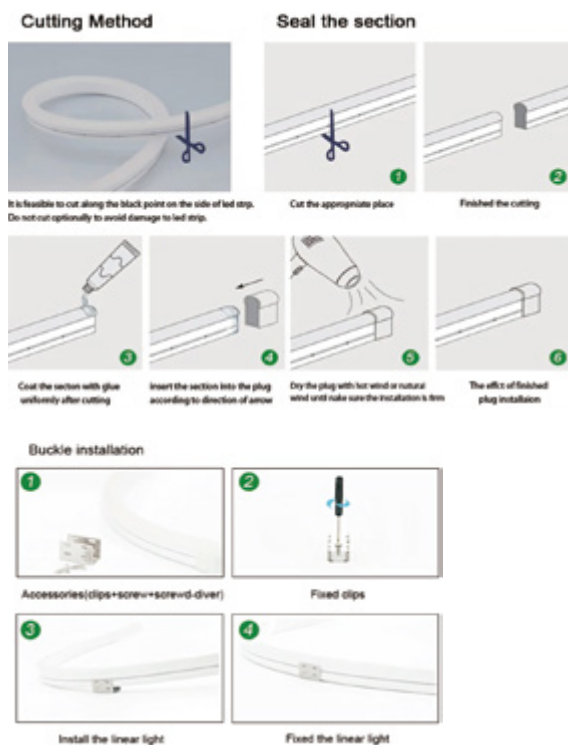

LED OUTDOOR LIGHTING


Aladdin founded in 1995



Product Description

The T8 series of triple-protection lights are not only durable and functional, but also feature dustproof, waterproof, and shockproof capabilities. With a sleek design, they are perfect for a range of indoor and outdoor settings. What's more, installing or removing the T8 light tubes is straightforward, adding to its overall convenience.

Dimension

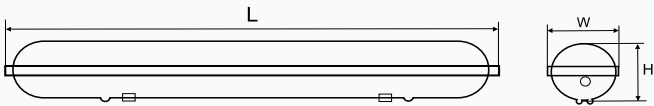

	T8-2*1500mm L-W-H (mm)	T8-1*1500mm L-W-H (mm)	T8-2*1200mm L-W-H (mm)	T8-1*1200mm L-W-H (mm)
TYPE B	1575*95*60	1575*65*60	1275*95*60	1275*65*60
TYPE C	1566*112*83	1566*69*83	1265*112*83	1265*69*83
TYPE H	1570*113*60	1570*68*60	1270*113*60	1270*68*60
TYPE J	1562*103*71	1562*71*71	1262*103*71	1262*71*71

Technical Details

IP65 RoHS


Basic Details

Wattage
From T8


Material
Body: PC/ABS/HIPS
Diffuser: PC/PS

Body Finish
White

Light Distribution

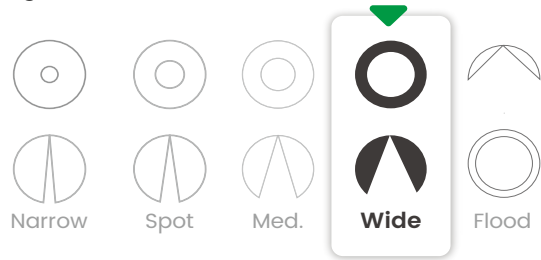

Mounting Information



	T8-2*600mm L-W-H (mm)	T8-1*1200mm L-W-H (mm)
TYPE B	665*95*60	665*65*60
TYPE C	661*112*83	661*69*83
TYPE H	675*113*60	675*68*60
TYPE J	662*103*71	662*71*71

Description

Minimum size

Maximum size

Flat size
(widest and shortest)

Moderate size

3 Installation Methods: Ceiling Installation, Hanging Installation and Wall Installation




Triproof Light SMD Series (side-clip design)



Product Description

The SMD series of triple-protection lights are not only durable and functional, but also feature dustproof, waterproof, and shockproof capabilities. With a sleek design, they are perfect for a range of indoor and outdoor settings.

Dimension

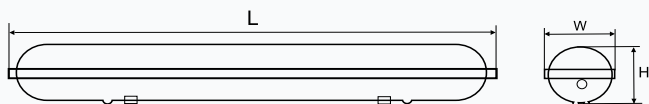

TYPE E	TYPE U	TYPE G	TYPE F
Rated Power L-W-H (mm)	Rated Power L-W-H (mm)	Rated Power L-W-H (mm)	Rated Power L-W-H (mm)
/	80W 1800*105*69.5mm	80W 1800*80*69mm	80W 1800*90*75mm
54W 1500*71*58mm	60W 1500*105*69.5mm	60W 1500*80*69mm	60W 1500*90*75mm
36W 1200*71*58mm	40W 1200*105*69.5mm	40W 1200*80*69mm	40W 1200*90*75mm
18W 600*71*58mm	20W 600*105*69.5mm	20W 600*80*69mm	20W 600*90*75mm
Minimum size	Maximum size	Moderate size	Maximum height


Technical Details




Basic Details

- Wattage**
20W | 40W | 60W | 80W
- Luminous**
100lm/W | 120lm/W | 130lm/W | 140lm/W
- CCT**
3000K | 4000K | 5000K | 6500K
- Input Voltage**
220-240V/100-265V, 50/60Hz
- Material**
Body: PC,ABS
Diffuser: PC
- Body Finish**
White

Mounting Information



Light Distribution

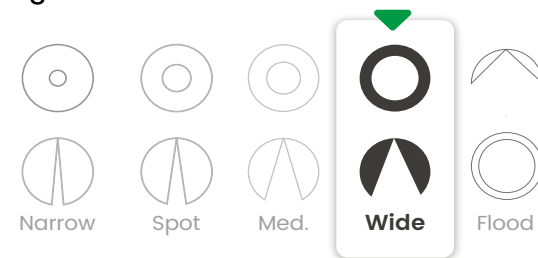

Installation Methods




Triproof Light SMD Series (without side clips)



Product Description

The SMD series of triple-protection lights are not only durable and functional, but also feature dustproof, waterproof, and shockproof capabilities. With a sleek design, they are perfect for a range of indoor and outdoor settings.

Dimension

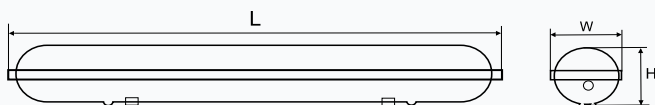

TYPE Q

Rated Power
L-W-H (mm)

54W
1500*76*70mm
36W
1200*76*70mm
18W
600*76*70mm

Maximum size

TYPE T

Rated Power
L-W-H (mm)

48W
1500*68*65mm
36W
1200*68*65mm
18W
600*68*65mm

Moderate size

TYPE TPF

Rated Power
L-W-H (mm)


48W
1500*60*60mm
36W
1200*60*60mm
18W
600*60*60mm

Minimum size


Installation Methods




Technical Details




Basic Details

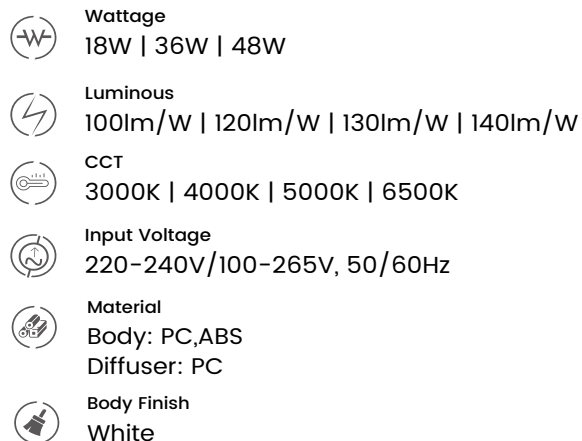

Mounting Information



Light Distribution

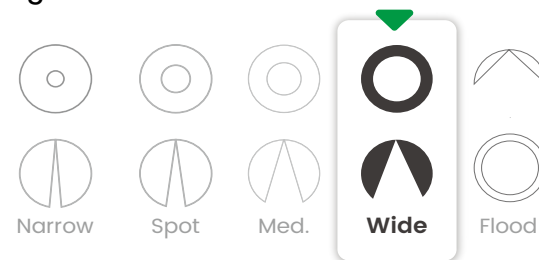

Optional selection--Linkable




Tir-proof linear lamp



Product Description

This Tir-proof linear lamp offers an exceptional value for money, making it an attractive option for a wide range of lighting needs. Its lightweight design ensures convenient handling and quick installation, while its high brightness effectively illuminates spaces, providing clear and bright lighting. Additionally, its IP65 waterproof rating ensures reliability and durability, even in wet or damp environments. Whether you're looking for a dependable outdoor light or a versatile indoor solution, this triple-proof light is a great choice.

Dimension

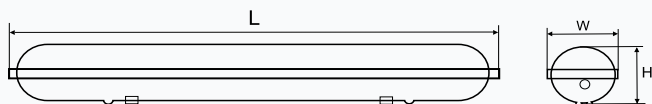

TPL6050

Rated Power
L-W-H (mm)

48W
1500*50*60mm
36W
1200*50*60mm
18W
600*50*60mm

Maximum size

TPL5235

Rated Power
L-W-H (mm)

48W
1500*35*52mm
36W
1200*35*52mm
18W
600*35*52mm

Moderate size

TPL4030

Rated Power
L-W-H (mm)


48W
1500*30*40mm
36W
1200*30*40mm
18W
600*30*40mm

Minimum size


Installation Methods




Technical Details




Basic Details

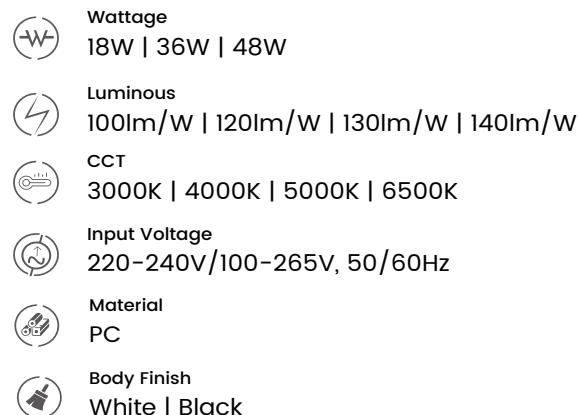

Mounting Information




Light Distribution

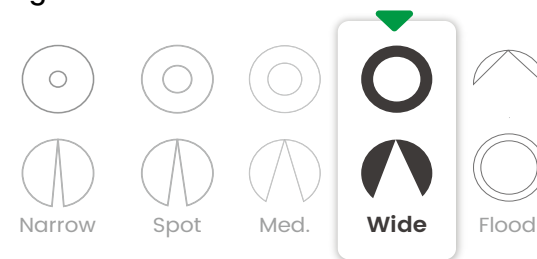

Optional selection--Linkable




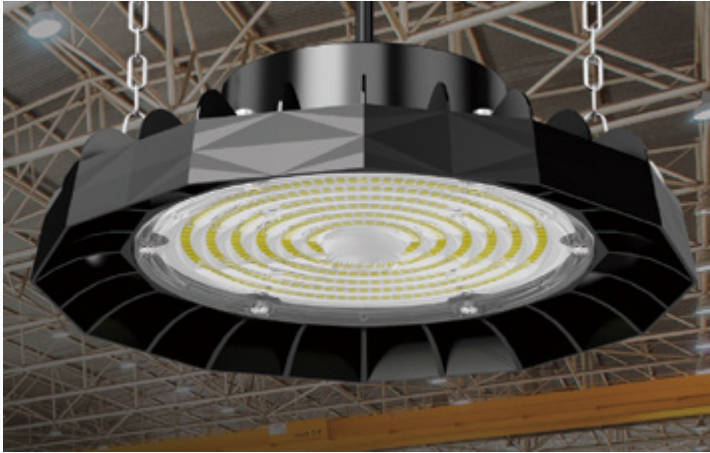

Product Description


- It With SMD3030/2835, this LED highbay light provides excellent lumen output, long-lasting stability and splendid sight.
- It is driven by high-end LED with long service life.
- Unique heat dissipation design and stable product performance.
- Excellent heat dissipation function, significantly improving service life and efficiency.
- 0-10V, Dali, time dimming fit for different project demand.
- additional Microwave induction, Light compensation function for choice.

Dimension

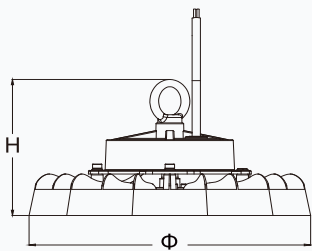

Rated Power	100W
D-H (mm)	240*145mm
Rated Power	150W
D-H (mm)	280*145mm
Rated Power	200W
D-H (mm)	320*145mm
Rated Power	240W
D-H (mm)	320*145mm

INSTALLATION

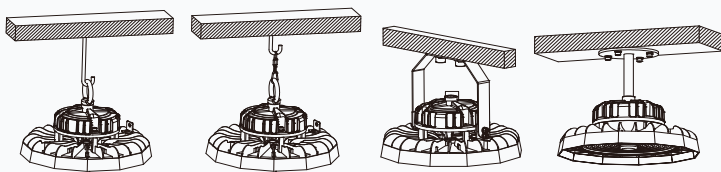

1. Hook Hanging

2. Chain Hanging

3. Mount Surface

4. Pole Hanging


Technical Details

IP65	RoHS	CB	CE	CRI≥70
30,000 Hrs/50,000 Hrs LM80 B10				

Basic Details

Wattage	100W 150W 200W 240W
Luminous	120lm/W 145lm/W 175lm/W
CCT	3000K 4000K 6500K
Input Voltage	100-265V, 50/60Hz
Material	Aluminum
Body Finish	Black


Mounting Information



Optional selection-Luminous Angle




Optional selection-multipl powersettings /CCT controlled by a dipswitch

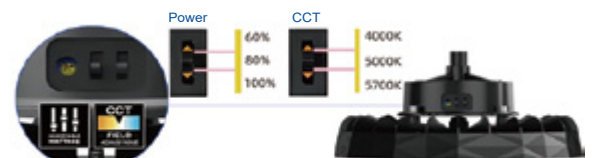

Unique design, multipl powersettings/CCT controlled by a dipswitch

Optional selection-Microwave sensor /0-10V Dimmable

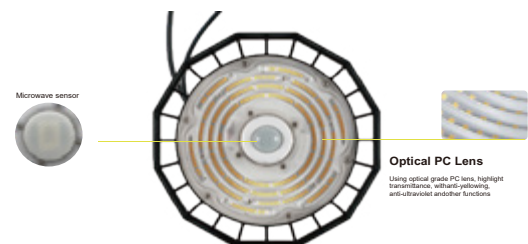


LED Bulkhead Lamp




Product Description

The LED Bulkhead Lamp offers IP65 waterproof protection, making it a perfect choice for installation in damp or wet environments. Boasting a sleek and minimalistic design, it complements any space with its elegant simplicity. Installation is straightforward and convenient. What's more, its high light-emitting efficiency ensures bright and uniform illumination, creating a cozy and welcoming atmosphere. Whether it's for the courtyard, garage, or any other damp area, this LED Bulkhead Lamp is the ideal solution for robust and reliable lighting.

Dimension

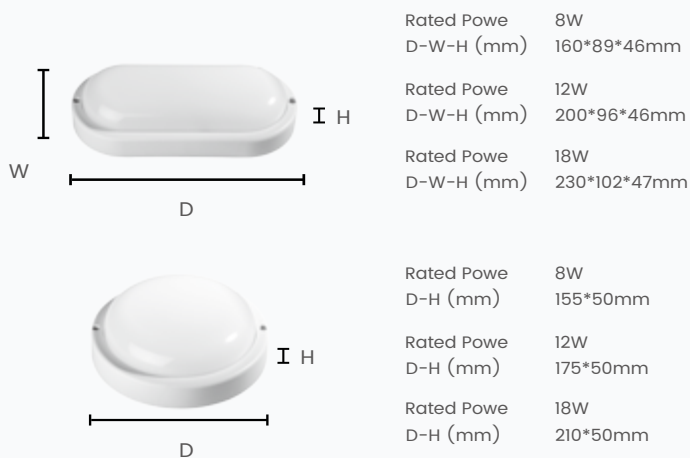

INSTALLATION STEPS

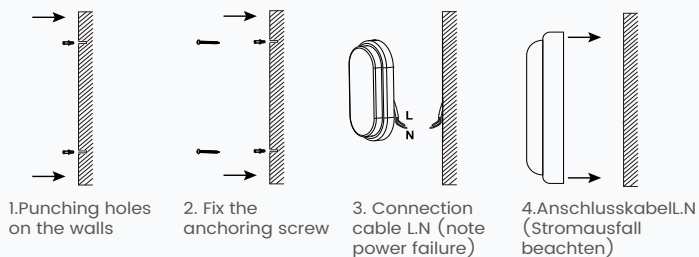


Technical Details




Basic Details



Mounting Information



Light Distribution

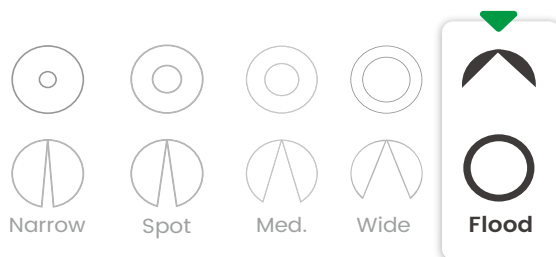

Optional selection

ADD MICROWAVE SENSOR






Product Description


The LED floodlight offers a sleek and powerful outdoor lighting solution. Its die-cast aluminum shell not only ensures durability but also facilitates efficient heat dissipation, ensuring optimal performance even in high-temperature environments. Additionally, its independent Driver scheme contributes to its stability, delivering a more reliable lighting experience. Whether for gardens, patios, or commercial areas, this LED floodlight is a great choice for any outdoor space.

Dimension

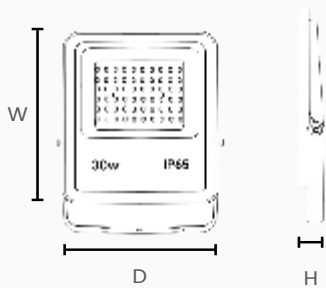


Rated Power	30W
D-W-H (mm)	185*220*32mm
Rated Power	50W
D-W-H (mm)	200*253*45mm
Rated Power	100W
D-W-H (mm)	240*290*45mm
Rated Power	150W
D-W-H (mm)	290*345*50mm
Rated Power	200W
D-W-H (mm)	320*380*50mm


INSTALLATION STEPS

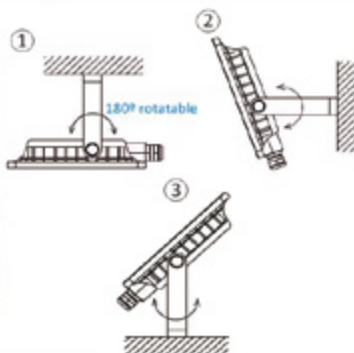


Technical Details




Basic Details

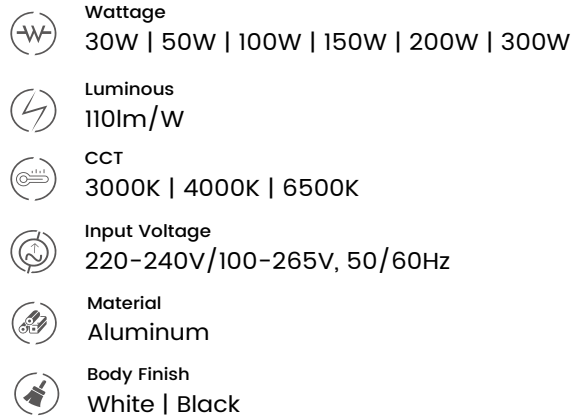

Mounting Information



Light Distribution

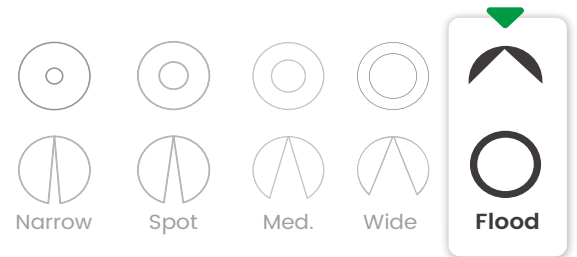


Porch Wall Mount Exterior Led Lamp



Product Description

This outdoor wall lamp boasts a sophisticated design and practical versatility. It is notable for its compatibility with both E27 and GU10 bulb bases, allowing for a diverse range of lighting options. Whether you're aiming for a cozy, inviting atmosphere or a bright, functional space, this wall lamp can accommodate your preferences with ease.

Dimension

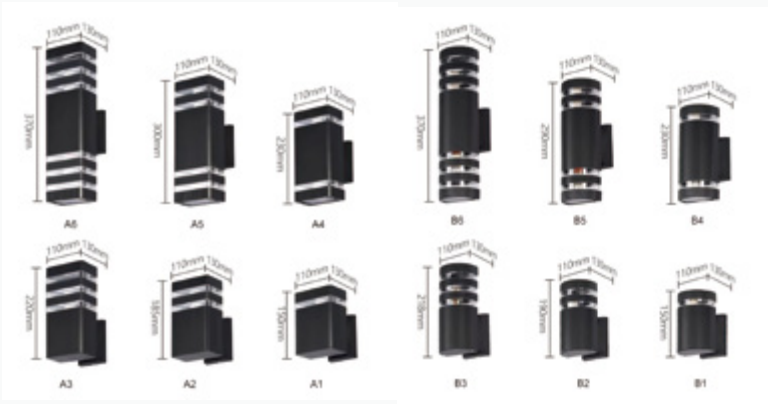

INSTALLATION STEPS



Technical Details

 IP54


 RoHS

 CB


 CE

 30,000 Hrs | LM80 | B10


Basic Details

 Wattage


From Bulb

 Luminous efficiency


From Bulb

 Material

Aluminum+PVC

 Body Finish


White | Black | Grey


 Base


E27 | GU10 lamp holder





Mounting Information

 Recessed

 Suspended


 Surface


 Track


 Self Adhesive Double Sided Tape


Light Distribution

 Narrow

 Spot

 Med.

 Wide

 Flood




Thin square waterproof wall lamp




Product Description

This minimalist wall lamp, available in aluminum (for a premium look) or plastic (for economy), features a sleek rectangular design and emits a soft glow. Its modern aesthetic is perfect for a variety of settings.

Dimension

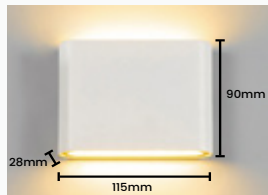

Small

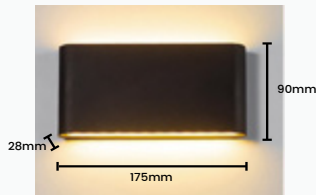

Large

INSTALLATION STEPS



1. Turn the two screws on the left and right to separate the outer frame from the light body.



2. Drill holes, insert plastic plugs, and secure the baseplate to the wall.



3. Connect wires, test light.



4. Slide lamp body onto baseplate.



5. Fit lamp, tighten screws.




6. Installation complete.


Technical Details




Basic Details

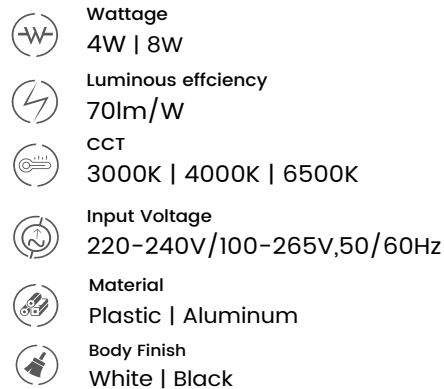


Mounting Information



Light Distribution

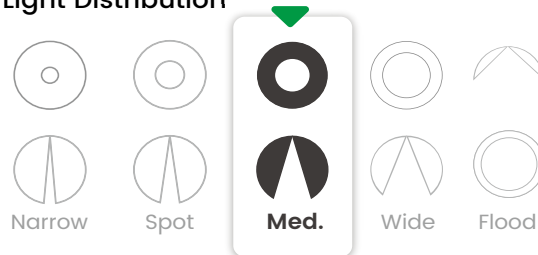

Optional selection--Add IR Sensor

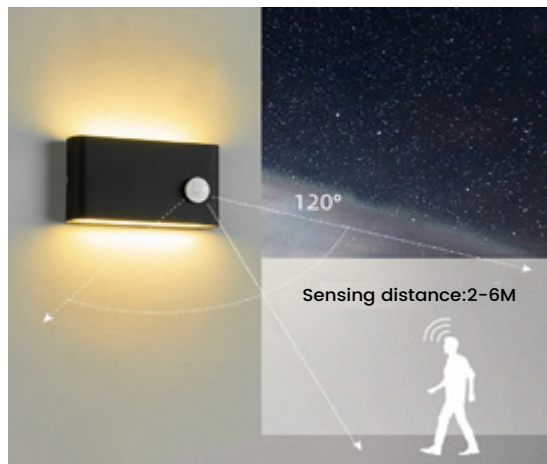

Minimalist waterproof wall lamp



Product Description

This minimalist wall light features a sleek design with round and square options. Available in plastic (cost-effective) and aluminum (premium feel) versions, it produces soft light and is waterproof for added durability.

Dimension



TYPE:A

Rated Power 6W 12W
D-H (mm) 110*88 170*88



TYPE:C

Rated Power 6W 12W
D-H (mm) 110*88 170*88



TYPE:E

Rated Power 6W 12W
D-H (mm) 110*88 170*88



TYPE:G

Rated Power 6W 12W
D-H (mm) 110*88 170*88



TYPE:B

Rated Power 6W 12W
D-H-W (mm) 110*110*88 170*170*88



TYPE:D

Rated Power 6W 12W
D-H-W (mm) 110*110*88 170*170*88



TYPE:F

Rated Power 6W 12W
D-H-W (mm) 110*110*88 170*170*88



TYPE:H

Rated Power 6W 12W
D-H-W (mm) 110*110*88 170*170*88



TYPE:I

Rated Power 6W
D-H-W (mm) 160*100*75



TYPE:I-2

Rated Power 12W
D-H-W (mm) 160*130*75



TYPE:J

Rated Power 6W
D-H-W (mm) 160*100*75



TYPE:J-2

Rated Power 12W
D-H-W (mm) 160*130*75

Technical Details

IP54 RoHS CB CE

30,000 Hrs | LM80 | B10

Basic Details

- Wattage
6W | 12W
- Luminous efficiency
90lm/W (Without cover)
- CCT
3000K | 4000K | 6500K
- Input Voltage
220-240V/100-265V,50/60Hz
- Material
Plastic | Aluminum
- Body Finish
White | Black

Mounting Information

- Recessed
- Suspended
- Surface
- Track
- Self Adhesive Double Sided Tape

INSTALLATION STEPS



1.Connect the power cable



2.Secure the lamp body using screws.



3.Attach the outer shell to the lamp body.



4.Use a wrench to tighten the screws.



Product Description

This minimalist wall light features a sleek design with round and square options. Available in plastic (cost-effective) and aluminum (premium feel) versions, it produces soft light and is waterproof for added durability.

Dimension

TYPE:A

Rated Power	8W
D-H-W (mm)	300*80*40
Rated Power	16W
D-H-W (mm)	600*80*40
Rated Power	22W
D-H-W (mm)	800*80*40
Rated Power	28W
D-H-W (mm)	1000*80*40
Rated Power	30W
D-H-W (mm)	1200*80*40
Rated Power	36W
D-H-W (mm)	1500*80*40
Rated Power	48W
D-H-W (mm)	2000*80*40

TYPE:B

Rated Power	8W
D-H-W (mm)	300*80*40
Rated Power	16W
D-H-W (mm)	600*80*40
Rated Power	22W
D-H-W (mm)	800*80*40
Rated Power	28W
D-H-W (mm)	1000*80*40
Rated Power	30W
D-H-W (mm)	1200*80*40
Rated Power	36W
D-H-W (mm)	1500*80*40
Rated Power	48W
D-H-W (mm)	2000*80*40

TYPE:C

Rated Power	8W
D-H-W (mm)	300*80*40
Rated Power	16W
D-H-W (mm)	600*80*40
Rated Power	22W
D-H-W (mm)	800*80*40
Rated Power	28W
D-H-W (mm)	1000*80*40
Rated Power	30W
D-H-W (mm)	1200*80*40
Rated Power	36W
D-H-W (mm)	1500*80*40
Rated Power	48W
D-H-W (mm)	2000*80*40

Technical Details

 IP54


 RoHS


 CB


 CE


 30,000 Hrs | LM80 | B10


Basic Details


 **Wattage**
8W | 16W | 22W | 28W | 30W | 36W | 48W


 **Luminous efficiency**
90lm/W

 **CCT**
3000K | 4000K | 6500K


 **Input Voltage**
100-265V,50/60Hz


 **Material**
Iron+acrylic


 **Body Finish**
White | Black | Gold

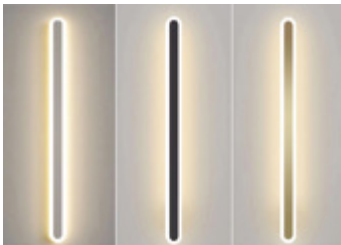



Mounting Information

 Recessed


 Suspended

 Surface


 Track

 Self Adhesive
Double Sided Tape


INSTALLATION STEPS




1. Secure the base plate using screws.




2. Connect the reserved wires to the wires of the lamp body.




3. After the connection is completed, align and place the lamp body onto the base plate.



4. Use a screwdriver to align with the screws on both sides of the lamp body and rotate to secure it in place.





Wall light--Touch switch control




Product Description

The wall lamps feature a sleek and minimalist design in black and white hues, available in both circular and rectangular shapes. They boast a unique touch-controlled functionality, allowing for effortless switching on and off. The illuminated circular or rectangular areas emit a soft glow, adding a touch of "Simple charm" to any modern interior.

Dimension



Rated Power	7W
D-H (mm)	Φ120 *40
Rated Power	10W
D-H (mm)	Φ200 *40
Rated Power	17W
D-H (mm)	Φ300 *40



Rated Power	7W
D-H (mm)	120 *40
Rated Power	10W
D-H (mm)	200 *40
Rated Power	17W
D-H (mm)	300 *40




Technical Details



Basic Details




Mounting Information




Optional selection

CCT adjustable by turning on and off



INSTALLATION STEPS

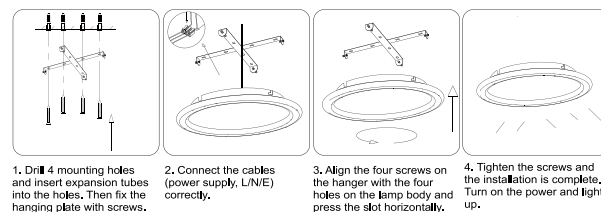


LED Marble&Iron Wall Lamp




Product Description

This modern wall lamp, crafted from metal, offers a sleek and sophisticated design. With its warm yellow or soothing white light, it enhances the ambiance of any room, blending seamlessly into various decors. Perfect for both style and function, it adds a touch of luxury to any home.

Dimension

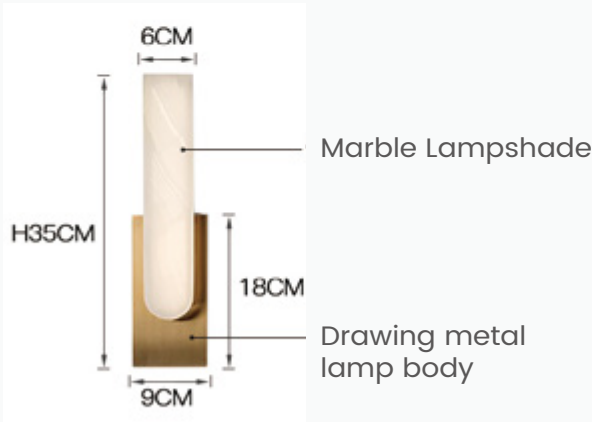

Mounting Information




Light Distribution



Technical Details



Basic Details

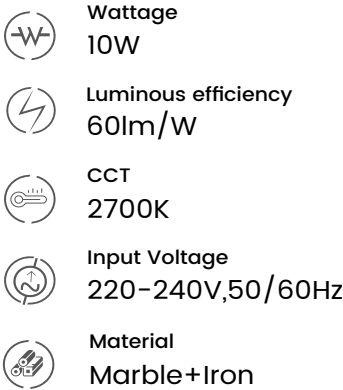


Lampshade made of marble

Made of marble,the texture is delicate, simple and elegant, and the transmitted light is soft and warm.

The lamp body adopts the preferred hardware material.

The hardware is preferred, and the paint process gives the details a simple, elegant, high-end fashion temperament.

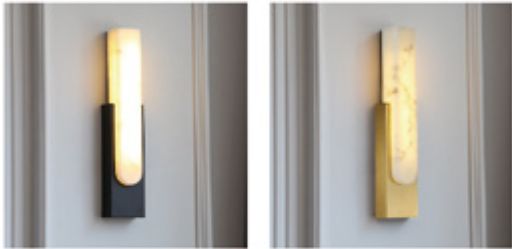

Black Gold




Gray Green White



Product Description

The garden lamp is a striking fixture, boasting a retro yet elegant design. Its deep brown hue adds a touch of warmth and sophistication to any urban landscape. Standing gracefully on a broad city street, it provides a welcoming glow that complements the surrounding buildings, one adorned with intricate carvings and windows. The lamp's soft illumination creates a calming ambiance, ideal for a relaxing evening stroll or a quiet moment of reflection. As a timeless piece of outdoor lighting, it is not just a source of illumination but also an aesthetic enhancement, enhancing the beauty of any garden or cityscape.


Dimension



Rated Power 30-60W
D-W-H (mm) $\phi 560 \times 380 \text{mm}$

SUGGESTED INSTALLATION HEIGHT

Indirect lighting and a curved slope design of the lampshade allow luminaires to be installed on 3-6 meter poles, but humans will not see the brightest point in the middle, which creates a human-friendly and soft lighting performance.

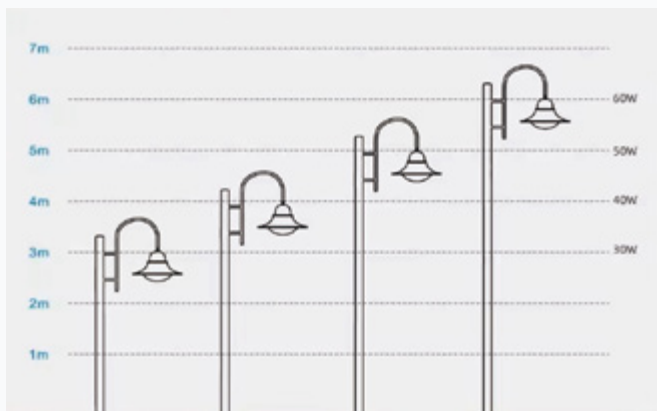


Technical Details

IP65 RoHS CB CE CRI \geq 70
30,000 Hrs | LM80 | B10


Basic Details

Wattage 30-60W
Luminous 100lm/W
CCT 3000K | 4000K | 6500K
Input Voltage 100-265V, 50/60Hz
Material Die-casting aluminum and PC
Body Finish Black

Mounting Information



Light Distribution

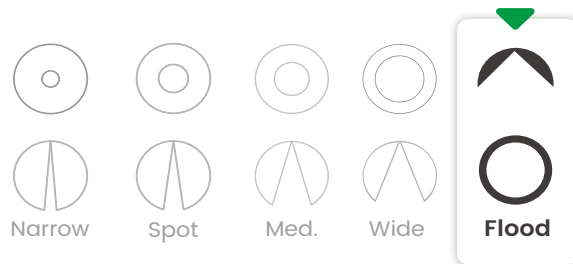




Product Description

This sleek street light boasts exceptional cost-effectiveness, combining high brightness with an energy-efficient design. Its sleek gray finish and LED technology ensure optimal illumination for various outdoor environments

Dimension

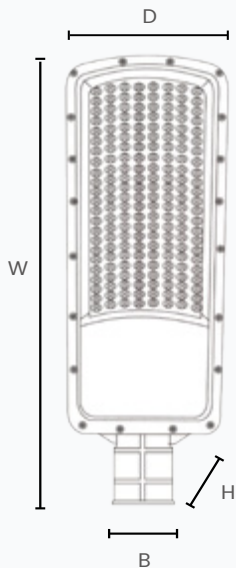

Rated Power	50W
D-W-H-B (mm)	125*392*63*54mm
Rated Power	100W
D-W-H-B (mm)	145*455*71*60mm
Rated Power	150W
D-W-H-B (mm)	176*529*75*60mm
Rated Power	200W
D-W-H-B (mm)	197*602*75*60mm
Rated Power	300W
D-W-H-B (mm)	223*696*75*60mm

Installation Diagram

It can be installed horizontally and vertically as shown in the picture. Wide adjustable angles: from -0° to + 90°.

1. Install the lamp to the pole and tighten the screws
2. Loosen the connecting rod converter screws and adjust the angles.
3. Tighten the connecting rod converter screws



Adjustable angle



Non-adjustable angle



Adjustable angle

Technical Details


IP65 RoHS CB CE CRI≥80

30,000 Hrs | LM80 | B10


Basic Details

- Wattage**
50W | 100W | 150W | 200W | 300W
- Luminous**
100lm/W | 180lm/W
- CCT**
3000K | 4000K | 6500K
- Input Voltage**
220-240V/100-265V, 50/60Hz
- Material**
Die-casting Aluminum
- Body Finish**
Grey | Black

Mounting Information




Light Distribution

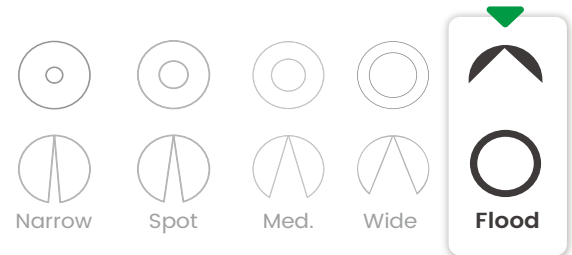


Optional selection


Adjustable angle/Non-adjustable angle.

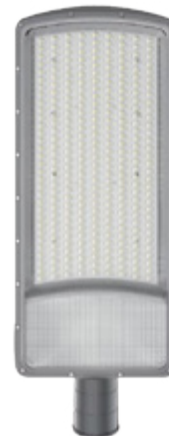

Non-adjustable angle

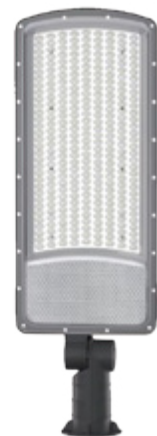


Adjustable angle

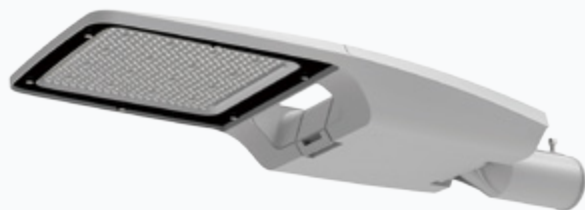


Product Description

- Smooth appearance and line design.-Up to 100,000hrs @ L70, low maintenance cost.
- It can be installed horizontally and vertically and the adjustable angle is $\pm 15^\circ$.
- The protection grade is IP66 and IK08-Tool-less opening of driver box, ease of maintenance.
- ADC12 high-pressure cast aluminum one-piece shell great help for heat dissipation.
- High strength tempered glass lampshade with stronger light transmission performance.
- The hollow design is adopted between the light source and the drive room to improve their flow rate and heat dissipation capacity.
- Type I// ω //V light distribution can meet the different requirements of road lighting.
- Strobe-free stable optical output, power factor 0.95 Maintain the stability of the power grid.

Dimension

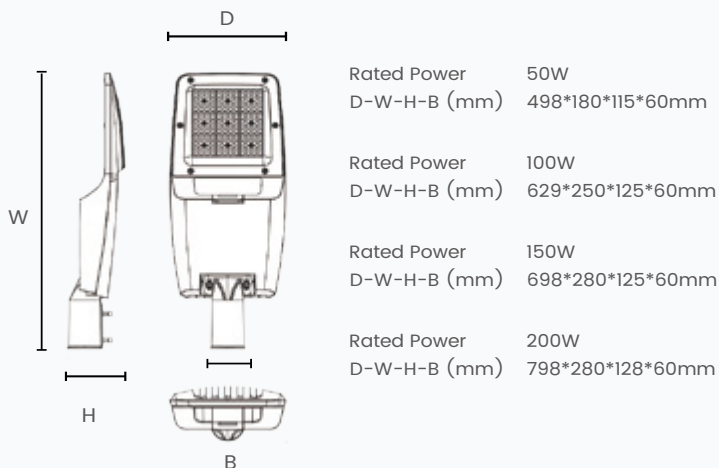

Installation Diagram

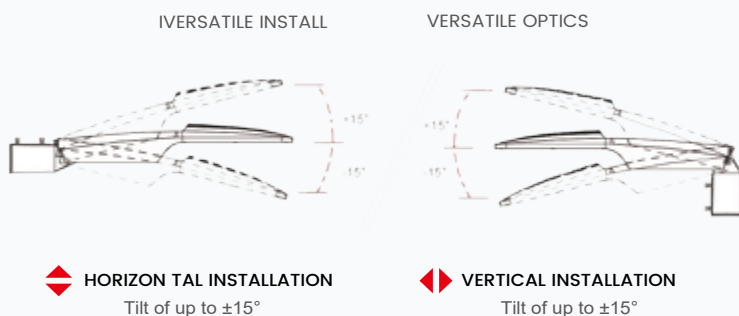


Technical Details




Basic Details

- Wattage**
50W | 100W | 150W | 200W
- Luminous**
100lm/W | 180lm/W
- CCT**
3000K | 4000K | 6500K
- Input Voltage**
220-240V/100-265V, 50/60Hz
- Material**
Die-casting Aluminum
- Body Finish**
Grey | Black | White

Light Distribution

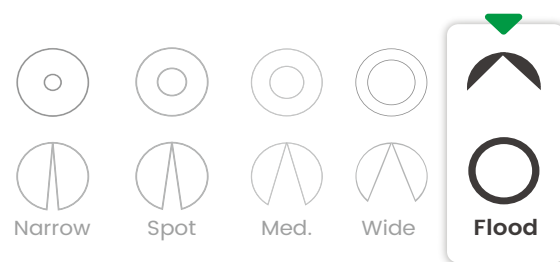

Details

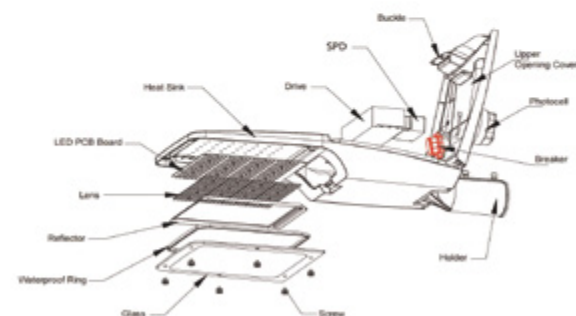

SOLAR ENERGY

Aladdin founded in 1995

Rechargeable flood light



Product Description

Mains charging and solar-powered versions, it meets various outdoor needs. Mains charging model unaffected by rainy days, it provides a reliable source of bright illumination for outdoor use. Versatile and portable, it's your ideal lighting solution.. The solar-powered version converts sunlight into electricity, providing a sustainable lighting option. Both models are portable and perfect for construction sites, emergencies, or wherever bright light is needed. Versatile and powerful, this spotlight is your new outdoor lighting solution.



360° free rotation

Can be a bracket and handle, easy to use.



Waterproof switch

Waterproof and dustproof two-stop switch, easy to use.



Die-casting Aluminum

IP65 is waterproof, dustproof and corrosion-proof, weatherproof.

Technical Details



Basic Details



SR100

Solar rechargeable flood light
Material:Aluminum+Glass cover
Solar panels:3W CCT:6500K
Lumen: 700lm
Battery: 3.2v 5000mAh
Working time : 6-10hour
Dimming: Two switches-White light + Red Blue
Size:225*330*60mm



SR200

Solar rechargeable flood light
Material:Aluminum+Glass cover
Solar panels:6W CCT:6500K
Lumen: 1500lm
Battery:7500mAh
Working time : 6-10hour
Dimming: Two switches-White light + Red Blue
Size:270*340*55mm



R50

Rechargeable flood light
Material:Aluminum+Glass cover
CCT:6500K
Lumen: 300lm
Battery:5000mAh
Working time : 6-10hour
Dimming: Two switches-White light + Red Blue
Size: 215*275*47mm



R200

Rechargeable flood light
Material:Aluminum+Glass cover
CCT:6500K
Lumen: 1500lm
Battery:7500mAh
Working time : 6-10hour
Dimming: Two switches-White light + Red Blue
Size:270*340*55mm



R300

Rechargeable flood light
Material:Aluminum+Glass cover
CCT:6500K
Lumen: 2400lm
Battery:15000mAh
Working time : 6-10hour
Dimming: Two switches-White light + Red Blue
Size:300*360*65mm

NEW



R507

Rechargeable flood light (USB charging)
Material:Aluminum+Glass cover
CCT:5000K
Lumen: 3000lm
Battery:4400mAh
Working time : 2hour
USB port: 5V 0.2A
Size:242*203*130mm




Product Description

This solar floodlight offers easy assembly and features an adjustable solar panel for optimal sunlight absorption. Boasting a bright LED light strip, it promises a powerful and illuminating performance. Perfect for various outdoor lighting needs, its adjustable angle allows for precise directional lighting. A convenient and energy-efficient choice for any space.


Dimension




Light Distribution

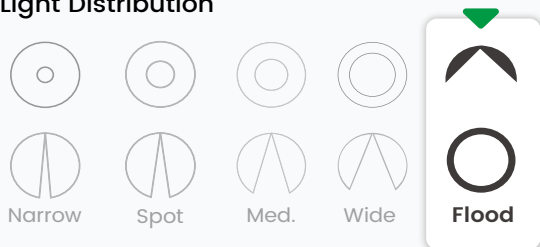






Mounting Information

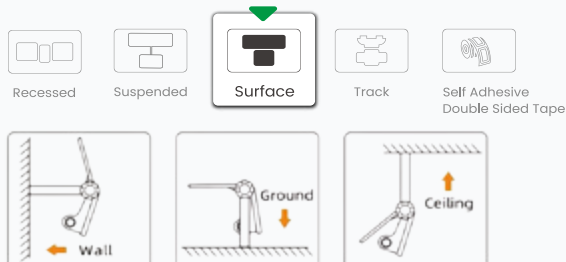


Technical Details



Basic Details

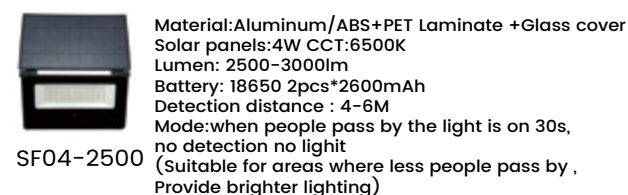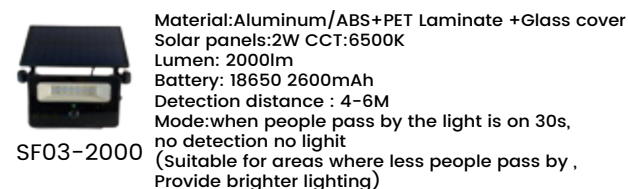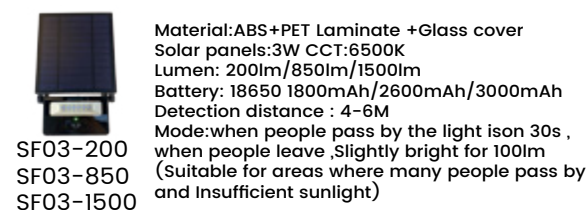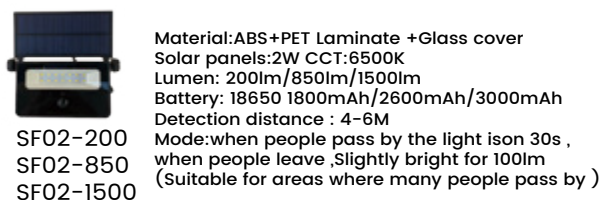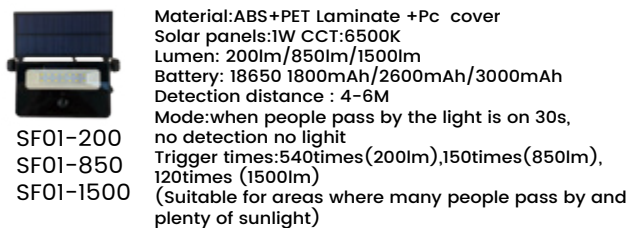

Installation method

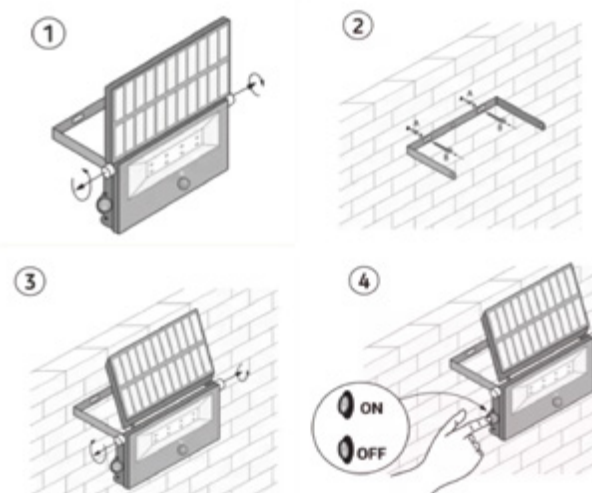



Product Description

This LED Solar Street Light is very cost-effective, boasting features such as human body sensing and remote control. With three flexible installation options, they can be mounted on walls, poles, or brackets. Each fixture emits a warm yellow glow from its LED bulbs, providing effective illumination. The human body sensing feature ensures automatic lighting when needed, while the remote control allows for convenient adjustment of brightness and working hours, further enhancing their practicality and energy efficiency.

Multiple installation methods



Technical Details



Basic Details



SYL15

Solar Street Light
Material: Aluminum
Solar panels: 15w
Color temperature: 6500K
Lumen: 2000lm
Battery: 3.2v 10000mAh
Charging time: 4-6hour
Working time : 12hour
Size: 573*200*90mm
Lighting method: infrared sensor + segmented time control + intelligent control



SYL15

Solar Street Light
Material: Aluminum
Solar panels: 15w
Color temperature: 6500K
Lumen: 3000lm
Battery: 3.2v 15000mAh
Charging time: 4-6hour
Working time : 12hour
Size: 753*200*90mm
Lighting method: infrared sensor + segmented time control + intelligent control



SYL30

Solar Street Light
Material: Aluminum
Solar panels: 30w
Color temperature: 6500K
Lumen: 4000lm
Battery: 3.2v 25000mAh
Charging time: 4-6hour
Working time : 12hour
Size: 1055*200*90mm
Lighting method: infrared sensor + segmented time control + intelligent control

Remote Control



Sensor Control



LED Solar Camping Light



Product Description

Designed for convenience, it offers detachable lighting for flexible use and solar charging for eco-friendly power. Easily switch between various ambient colors to set the perfect mood. With USB charging capability, it also doubles as a power bank to keep your devices charged. Compact, reliable, and versatile, it's the perfect companion for all your outdoor adventures.

Multiple Functions



Detachable Double lights



Portable Flashlight



Multi -color light source




Solar Charging /
Phone Charging

Basic Details



SCA

Material:ABS, PP
Solar panels: 0.27W
Color temperature:3000K
Lumen: 300lm
Battery: 2*1200mAh
Charging time: 4hour
Charging Port:Type-c
Working time : 4hour
(Low Light for 8 Hours)
K1 Strong Light - Low Light - Off.
K2 Multicolor Single Color - Off
(Long press for multicolor cycle - color change every 2 seconds)



SCA-1

Flashlight
Material:ABS, PP
Color temperature:6500K
Lumen: Side Light 140lm
XPE 75lm
Battery: 1*800mAh
Charging time: 4hour
Charging Port:Type-c
Working time : 3.5hour (Side Light)
(XPE for 4.5 Hours)
Strong Light - Low Light - XPE - Off



SCB
(Non-removable)

Material:ABS, PP
Solar panels: 0.27W
Color temperature:3000K
Lumen: 300lm
Battery: 2*1200mAh
Charging time: 4hour
Charging Port:Type-c
Working time : 4hour
(Low Light for 8 Hours)
K1 Strong Light - Low Light - Off.
K2 Multicolor Single Color - Off
(Long press for multicolor cycle - color change every 2 seconds)



SCC

Material:ABS, PP
Solar panels: 0.27W
Color temperature:3000K
Lumen: 300lm
Battery: 2*1200mAh
Charging time: 4hour
Charging Port:Type-c
Working time : 4hour
(Low Light for 8 Hours)
K1 Strong Light - Low Light - Off.
K2 Multicolor Single Color - Off
(Long press for multicolor cycle - color change every 2 seconds)



SCC-1

Flashlight
Material:ABS, PP
Color temperature:6500K
Lumen: Side Light 20lm
XPE 75lm
Battery: 1*400mAh
Charging time: 4hour
Charging Port:Type-c
Working time : 4hour (Side Light)
(XPE for 4 Hours)
Front Light: Strong Light - Low Light - Strobe - Side Light On - Off

COB Light Core

Wide Range Illumination

Light Switch

Long Range- Strong Floodlight
-Floodlight Strobe

XPE Light Core

Focused Long Range Illumination




LED Solar Highbay Light




Product Description

- ✓ **Dual Mounting Options** – Can be hung from ceilings or wall-mounted, offering flexible installation for warehouses, garages, barns, and outdoor areas.
- ✓ **Adjustable Color Temperature (3000K-6500K)** – Remote control allows easy switching between warm white, neutral, and cool white light for different needs.
- ✓ **Smart Auto Sensors** – Equipped with motion detection (PIR) and When the solar panels stop absorbing sunlight, the lights will turn on.
- ✓ **Dual Charging Modes** – Powered by solar panels (eco-friendly) or AC plug-in (backup charging), ensuring uninterrupted operation.
- ✓ **Energy-Efficient & Long-Lasting** – High-lumen LED chips provide bright illumination while saving power, with a lifespan of 30,000+ hours.

Dimension

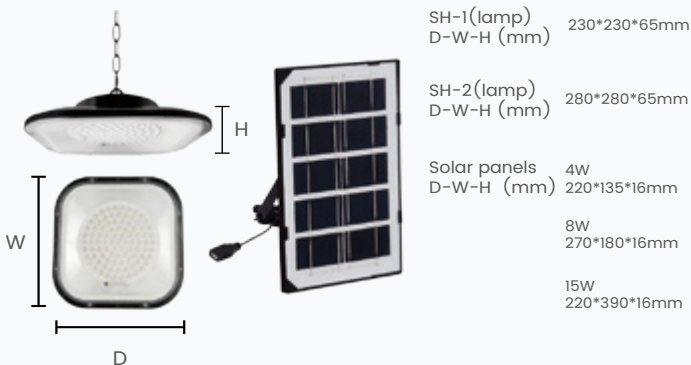

Technical Details



Basic Details


- Solar panels**
4W | 8W | 15W
- Material**
ABS, PC
- CCT**
Three Color Dimming






- Lumen**
650lm | 1150lm | 1600lm
- Battery: 3500/5000/10000mAh**
Charging time: 2.5/3.5/7.5hour
Working time : 8hour
- Product function**
Optical control+Remote control



Mounting Information



Light Distribution

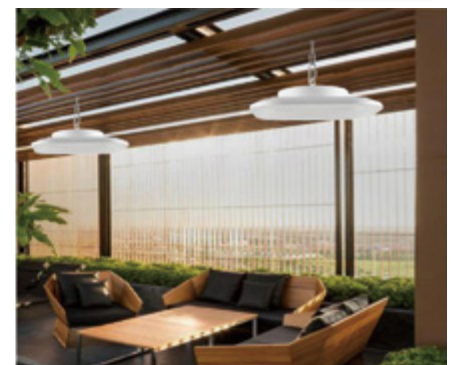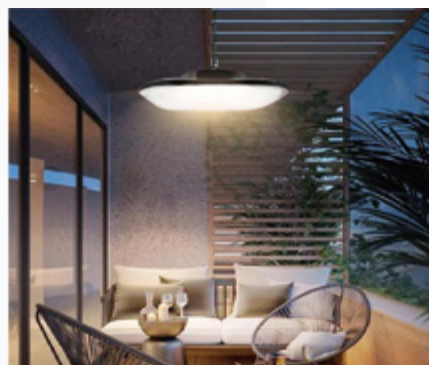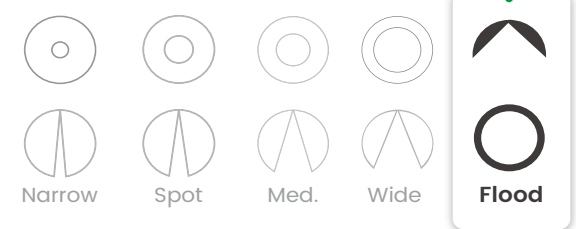

LED Solar Courtyard Wall Light




Product Description

Enhance your outdoor space with our solar-powered courtyard wall light, featuring an energy-efficient LED filament bulb for a warm, vintage-inspired glow. Designed for longer runtime and quick charging, its detachable solar panel ensures optimal sunlight absorption.

Key Features:

- ✓ High-efficiency LED filament bulb – Bright yet energy-saving
- ✓ Extended battery life – Illuminates longer after a full charge
- ✓ Classic retro design – Elegant aesthetics for any garden or patio
- ✓ Independent solar panel – Adjustable for faster charging
- ✓ Weather-resistant – Durable for year-round use

Basic Details

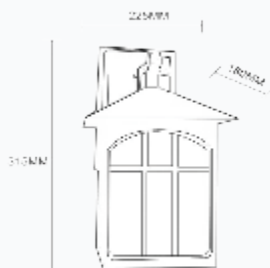

SCW01

Material:Aluminium
Solar panels: 8W
Color temperature: From bulb
Lumen: 280lm
Battery: 5000mAH
Charging time: 8hour
Working time : 12hour
IP Rating : IP65





Built-in high-efficiency LED filament light source, offering longer-lasting performance and a more retro aesthetic appeal.

More types



SCW02

Material:Aluminium
Solar panels: 8W
Color temperature: From bulb
Lumen: 280lm
Battery: 5000mAH
Charging time: 8hour
Working time : 12hour
IP Rating : IP65

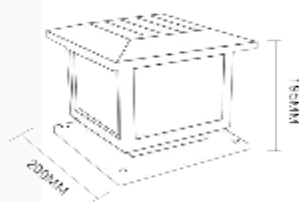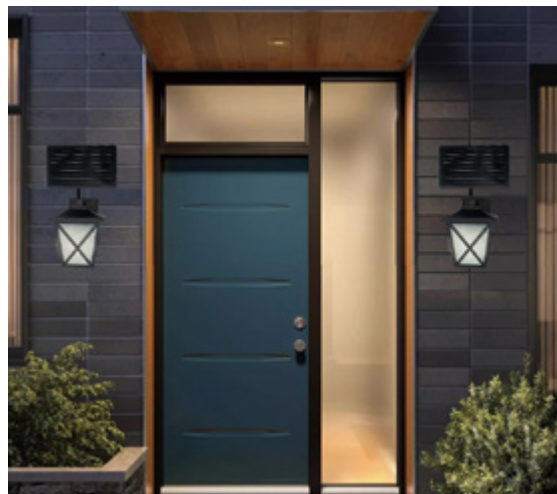

SCW03

Material: ABS
Solar panels: 5W
Lumen: 280lm
Battery: 5000mAH
Charging time: 8hour
Working time : 12hour
IP Rating : IP65
Color temperature: 3000K/
4000K/
6500K



COMMERCIAL LIGHTING

Aladdin founded in 1995

Magic series magnetic light



Product Description

LED magnetic track lights are versatile and adjustable fixtures that magnetically attach to a track system. They offer easy installation, disassembly, and relocation, allowing for convenient adjustment of lighting angle and position. With a range of power specifications, brightness, and color temperature options, they provide both functional and decorative benefits for indoor spaces.



折叠泛光灯/Folding floodlight

产品细节/Product Details





正面/Facade 正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-ZF6W	6w	3000K/4000K/6000K	26x9x120mm	> 90	塑料 铝/PC AL
MG-ZF12W	12w	3000K/4000K/6000K	26x9x235mm	> 90	塑料 铝/PC AL



折叠格栅灯/Folding grille light

产品细节/Product Details






正面/Facade 正面/Facade 正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-ZG6W	6w	3000K/4000K/6000K	26x9x120mm	> 90	塑料 铝/PC AL
MG-ZG12W	12w	3000K/4000K/6000K	26x9x235mm	> 90	塑料 铝/PC AL



折叠蜂窝格栅灯/Folding honeycomb grille light

产品细节/Product Details






正面/Facade 正面/Facade 正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-ZGF6W	6w	3000K/4000K/6000K	26x9x120mm	> 90	塑料 铝/PC AL
MG-ZGF12W	12w	3000K/4000K/6000K	26x9x235mm	> 90	塑料 铝/PC AL



泛光灯/Floodlight

产品细节/Product Details




正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-F6W	6w	3000K/4000K/6000K	26x26x120mm	> 90	塑料 铝/PC AL
MG-F12W	12w	3000K/4000K/6000K	26x26x235mm	> 90	塑料 铝/PC AL



泛光灯/Floodlight

产品细节/Product Details




正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-F18W	18w	3000K/4000K/6000K	26x30x450mm	> 90	塑料 铝/PC AL



格栅灯/Grille light

产品细节/Product Details




正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-G6W	6w	3000K/4000K/6000K	26x26x120mm	> 90	塑料 铝/PC AL
MG-G12W	12w	3000K/4000K/6000K	26x26x235mm	> 90	塑料 铝/PC AL



格栅灯/Grille light

产品细节/Product Details




正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-G18W	18w	3000K/4000K/6000K	26x30x450mm	> 90	塑料 铝/PC AL



蜂窝格栅灯/Honeycomb grille light

产品细节/Product Details




正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-GF6W	6w	3000K/4000K/6000K	26x26x120mm	> 90	塑料 铝/PC AL
MG-GF12W	12w	3000K/4000K/6000K	26x26x235mm	> 90	塑料 铝/PC AL



6w轨道射灯/ 6wTrack light

产品细节/Product Details




正面/Facade 正面/Facade

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-S6W	6w	3000K/4000K/6000K	Φ27x118mm	> 90	塑料 铝/PC AL



轨道射灯/ Track light

产品细节/Product Details




正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-S10W	10w	3000K/4000K/6000K	Φ45x100mm	> 90	塑料 铝/PC AL
MG-S20W	20w	3000K/4000K/6000K	Φ55x140mm	> 90	塑料 铝/PC AL



双头轨道射灯/Double track light


产品细节/Product Details




正面/Facade 背面/Back



产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-S10W2	10w*2	3000K/4000K/6000K	Φ45x100mm*2	> 90	塑料 铝/PC AL



吊灯 B / Suspension light B

产品细节/Product Details

正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-DB7W	7w	3000K/4000K/6000K	Φ65x75mm	> 90	塑料 铝/PC AL



吊灯 C / Suspension light C

产品细节/Product Details




正面/Facade 背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-DC9W	9w	3000K/4000K/6000K	Φ65x70mm	> 90	塑料 铝/PC AL



吊线灯 D/ Suspension light D

产品细节/Product Details



正面/Facade

背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-DD8W	8w	3000K/4000K/6000K	Φ42x280mm	> 90	塑料 铝/PC AL



吊线灯 F/ Suspension light F

产品细节/Product Details



正面/Facade

背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-DF10W	10w	3000K/4000K/6000K	Φ100mm	> 90	塑料 铝/PC AL



吊线灯 G/ Suspension light G

产品细节/Product Details



正面/Facade

背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-DG8W	8w	3000K/4000K/6000K	Φ54x120mm	> 90	塑料 铝/PC AL



吊线灯/Pendant light

产品细节/Product Details



正面/Facade

背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-DBW	8w	3000K/4000K/6000K	Φ30x300mm	> 90	塑料 铝/PC AL



彩瓷吊线灯/Colorful spot light

产品细节/Product Details



正面/Facade

背面/Back


产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-CC10W	10w	3000K/4000K/6000K	Φ70x20mm	> 90	塑料 铝/PC AL



魔球射灯/Colorful pendant light

产品细节/Product Details




正面/Facade

背面/Back

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-MQ5W	5w	3000K/4000K/6000K	Φ50x35mm	> 90	塑料 铝/PC AL



京瓷壁灯/Wall lamp

产品细节/Product Details



正面/Facade

正面/Facade

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-JC12W	12w	3000K/4000K/6000K	Φ165x38mm	> 90	塑料 铝/PC AL



磁吸夕阳灯/Sunset light

产品细节/Product Details



正面/Facade

背面/Back

光效/Efficacy


产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-Sun10w	10w	3000K/4000K/6000K	Φ72x40mm	> 90	塑料 铝/PC AL



磁吸切光灯/ Shapeable and Zoomable light

产品细节/Product Details



背面/Back

光效/Efficacy

光效/Efficacy

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-VG10W	10w	3000K/4000K/6000K	Φ44x153.5mm	> 95	塑料 铝/PC AL



磁吸灯管/ Tube light

产品细节/Product Details



光效/Efficacy

产品详细参数/Product specification

型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-DG10W	10w	3000K/4000K/6000K	Φ26x300mm	> 90	塑料 铝/PC AL
MG-DG20W	20w	3000K/4000K/6000K	Φ26x600mm	> 90	塑料 铝/PC AL



磁吸软管/ Hose light


产品细节/Product Details



光效/Efficacy

产品详细参数/Product specification


型号/Model	功率/Power	色温/CCT	尺寸/Size	显指/Ra	材质/Material
MG-RG10W	10w	3000K/4000K/6000K	Φ22x1000mm	> 90	塑料 铝/PC AL
MG-RG20W	20w	3000K/4000K/6000K	Φ22x2000mm	> 90	塑料 铝/PC AL



超薄轨道/ Ultra-thin Rail

产品详细参数/Product specification


型号/Model	尺寸/Size	材质/Material
GF-TQ26-CB	26x6mm	铝 铁 铜/ AL Iron Copper



暗装轨道/ Concealed Rail

产品详细参数/Product specification

型号/Model	尺寸/Size	材质/Material
GF-TQ26-A	63x33.2mm	铝 铁 铜/ AL Iron Copper



防开裂暗装轨道/ Anti cracking concealed Rail

产品详细参数/Product specification

型号/Model	尺寸/Size	材质/Material
GF-TQ26-F	63x33.2mm	铝 铁 铜/ AL Iron Copper



防开裂批灰轨道/ Anti cracking batch gray Rail

产品详细参数/Product specification


型号/Model	尺寸/Size	材质/Material
GF-TQ26-PH	63x33.2mm	铝 铁 铜/ AL Iron Copper



嵌入式轨道/ Recessed Rail

产品详细参数/Product specification

型号/Model	尺寸/Size	材质/Material
GF-TQ26-M	40.4x39mm	铝 铁 铜/ AL Iron Copper



覆膜轨道/ Film covered Rail

产品详细参数/Product specification

型号/Model	尺寸/Size	材质/Material
GF-TQ26-RUC	56.8x42.6mm	铝 铁 铜/ AL Iron Copper



DC48V电源/ Power supply

产品详细参数/Product specification

型号/Model	功率/Power	尺寸/Size	材质/Material
MG-P100W	100W	230x25x23mm	铝 铁 铜/ AL Iron Copper
MG-P200W	200W	270x25x23mm	铝 铁 铜/ AL Iron Copper



超薄导电盒/ Ultra-thin Conductive box

产品详细参数/Product specification

型号/Model	功率/Power	尺寸/Size	材质/Material
MG-Power	-	26x26x120mm	铝 铁 铜/ AL Iron Copper



超薄遮线盒/ Conductive box for power supply

产品详细参数/Product specification

型号/Model	功率/Power	尺寸/Size	材质/Material
MG-Wire box	-	26x26x103mm	铝 铁 铜/ AL Iron Copper

Multi-Head Cob Led Downlight



Product Description

minimalist in design and effortless to install, they offer a comfortable glow and bright illumination. Whether you need a single-head light for focused task lighting or multiple heads for ambient lighting in larger spaces, our downlights provide the perfect solution. Choose the configuration that best suits your needs and enjoy a cozy atmosphere in any setting.

Dimension

	Rated Power	10W
	L-W-H (mm)	117*117*55
	Rated Power	20W
	L-W-H (mm)	117*226*55
	Rated Power	30W
	L-W-H (mm)	117*328*55
	Rated Power	40W
	L-W-H (mm)	226*226*55




Technical Details

IP20	RoHS	CB	CE	CRI≥80	UGR<19
30,000 Hrs LM80 B10					


Basic Details

	Wattage
	10W 20W 30W 40W
	Luminous
	90lm/W
	CCT
	2700K 3000K 4000K 5000K 6500K
	Input Voltage
	220-240V, 50/60Hz
	Material
	Aluminum
	Body Finish
	White Black


Mounting Information



Light Distribution

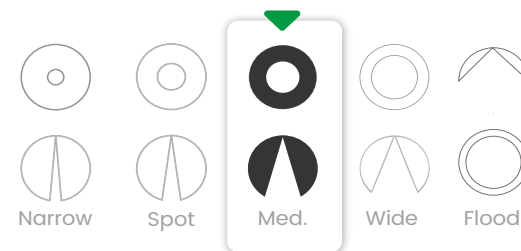

INSTALLATION

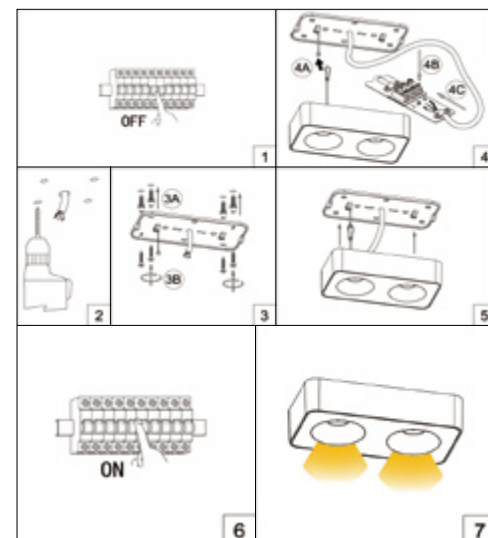

Surface-mounted adjustable angle downlight



Product Description

This collection of ceiling-mounted adjustable downlights features sleek circular shades in various colors and designs. The white shades with black accents and the black shades with subtle holes offer a modern look, suitable for a range of interior settings. The adjustable angle function allows for precise lighting control, enhancing the versatility of these stylish fixtures.

Dimension



Rated Power	5W
D-H (mm)	75*55
Rated Power	7W
D-H (mm)	75*55
Rated Power	10W
D-H (mm)	75*55

INSTALLATION STEPS



1. Install the base-board on the top.


2. Connect the wires

3. Rotate the lamp upwards and tighten it.


Technical Details





Basic Details

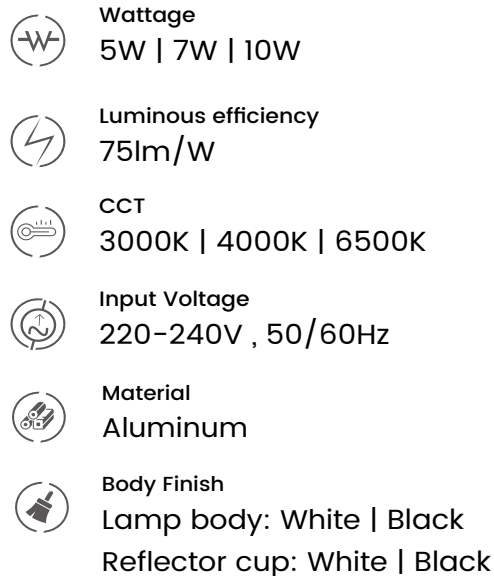

Mounting Information



Light Distribution

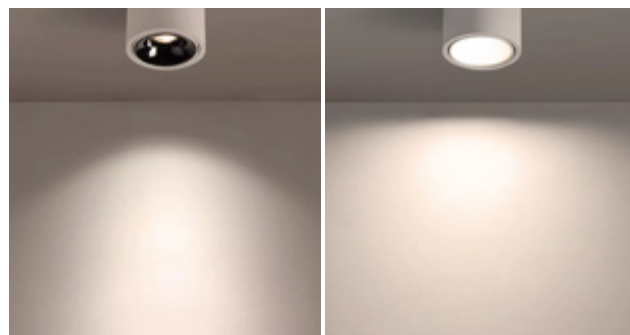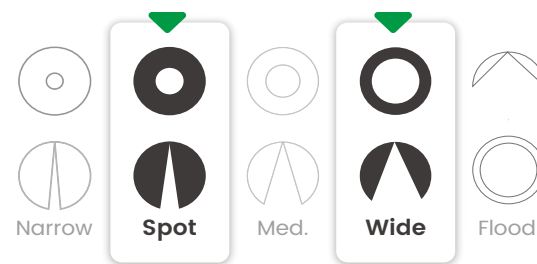

Spot: 38°

Wide: 150°


Surface mounted foldable COB downlight



Product Description

The Surface-Mounted Foldable COB Downlight is a sleek and modern lighting fixture. With its COB technology, it provides efficient and uniform lighting. Its foldable design offers flexibility in installation, making it suitable for various spaces. The adjustable lens allows precise light direction, perfect for various tasks. The white and black variants blend well with any interior, enhancing the overall aesthetic. Long-lasting, energy-efficient, and safe, it's an ideal choice for modern lighting needs.

Dimension

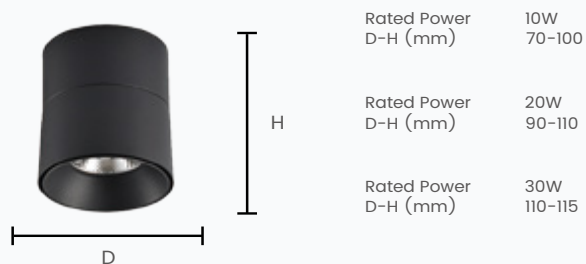


Technical Details




Basic Details



Mounting Information



Light Distribution

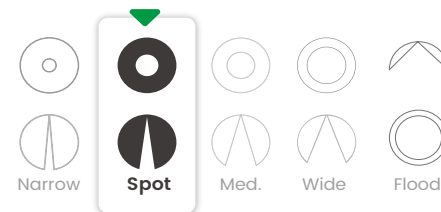

10W Rated Power

Lumen : 800lm Efficacy : 80lm/W CCT : 3000K	Lumen : 900lm Efficacy : 90lm/W CCT : 4000K	Lumen : 900lm Efficacy : 90lm/W CCT : 6000K
---	---	---

20W Rated Power

Lumen : 1600lm Efficacy : 80lm/W CCT : 3000K	Lumen : 1800lm Efficacy : 90lm/W CCT : 4000K	Lumen : 1800lm Efficacy : 90lm/W CCT : 6000K
--	--	--

30W Rated Power

Lumen : 2400lm Efficacy : 80lm/W CCT : 3000K	Lumen : 2700lm Efficacy : 90lm/W CCT : 4000K	Lumen : 2700lm Efficacy : 90lm/W CCT : 6000K
--	--	--

40W Rated Power

Lumen : 3200lm Efficacy : 80lm/W CCT : 3000K	Lumen : 3600lm Efficacy : 90lm/W CCT : 4000K	Lumen : 3600lm Efficacy : 90lm/W CCT : 6000K
--	--	--

Powered by



Power Supply




LED COB down light



Product Description

LED COB downlights are modern, energy-efficient lighting solutions. With a compact design , they offer precise, focused lighting for various spaces. Long-lasting and safe to use, they are a stylish and practical choice for modern interiors.

Dimension

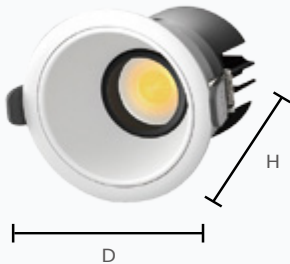

Rated Power	7W	Surface Cutout
D-H (mm)	66-65	Ø55mm
Rated Power	10W	Surface Cutout
D-H (mm)	85-75	Ø75mm
Rated Power	14W	Surface Cutout
D-H (mm)	110-90	Ø95mm

Technical Details

IP44

RoHS

CB

CE

CRI≥85

UGR<19

30,000 Hrs | LM80 | B10

Basic Details

Wattage

7W | 10W | 14W

CCT

3000K | 4000K | 6000K

Input Voltage

220-240V,50/60Hz

Material

Aluminum

Body Finish

White | Black

Mounting Information

Recessed

Suspended

Surface

Track

Self Adhesive Double Sided Tape

Light Distribution

Narrow

Spot

Med.

Wide

Flood

7W Rated Power

Driver Details : 300mA Output Current | 36V Output Voltage

Lumen : 630lm Efficacy : 90lm/w CCT : 3000K	Lumen : 700lm Efficacy : 100lm/w CCT : 4000K	Lumen : 700lm Efficacy : 100lm/w CCT : 6000K
---	--	--

10W Rated Power

Driver Details : 300mA Output Current | 36V Output Voltage

Lumen : 900lm Efficacy : 90lm/w CCT : 3000K	Lumen : 1000lm Efficacy : 100lm/w CCT : 4000K	Lumen : 1000lm Efficacy : 100lm/w CCT : 6000K
---	---	---

14W Rated Power

Driver Details : 300mA Output Current | 36V Output Voltage

Lumen : 1260lm Efficacy : 90lm/w CCT : 3000K	Lumen : 1400lm Efficacy : 100lm/w CCT : 4000K	Lumen : 1400lm Efficacy : 100lm/w CCT : 6000K
--	---	---

Powered by

MLS

BMTC

Smalite

Power Supply

Aladdin


COB die casting LED downlight



Product Description

The COB die casting LED downlight is a high-performance lighting solution that utilizes Chip-on-Board (COB) technology. This advanced technology integrates multiple LED chips onto a single board, resulting in a brighter and more uniform light output. The die casting construction of the downlight ensures excellent heat dissipation, enhancing its durability and lifespan. With its sleek design and superior lighting capabilities, the COB die casting LED downlight is an excellent choice for both home and commercial applications, providing bright and comfortable illumination while being energy-efficient and environmentally friendly.

Dimension

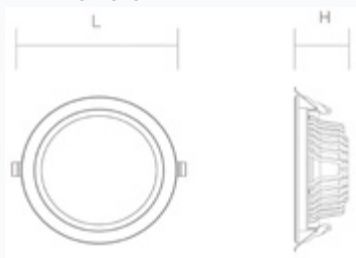

Rated Power	7W	Surface Cutout
L-H (mm)	90*42mm	Ø70mm
Rated Power	10W	Surface Cutout
L-H (mm)	120*42mm	Ø100mm
Rated Power	15W	Surface Cutout
L-H (mm)	165*53mm	Ø145mm
Rated Power	30W	Surface Cutout
L-H (mm)	223*57mm	Ø200mm


Aluminum Heatsink with Excellent Heat Dissipation

Die cast aluminum powder coated with choice of RAL colors.



Anti Glare Design

Low UGR and High Lumen Performance



Stable and High Lumen LED Chips

CRI80 & CRI90 chips with 10 year warranty



Customized LOGO Power Supply

3yrs warranty LED Power Supply with Customized LOGO




Technical Details

IP20	RoHS	CB	CE	CRI≥80
30,000 Hrs	LM80	B10		

Basic Details

Wattage	7W 10W 15W 30W
Luminous efficiency	90lm/W
CCT	3000K 4000K 6500K
Input Voltage	220-240V 165-265V , 50/60Hz
Material	Die-cast aluminum
Body Finish	White


Light Distribution

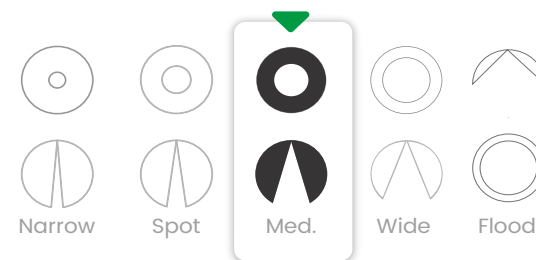

Mounting Information



Optional selection--CCT adjustable

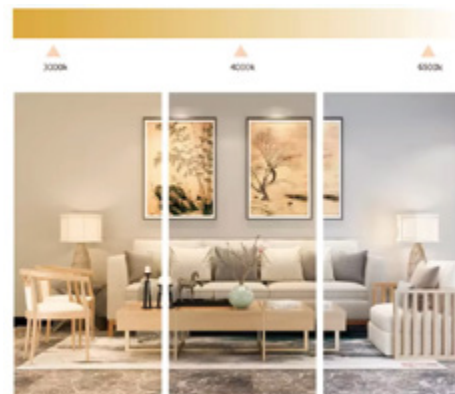

Frameless recessed LED downlight



Product Description

The frameless embedded LED downlight seamlessly blends into any ceiling, offering a sleek and shadow-free illumination. It's energy-efficient, versatile for various settings, and easy to install, making it an ideal modern lighting solution.

Dimension



7W Rated Power

Driver Details : 300mA Output Current | 36V Output Voltage

Lumen : 560lm
Efficacy : 80lm/W
CCT : 3000K

Lumen : 630lm
Efficacy : 90lm/W
CCT : 4000K

Lumen : 630lm
Efficacy : 90lm/W
CCT : 6000K

9W Rated Power

Driver Details : 300mA Output Current | 36V Output Voltage

Lumen : 720lm
Efficacy : 80lm/W
CCT : 3000K

Lumen : 810lm
Efficacy : 90lm/W
CCT : 4000K

Lumen : 810lm
Efficacy : 90lm/W
CCT : 6000K


Technical Details




Basic Details



Mounting Information



Light Distribution

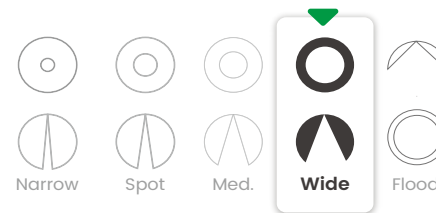

Installation Notes



Powered by



Power Supply




LED die-casting down light



Product Description

The LED office pendant light offers a sleek and modern design, enhancing the brightness and aesthetics of any workspace. Its minimalistic style complements a range of décors, while its bright glow ensures desks and computers are well-lit. The LED technology ensures efficient energy usage and long-lasting performance. Easy to install and maintain, this pendant light is a simple yet powerful addition to modern offices.

Dimension

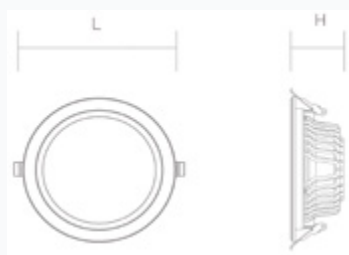

Rated Power	9W	Surface Cutout
L-H (mm)	Ø100*44mm	Ø75-90mm
Rated Power	12W	Surface Cutout
L-H (mm)	Ø120*44mm	Ø90-110mm
Rated Power	15W	Surface Cutout
L-H (mm)	Ø150*45mm	Ø120-140mm
Rated Power	18W	Surface Cutout
L-H (mm)	Ø175*45mm	Ø140-165mm
Rated Power	24W	Surface Cutout
L-H (mm)	Ø197*51mm	Ø160-185mm
Rated Power	36W	Surface Cutout
L-H (mm)	Ø230*55mm	Ø190-220mm

Aluminum Heatsink with Excellent Heat Dissipation

Die cast aluminum powder coated with choice of RAL colors.



Anti Glare Design

Low UGR and High Lumen Performance



Stable and High Lumen LED Chips


CRI80 & CRI90 chips with 10 year warranty



Customized LOGO Power Supply

3yrs warranty LED Power Supply with Customized LOGO

Technical Details



Basic Details

- Wattage**
9W | 12W | 15W | 18W | 24W | 36W
- Luminous efficiency**
90lm/W
- CCT**
3000K | 4000K | 6500K
- Input Voltage**
220-240V | 165-265V , 50/60Hz
- Material**
Die-cast aluminum
- Body Finish**



MATT BK



MATT WH



SHINING BK



UV BK CHROME




SHINING SILVER



UV ROSE GOLD

Light Distribution

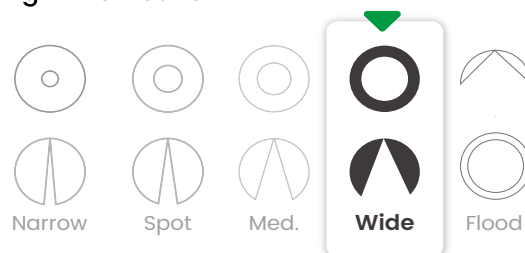


Mounting Information



Optional selection--CCT adjustable



LED DOWNLIGHT FRAME

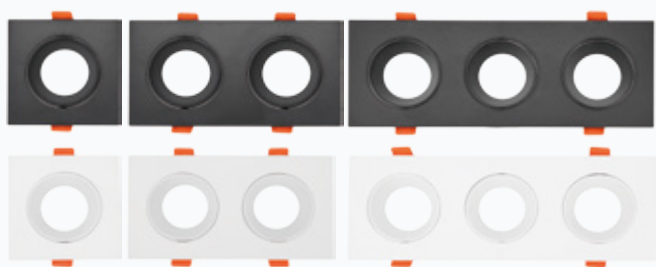

Dimension

	Size	Surface Cutout
A1	90*90mm	75*75mm
A2	170*90mm	155*75mm
A3	250*90mm	235*75mm


Material

PC+PC/Die-Casting
AL+PC

PC+PC/Die-Casting
AL+PC

PC+PC/Die-Casting
AL+PC

Frame+Lamp=Downlight



Dimension


	Size	Surface Cutout
B1	102*102*45mm	90*90mm
B2	102*180*45mm	90*165mm
B3	102*270*45mm	90*255mm

Material

PC+PC

PC+PC

PC+PC




Dimension

	Size	Surface Cutout
C1	85*30mm	Ø75mm

Material

Die-Casting AL+PC

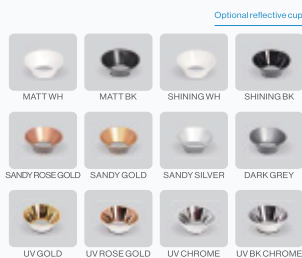

Dimension

	Size	Surface Cutout
E1	88*40mm	Ø78mm

Material


Die-Casting AL+PC

Dimension

	Size	Surface Cutout
D1	81*81*54mm	Ø75mm

Material

Die-Casting AL+PC

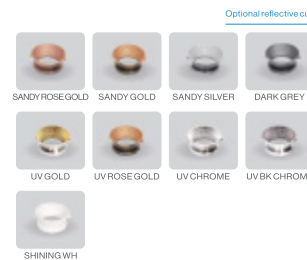

Dimension

	Size	Surface Cutout
F1	92*92*25mm	75*75mm
F2	92*173*25mm	150*75mm
F3	92*249*25mm	230*75mm

Material

PC+PC

PC+PC

PC+PC


Recessed LED Linear Light



Product Description


Our Recessed linear LED lighting fixture is a sleek and modern solution for any interior. Its minimalist design, featuring a pristine white light strip and silver brackets, seamlessly blends into any decor. The energy-efficient LEDs provide ample light while reducing energy consumption. Perfect for highlighting architectural details or everyday tasks, this fixture is a stylish and practical addition to any space.

Dimension

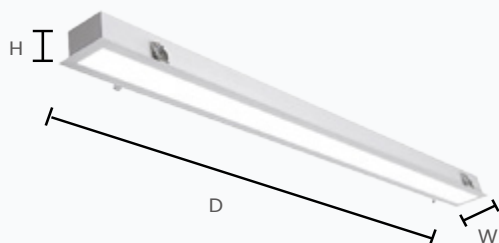


Rated Power	20W	Surface Cutout
D-W-H (mm)	1210*70*60	Ø1195*55mm
Rated Power	24W	Surface Cutout
D-W-H (mm)	1210*80*60	Ø1195*65mm
Rated Power	30W	Surface Cutout
D-W-H (mm)	1210*90*60	Ø1195*75mm
Rated Power	36W	Surface Cutout
D-W-H (mm)	1210*100*60	Ø1195*85mm
Rated Power	40W	Surface Cutout
D-W-H (mm)	1210*120*60	Ø1195*105mm


INSTALLATION STEPS



Connect the power cord with the terminal block and test the light



Open the clip spring installed on the side of the lamp, and insert it from the bottom up into the reserved hole on the ceiling.



Secure the clip spring to the ceiling on both sides of the lamp, insert the acrylic panel, and complete the installation.

Technical Details





Basic Details

Wattage	20W 24W 30W 36W 40W
Luminous	90lm/W
CCT	3000K 4000K 6000K
Input Voltage	220-240V 100-265V, 50/60Hz
Material	PMMA+Aluminum
Body Finish	White Black

Mounting Information



Light Distribution

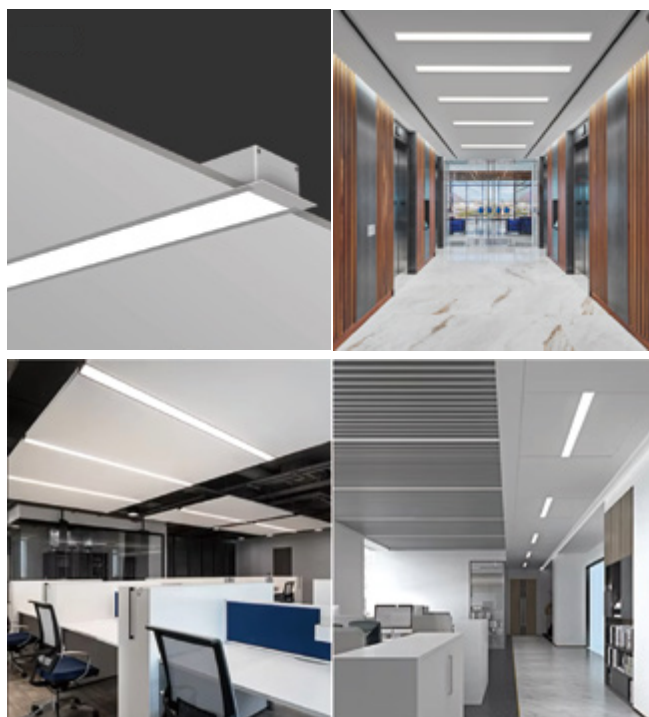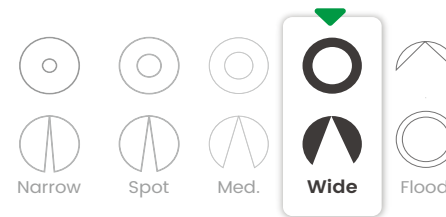


Led Linear Pendant Light



Product Description

The LED office pendant light offers a sleek and modern design, enhancing the brightness and aesthetics of any workspace. Its minimalistic style complements a range of décors, while its bright glow ensures desks and computers are well-lit. The LED technology ensures efficient energy usage and long-lasting performance. Easy to install and maintain, this pendant light is a simple yet powerful addition to modern offices.

Dimension

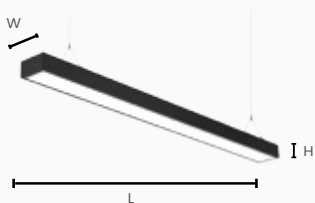

Rated Power	20W
L-W-H (mm)	1170*70*40
Rated Power	32W
L-W-H (mm)	1170*100*40
Rated Power	42W
L-W-H (mm)	1170*150*40
Rated Power	45W
L-W-H (mm)	1170*175*40
Rated Power	56W
L-W-H (mm)	1170*275*40


Technical Details





Basic Details

	Wattage 20W 32W 42W 45W 56W
	Luminous efficiency 120lm/W
	CCT 3000K 4000K 5000K 6500K
	Input Voltage 100-265V 220-240V , 50/60Hz
	Material PC
	Body Finish White Black

Mounting Information



Light Distribution

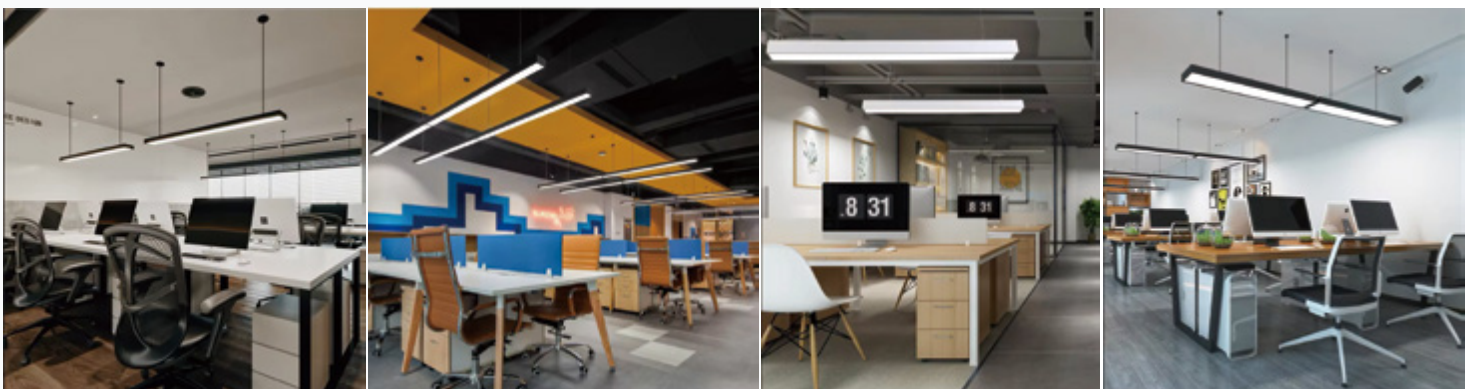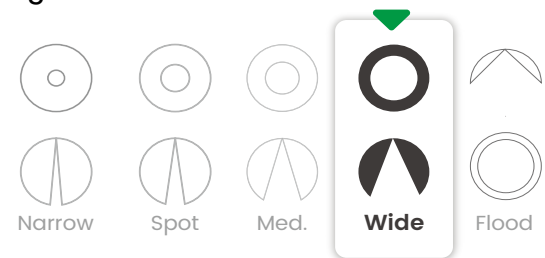

FANLIGHT

Aladdin founded in 1995

E27 Holder Fan Light



Product Description

This modern ceiling fan light, equipped with an E27 lamp holder, offers style and versatility. The E27 holder's compatibility allows for a wide range of bulb options, meeting diverse lighting needs. Its sleek white design creates an elegant look, perfect for any indoor space.

Dimension



Kind of mounting



Technical Details

IP20 RoHS CB CE CRI≥80

30,000 Hrs | LM80 | B10

Basic Details

- Wattage
30W LED
- Luminous
90lm/W
- CCT
3000K | 4000K | 6500K
- Input Voltage
110-240V, 50/60Hz
- Material
Plastic
- Body Finish
Blue | Green | Yellow | White | Pink



blue

green



yellow

pink

white



- Brightness control
Bright Dark
- Three-tone light
White Warm
- Remote control, gradient adjusts color and brig

Bladeless Turbo Fan Light



NEW




Product Description

This modern ceiling fan light combines elegance and versatility.

It features a sleek design with built-in fan, concealed for a clean look. A soft nightlight at the back provides a cozy glow, while advanced technology purifies the air, creating a healthy indoor environment.


Product Dimension

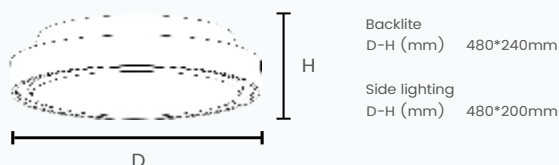


Night light



Intelligent remote control(2.4G)

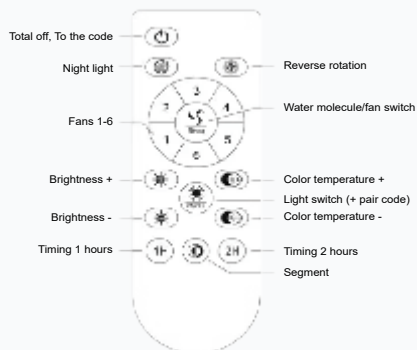

INSTALLATION PROCEDURE

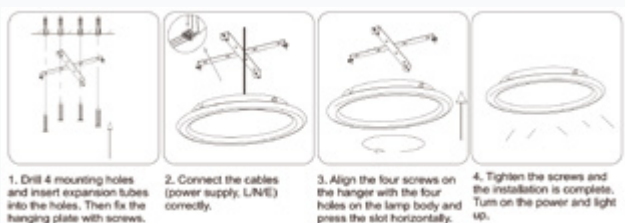

Technical Details


IP20 RoHS CB CE CRI≥95

30,000 Hrs | LM80 | B10


Basic Details

Wattage	56W LED	CCT	3000K-5700K
	18W FAN	Input Voltage	110-240V, 50/60Hz
Luminous efficiency	80lm/W	Material	ABS+PS+PA (Side lighting)
Sound range	≤53dB		ABS+PMMA+PA (Backlite)
Airflow	60CMM	Body Finish	White/Black and white/gray

Mounting Information



Light Distribution

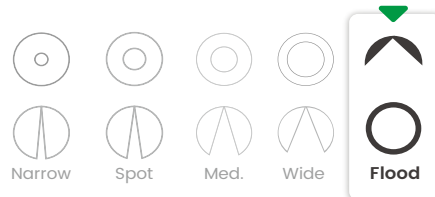

Optional selection--Nano sterilization fan lamp



Optional selection--TUYA APP



Roller-type bladeless fan light


NEW




Product Description

The fan-light fixture boasts a modern design with a unique feature: its ability to rotate the airflow up to 120° for customized comfort. Constructed from high-quality materials, it offers both style and functionality, perfect for any contemporary home. With convenient control options, adjusting airflow direction is easy and effortless.


Product Dimension

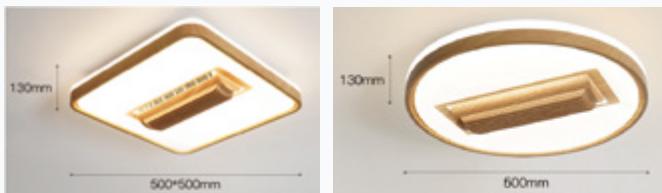


Intelligent remote control(2.4G)

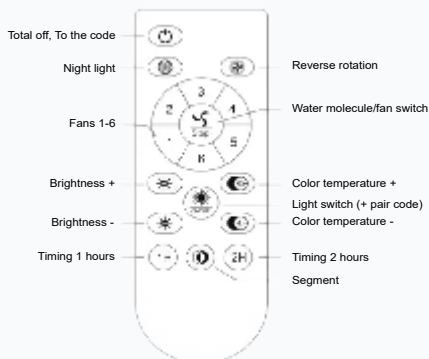


INSTALLATION PROCEDURE

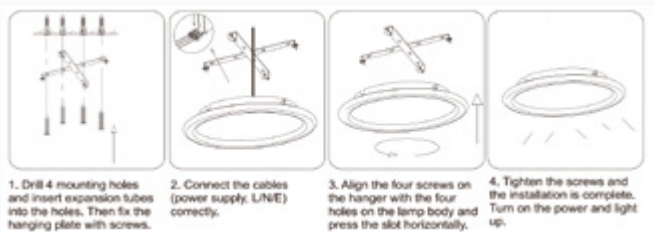


Technical Details




Basic Details

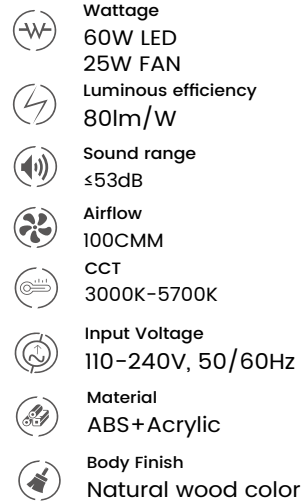


Mounting Information



Light Distribution

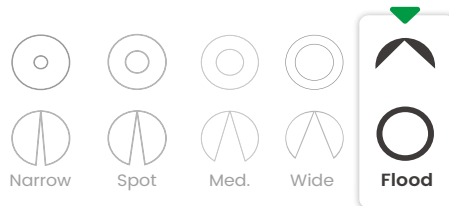

Details---Around 120° to distribute airflow

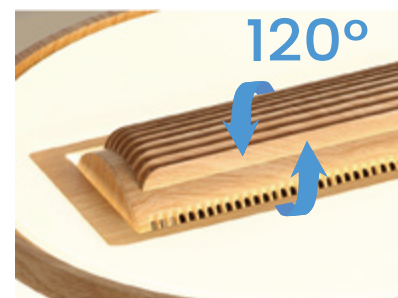

Optional selection--TUYA APP






B003



B004

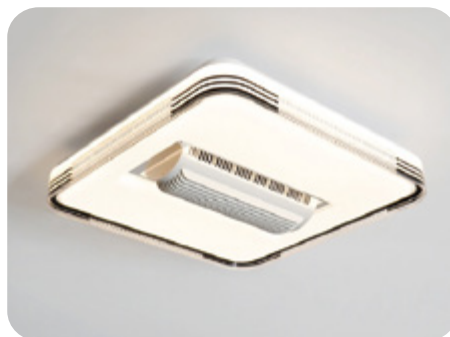

B005




B006



B007



B008

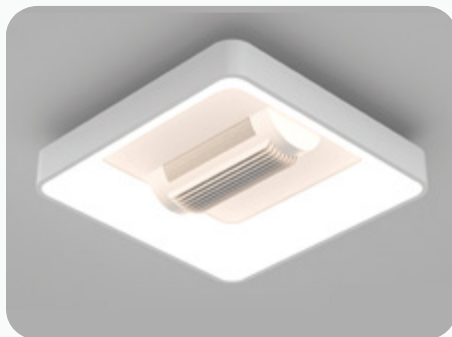


B009



B010



B011

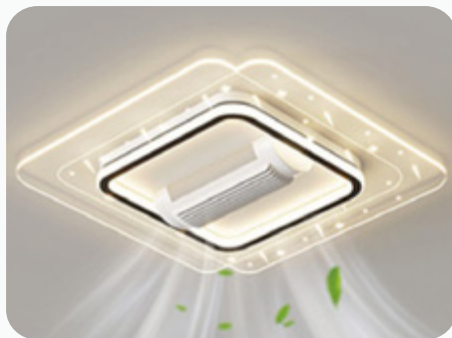

B012



B013



B014



B015



B016



B017

Wood Ceiling Fan With Led Lamp




Product Description

Ceiling fan lights are a multi-functional addition to any indoor space, combining the utility of a ceiling fan with the illumination of a lighting fixture. Featuring a white circular light shade and matching fan blades, these fan lights come in various styles to complement any interior design. The wood-toned top model offers a classic elegance, while the white and gold options provide a sleek and modern touch. Installed on a gray ceiling backdrop, these fan lights not only circulate air efficiently but also provide sufficient lighting, creating a comfortable and inviting atmosphere in your home.

Dimension



INSTALLATION PROCEDURE

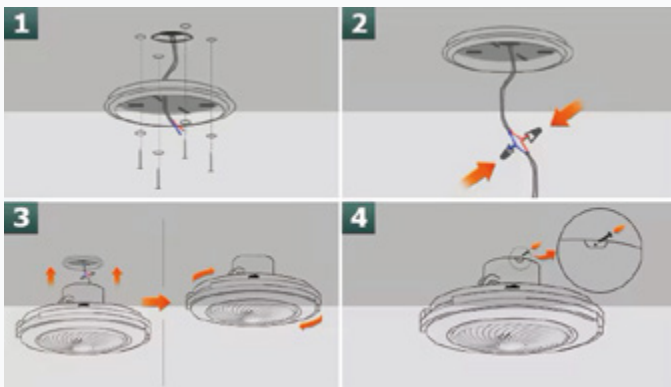






Technical Details

IP20 RoHS CB CE CRI≥80


30,000 Hrs | LM80 | B10

Basic Details


-  **Wattage**
15W LED
-  **Luminous**
90lm/W
-  **CCT**
3000K | 4000K | 6500K
-  **Input Voltage**
110-240V, 50/60Hz
-  **Material**
Wood+Acrylic+PP Fan+All Copper Motor

6 speeds adjustment


6 variable fan speeds insure you find just the right comfort level



STEPLESS ADJUSTABLE BRIGHTNESS

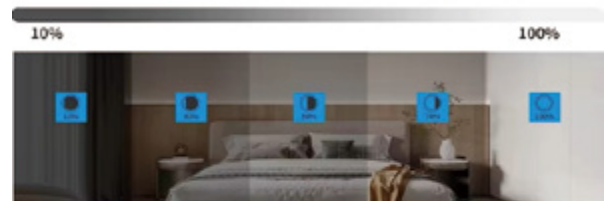

ADJUSTABLE COLOR TEMPERATURE

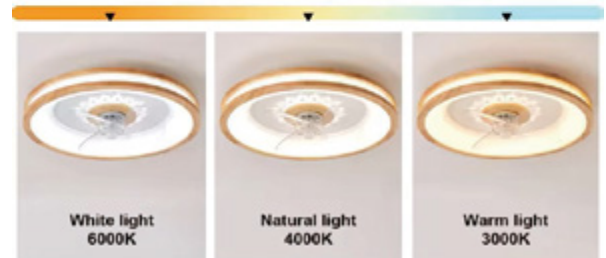



20K028

DC 20 inch ABS LED



20K033

DC 20 inch ABS LED



20K034

DC 20 inch ABS LED



20K036

DC 20 inch ABS LED



20K032

DC 20 inch ABS LED



20K030

DC 20 inch ABS LED



20K035

DC 20 inch ABS LED



20K026

DC 20 inch ABS LED



20K031

DC 20 inch ABS LED



20K005

DC 20 inch ABS LED



20K005

DC 20 inch ABS LED



20K005

DC 20 inch ABS LED

CREATIVE PRODUCT

Aladdin founded in 1995



Product Description

The PowerCube is an innovative and sleek power strip designed by DesignNest. Its compact cube shape seamlessly blends functionality with modern aesthetics. At the top, it boasts a standard wall socket, accommodating a wide range of appliances. On one side, two USB ports are thoughtfully positioned, enabling you to charge multiple devices simultaneously with ease. Crafted from high-quality materials, the PowerCube ensures durability and reliability, making it a versatile choice for both indoor and outdoor settings. Its compact design also allows for convenient portability, fitting neatly into luggage or bags, ideal for travelers. More than just a practical solution, the PowerCube adds a touch of sophistication to any space, enhancing both functionality and style.

Dimension



Basic Details



Input
250V 16A Max



AC Output
MAX3680W

DC Output

10W	A+A	MAX2.1A/5V
20W	A+C	10W=A1+C1:5V2.1A 20W=A1:5V3A,9V2A,12V1.5A 20W=C1:5V3A,9V2.22A,12V1.67A
20W	2*A+C	10W=A1+A2+C1:5V2.1A 20W=A1/A2:5V3A,9V2A,12V1.5A 20W=C1:5V3A,9V2.22A,12V1.67A
20W	A+2*C	10W=A1+C1+C2:5V2.1A 20W=A1:5V3A,9V2A,12V1.5A 20W=C1/C2:5V3A,9V2.22A,12V1.67A
20W	3*A	15W=A1+A2+A3:5V3A 20W=A1/A2/A3:5V3A,9V2A,12V1.5A
35W	C+C	15W=C1+C2:5V3.1A 35W=C1/C2:5V3A,9V3A,12V2.91A,15V2.33A,20V1.75A
45W	2*C+A	45W=USB-C1:5V3A,9V3A,12V3A,15V3A,20V2.25A 45W=USB-C2:5V3A,9V3A,12V3A,15V3A,20V2.25A 27W=USB-A1:5V3A,9V3A,12V2.25A,15V1.8A,20V1.35A



Wire size
3x1.0mm² & 1.5m




Material
Plastic & copper



Body Finish
Black | Green | Blue | Red



Country
Germany | France | Britain | China
(Sockets for other markets are being developed successively.)

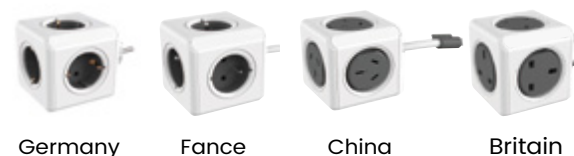

Optional selection-Cube wireless charging socket

1. Little occupy space.
2. Safe with six multi-protections.
3. Fast charging 5V-4A/5V-2.1A.
4. Environmental protection material.



Multi-functional socket with sensor night light



Product Description

This versatile power outlet combines cutting-edge technology with user-friendly functionality. Featuring a 3-mode switch, it offers customizable lighting options: "OFF" to disable the night light, "AUTO" to activate the light only in low-light conditions when someone approaches, and "ON" to keep the night light illuminated at all times. With built-in USB and Type-C ports, it provides seamless charging for all your devices. Perfect for modern homes, offices, or any space that values convenience and innovation, this smart socket ensures safety, efficiency, and adaptability to your needs. Stay connected and effortlessly powered with this all-in-one solution.

Function: Sensor light



Basic Details



Input
230V 16A Max



AC Output
MAX3680W

DC Output
10W A+C MAX2.4A/5V



Led power
0.6w



Material
Fire retardant & copper



Body Finish
White/Beige (Normal)
Other colors can be customized.



Shape: square/circular





Product model: ALD-DBE
Product Size: 138*116*58mm
Product material: HIPS, ABS, silicone
Battery capacity: 800mah/3.7V
Charging time: 2.5 hours
Battery life: 6 hours at high brightness:
 120 hours at low brightness

Product Description
 Big White Goose, tap with your hand to turn on/off:
 3000K soft light, stepless dimming, three levels of
 dimming suitable for various occasions, can be set
 with 15min delay to turn off the light, easy to switch,
 long battery life.



Product model: ALD-STB
Product Size: 10*8.6*11.6cm
Product material: ABS, PC, silicone
Battery capacity: 600mah/3.7V
Charging time: 2.5 hours
Battery life: 6 hours at high brightness:
 80 hours at low brightness

Product Description
 Handbag, tap with your hand to turn on/off:
 3000K soft light, stepless dimming, three levels of
 dimming suitable for various occasions, can be set
 with 15min delay to turn off the light, easy to switch,
 long battery life.



Product model: ALD-BTT
Product Size: 138*116*58mm
Product material: HIPS, ABS, silicone
Battery capacity: 800mah/3.7V
Charging time: 2.5 hours
Battery life: 6 hours at high brightness:
 120 hours at low brightness

Product Description
 Snotty Dolphin, tap with your hand to turn on/off:
 3000K soft light, stepless dimming, three levels of
 dimming suitable for various occasions, can be set
 with 15min delay to turn off the light, easy to switch,
 long battery life.



Product model: ALD-NL
Product Size: 112*102*69mm
Product material: HIPS, ABS, silicone
Battery capacity: 900mah/3.7V
Charging time: 2.5 hours
Battery life: 6 hours at high brightness:
 120 hours at low brightness

Product Description
 Versatile and charming Cheese light - For first use,
 please insert the power supply to charge and
 activate the Cheese Light, Press the mouse button
 briefly to turn the light on or off. Press and hold the
 button to adjust the brightness. Double-click the
 button to set a 15-minute delay to turn off the light.



Product model: ALD-TPY
Product Size: 138*116*58mm
Product material: HIPS, ABS, silicone
Battery capacity: 800mah/3.7V
Charging time: 2.5 hours
Battery life: 6 hours at high brightness:
 120 hours at low brightness

Product Description
 Silicone lying down bear, tap with your hand to turn
 on/off: 3000K soft light, stepless dimming, three
 levels of dimming suitable for various occasions, can
 be set with 15min delay to turn off the light, easy to
 switch, long battery life.



Product model: ALD-XBT
Product Size: 120*105*69mm
Product material: HIPS, ABS, silicone
Battery capacity: 800mah/3.7V
Charging time: 2.5 hours
Battery life: 6 hours at high brightness:
 120 hours at low brightness

Product Description
 Little white rabbit, tap with your hand to turn on/off:
 3000K soft light, stepless dimming, three levels of
 dimming suitable for various occasions, can be set
 with 15min delay to turn off the light, easy to switch,
 long battery life.




Product model: ALD-ML
Product Size: 184*95*75mm
Product material: HIPS, ABS, silicone
Battery capacity: 800mah/3.7V
Charging time: 2.5 hours
Battery life: 6 hours at high brightness:
 120 hours at low brightness

Product Description
 Cute Little Dragon, tap with your hand to turn
 on/off: 3000K soft light, stepless dimming, three
 levels of dimming suitable for various occasions, can
 be set with 15min delay to turn off the light, easy to
 switch, long battery life.




Product model: ALD-XYZ
Product Size: 100*100*96mm
Product material: HIPS, ABS, silicone
Battery capacity: 900mah/3.7V
Charging time: 3.5 hours
Battery life: 6.5 hours at high brightness:
 200 hours at low brightness

Product Description
 Crafted with high-quality ABS and food-grade
 silicone materials, the Little Duck Night Light
 features a translucent duck-shaped lampshade that
 allows light to shine through for illumination. The
 mouth serves as the on/off button, and by pressing
 and holding it, you can adjust the brightness.
 Double-clicking the button switches to a 15-minute
 timer function.

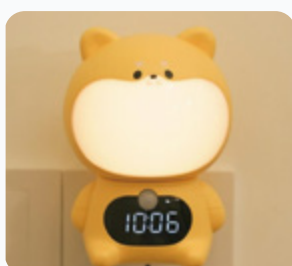

Product model: ALD-MQSZ
Product Size: 78*78*108mm
Product material: HIPS, ABS, PC, Copper
Battery capacity: 200mah/3.7V
Charging voltage: 110-230V
Battery life: 2.5 hours

Product Description
 Combination of clock and night light, with built-in
 light sensor, it automatically turns on at night and
 off at dawn according to the ambient light. Infrared
 human body induction ensures you won't stumble
 in the dark when getting up at night.

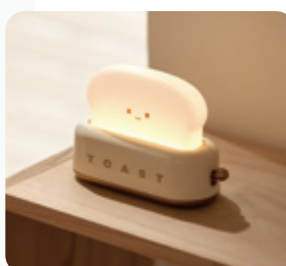

Product model: ALD-MBJ
Product Size: 134*54*98mm
Product material: HIPS, ABS, silicone
Battery capacity: 800mah/3.7V
Charging time: 2.5 hours
Battery life: 6 hours at high brightness:
 100 hours at low brightness

Product Description
 Bread Maker Night light - Crafted with premium
 ABS and HIPC materials, it's designed to resemble
 an adorable bread maker. The warm white bread
 serves as the lampshade, allowing light to shine
 through for illumination. The small lever on the side
 acts as the on/off button, and by pressing and
 holding it, you can adjust the brightness. Double-
 clicking the button activates the timer function,
 setting the light to automatically turn off after 15minutes.



Product model: ALD-DKJ
Product Size: 10.5*10.5*14.3cm
Product material: ABS, PC, silicone
Battery capacity: 1200mah/3.7V
Charging time: 4.5 hours
Battery life: 6 hours at high brightness:
 120 hours at low brightness

Product Description
 The egg shell is made of high-quality ABS material
 with a ball-bottom design, allowing it to wobble left
 and right like a tumbler. The head is made of
 silicone material, and by pressing and holding the
 head, you can adjust the brightness.



Product model: ALD-YGZ
Product Size: 103*125*96mm
Product material: HIPS, ABS, silicone
Battery capacity: 900mah/3.7V
Charging time: 2.5 hours
Battery life: 3 hours at high brightness:
 10 hours at low brightness


Product Description
 The rounded pig body serves as the main body that
 emits light for the night light. The pink nose has two
 functions: first, it serves as the button switch; second,
 by pressing and holding the nose, you can switch
 between color temperatures, transforming from warm
 light to white light and vice versa. The button at the
 bottom of the product allows you to adjust the timing
 for automatic light-off function.

New products are being developed continuously.


Cabinet lights with sensor



Dimension

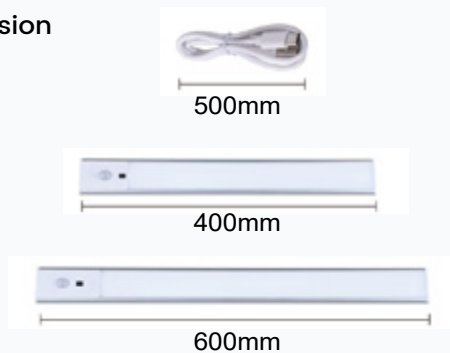

STRUCTURE

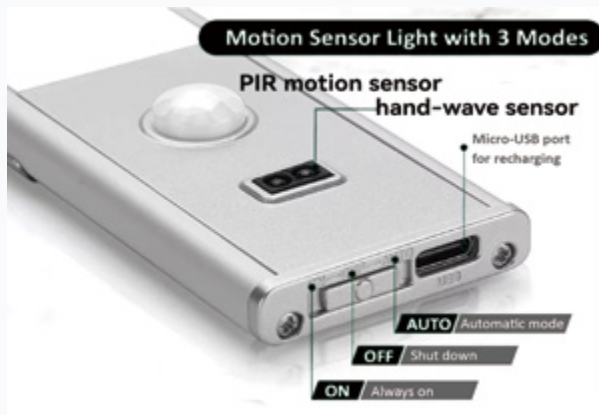


INSTALLATION STEPS



Cabinet lights



Dimension

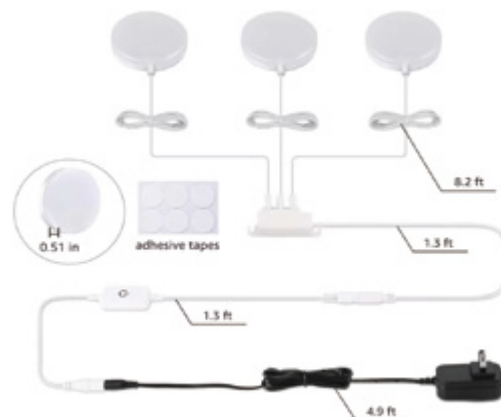

4 Brightness Levels

- Quick press to choose the brightness
- Memory function saves your energy



INSTALLATION STEPS




Multi-functional Magnetic Lamp



Product Description

This rechargeable desk lamp features adjustable color temperatures, allowing you to choose from warm, neutral, to cool light, perfect for various activities and moods. With its dimmable brightness control, you can tailor the lighting to suit your needs. The sleek design includes a magnetic base for easy attachment and removal, making it convenient to reposition or pack away. Charged via a Type-C port, it ensures hassle-free use without the worry of constant battery replacements.

Product Dimension

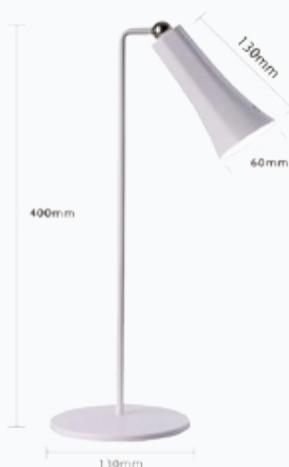

Installation method



Technical Details

IP20 RoHS CB CE CRI≥80

30,000 Hrs | LM80 | B10

Basic Details

- Wattage**
3W
- Battery**
3.7V 1200mAh
Charging time: 2h ; Battery life: 3-5H
3.7V 1800mAh
Charging time: 2.5h ; Battery life: 4-6H
- CCT**
3000K | 4000K | 6500K
- Input Voltage**
DC: 5V
- Body Finish**
White | Black

Structural Diagram



Optional selection

(Can charge the mobile phone in reverse)



SPECIAL LIGHTING

Aladdin founded in 1995




FEATURE AND BENEFIT

- Provide both UVB and UVA, high quality visual light and heat
- Simulate the sun providing the light radiation necessary for reptiles to survive
- UVA provides the warmth which cold-blooded animals are used to in nature
- UVB promotes production of Vitamin D3 helping calcium absorption for reptile
- Self-ballasted mercury vapor lamp without additional ballast

PRODUCT SIZE

SPECIFICATION	HMM	DNMM
80W/100W	120	80
125W	130	95
160W	150	110




FEATURE AND BENEFIT

- Uniform daylight spectrum out put
- Provide UVA which can promote normal activities of reptiles
- The soft light is not harsh
- Increase the temperature in the terrarium
- Suitable to daytime use
- High CRI is good for observing the reptiles' activities

PRODUCT SIZE

SPECIFICATION	HMM	DNMM
35W/50W/75W	103	63
100W	110	80
150W	130	95



FEATURE AND BENEFIT

- Simulate the natural moonlight which let reptiles feel night
- Providing a daily routine is conducive to the healthy growth of reptiles
- The best selection of induce night activities of reptiles
- It's a softest UVA that can let reptiles have a good rest
- It can produce heat to warm reptiles at night

PRODUCT SIZE

SPECIFICATION	HMM	DNMM
35W/50W/75W	103	63
100W	110	80
150W	130	95





FEATURE AND BENEFIT

- A variety of different transmittance UVB 2.0, 5.0, 10.0, 13.0 are available
- Provide both UVB and UVA_A and high quality visual light
- Simulate the sun providing the light radiation necessary for reptiles to survive
- Full spectrum promotes the growth of plants
- Can be switched on and off instantly

PRODUCT SIZE

SPECIFICATION	HMM	DNMM
130W	120	48
200W	147	64




FEATURE AND BENEFIT

- Encourage the mating behavior during the mating season of adult reptiles
- Improve the temperature on the reptile skin and also under the surface
- Infrared ray can improve the reptiles' appetite and accelerate the rehabilitation of injuries
- Infrared ray can dilate the reptiles' blood vessels and improve blood circulation
- The best selection of a heat source for observing nocturnal reptiles

PRODUCT SIZE

SPECIFICATION	HMM	DNMM
35W/50W/75W	103	63
100W	110	80
150W	130	95

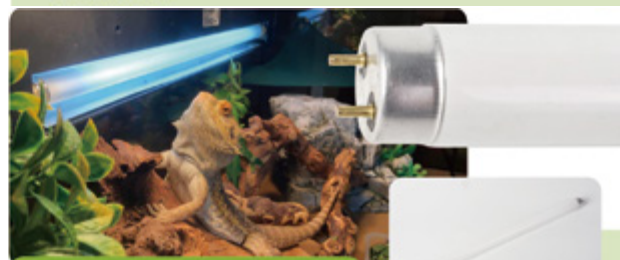


FEATURE AND BENEFIT

- Long tube shape makes for the equal distribution of light and soft light
- A variety of different transmittance UVB 2.0, 5.0, 10.0, 13.0 are available
- Provide both UVB and UVA_A and high quality visual light
- Simulate the sun providing the light radiation necessary for reptiles to survive
- Full spectrum promotes the growth of plants
- Can be switched on and off instantly

PRODUCT SIZE

SPECIFICATION	HMM	DNMM
10W	345	26
15W	451	26
25W	754	26
30W	958	26
36W	1213	26



BT SHAPE ON-WATER MH FISHING LAMP ON-WATER QUARTZ MH FISHING LAMP



TUNGSTEN FISHING LAMP



UNDER-WATER QUARTZ MH FISHING LAMP

Description	Wattage(W)	Base	Operating Voltage(V)	Operating Current(A)	Luminous Flux(lm)	Diameter(mm)	Max. Length(mm)	CCT(K)	Avg.Life(h)
BT180 MH1000W	1000	E39/E40	270	4.2	135000	180	395	2600-10000K GREEN/BLUE/PINK	12000
BT180 MH1500W	1500	E39/E40	260	6.5	202500	180	395	2600-10000K GREEN/BLUE/PINK	12000
BT180 MH2000W	2000	E39/E40	230	8.5	250000	200	495	2600-10000K GREEN/BLUE/PINK	12000
TT90 MH2000W-Q	2000	E39/E40	240	9.1	240000	90	475	2600-10000K GREEN/BLUE/PINK	2000
BT120 MH2000W-Q	2000	E39/E40	240	9.1	240000	120	485	2600-10000K GREEN/BLUE/PINK	2000
TT110 MH3000W-Q	3000	E39/E40	250	13	380000	110	540	2600-10000K GREEN/BLUE/PINK	2000
BT180 MH3000W-Q	3000	E39/E40	250	13	380000	180	550	2600-10000K GREEN/BLUE/PINK	2000
TT110 MH4000W-Q	4000	E39/E40	245	17.5	500000	110	540	2600-10000K GREEN/BLUE/PINK	2000
BT180 MH4000W-Q	4000	E39/E40	245	17.5	500000	180	550	2600-10000K GREEN/BLUE/PINK	2000
BT180 ML1000W	1000	E39/E40	220	4.5	30000	180	395	4500	3000
G130 TW1000W	1000	E39/E40	110/220	9.1/4.5	14000	130	235	2800	1000
RE-R160 TW500W-RED	500	E39/E40	110/220	9.1/4.5	4000	160	240	RED	1000
RE-R160 TW500W	500	E39/E40	110/220	4.5/2.3	7000	160	240	2800	1000
RE-R180 TW1000W	1000	E39/E40	110/220	9.1/4.5	14000	180	300	2800	1000
TT65 MH2000W-Q	2000	E39/E40	240	9.1	24000	65	365	2600-10000K	2000
TT70 MH3000W-Q	3000	E39/E40	250	13	38000	70	45	2600-10000K	2000
TT80 MH4000W-Q	4000	E39/E40	240	17.5	50000	80	480	2600-10000K	2000

Product Description

Super high output lamp technology
Superb color temperature and luminance preservarion
Magnificent penetration into the deep sea
Maximum luminous efficiency by minimizing eletricity loss
Any color temperature including green/blue/pink can be customized

MAGNETIC BALLAST FOR FISHING LAMP 1000-4000W



SINGLE ENDED METAL HALIDE LAMP

SINGLE ENDED CERAMIC METAL HALIDE LAMP

DOUBLE ENDED METAL HALIDE LAMP

DOUBLE ENDED CERAMIC METAL HALIDE LAMP





Description	Wattage(W)	Base	Operating Voltage(V)	Operating Current(A)	Luminous Flux(lm)	Diameter(mm)	Max. Length(mm)	CCT(K)	PPF(mol/m)	Avg.Life(h)
T46 MH250W	250	E39/E40	130	2.15	20000	46	255	4000K/6000K/10000K	275	10000
T46 MH400W	400	E39/E40	130	3.25	34000	46	290	4000K/6000K/10000K	480	10000
T46 MH600W	600	E39/E40	110	6.2	52000	63.5	290	4000K/6000K/10000K	720	10000
TT76 MH600W	600	E39/E40	110	6.2	52000	76	290	4000K/6000K/10000K	720	10000
TT76 MH1000W	1000	E39/E40	250	4.5	90000	76	335	4000K/6000K/10000K	1300	10000
CMH315W PGZX18	315	PGZX18	100	3.2	34000	38.5	193	3000K/4000K	600	15000
T52 CMH315W	315	E39/E40	100	3.2	34000	52	280	3000K/4000K	600	15000
T52 CMH600W	600	E39/E40	125	6	60000	52	280	3000K/4000K	1150	15000
DE MH600W	600	wire	110	6.2	52500	32.5	390	4000K/6000K/10000K	750	10000
DE MH750W	750	wire	200	3.8	64000	32.5	390	4000K/6000K/10000K	930	10000
DE MH1000W	1000	wire	250	4.5	90000	32.5	390	4000K/6000K/10000K	1300	10000
DE CMH630W	630	wire	210	3.2	68000	32.5	395	3000K/4000K	1350	15000
DE CMH945W	945	wire	270	4	104000	32.5	395	3000K/4000K	2050	15000
DE MH1000W	1000	wire	230	4.8	115000	32.5	395	3000K/4000K	2150	15000

Product Description

Super high output lamp technology
Optimized spectrum, distribution pattern, lumen output, and irradiance
Reliable operation throughout the growth cycle
Engineered in ISO certified facility
Richest spectrum closest to sunlight on the market
Offers significant improvement in spectral quality over standard MH
Tubular low profile design for compact fixtures

MAGNETIC BALLAST FOR PLANT GROWTH LAMP

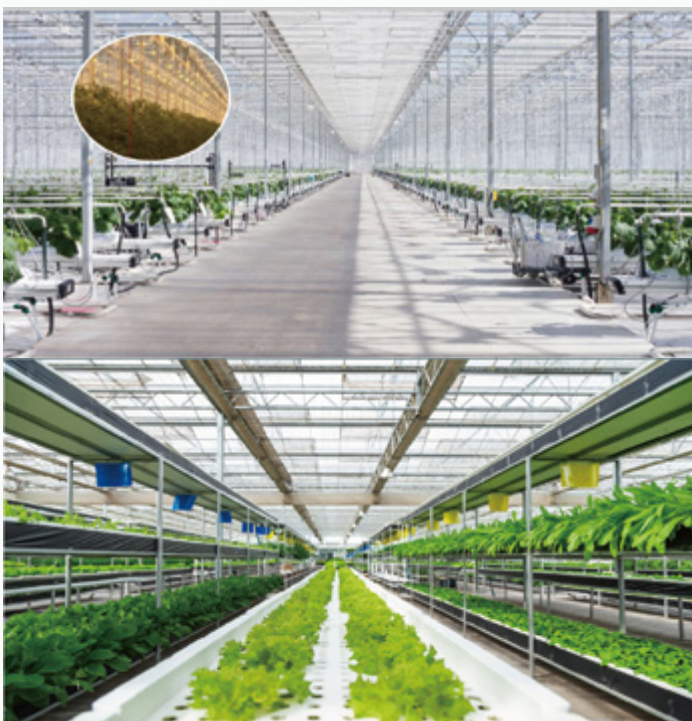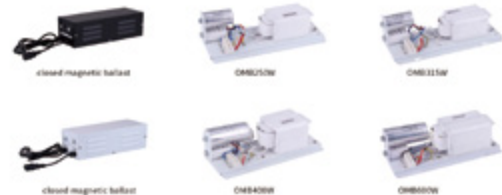

SINGLE ENDED HIGH PRESSURE SODIUM LAMP



DOUBLE ENDED HIGH PRESSURE SODIUM LAMP



Description	Wattage(W)	Base	Operating Voltage(V)	Operating Current(A)	Luminous Flux(lm)	Diameter(mm)	Max. Length(mm)	CCT(K)	PPF(mol/m)	Avg.Life(h)
T46 HPS250W	250	E39/E40	105	3	30000	46	255	2100K	430	24000
T46 HPS400W	400	E39/E40	110	4.2	55000	46	290	2100K	650	24000
T46 HPS600W-L	600	E39/E40	110	6.2	90000	46	290	2100K	1000	24000
T46 HPS600W-H	600	E39/E40	190	3.5	90000	46	290	2100K	1050	24000
T65 HPS1000W-L	1000	E39/E40	115	8.5	145000	65	383	2100K	2000	24000
ET25 HPS1000W-H	1000	E39/E40	250	4.5	148000	78	383	2100K	2050	24000
DE HPS600W-L	600	wire	110	6.2	90000	32.5	390	2100K	1000	24000
DE HPS600W-H	600	wire	190	3.5	90000	32.5	390	2100K	1050	24000
DE HPS750W	750	wire	200	3.8	113000	32.5	390	2100K	1050	24000
DE HPS1000W	1000	wire	210	5	150000	32.5	390	2100K	2100	24000
RE-ED90 HPS250W	250	revolving E40	105	3	255000	90	245	2100K	370	24000
RE-ED120 HPS400W	400	revolving E40	110	4.2	470000	120	315	2100K	560	24000
RE-ED140 HPS600W	600	revolving E40	190	3.5	770000	140	345	2100K	1000	24000
RE-TR120 HPS600W-AI	600	revolving E40	190	3.5	780000	120	345	2100K	1050	24000
RE-TR120 HPS600W-Ag	600	revolving E40	190	3.5	860000	120	345	2100K	1150	24000

Product Description

Super high output lamp technology
Optimized spectrum, distribution pattern, lumen output and irradiance
Reliable operation throughout the growth cycle
Highest quality and consistent performance
Engineered in ISO certified facility
High red and blue spectral ratios for good photosynthesis efficiency
Great lumen output for high PAR values
Robust plants through high blue light output
High red light ratio for healthy plant growth
Economic (long average life, high lumen output, low energy consumption)
Tubular low profile design for compact fixtures

MAGNETIC BALLAST FOR PLANT GROWTH LAMP



Company certification -

ErP ISO9001 ISO14001 new high-tech enterprise



Product certification -



Add: No. 10 Xiangyun road, wujin economic & development zone
Changzhou, Jiangsu, China
CHANGZHOU ALADDIN LIGHTING TECH CO., LTD