



FILAMENT BULB

Different glass



Clear



Amber



Milky



Frosted



Twist



Smoky



Half gold-plated



Half-silvered



Half plated rose gold

Base



E12




E14




E26



E27



E39



E40



B15d



B22



GU10



Copper plated
Nickle base

RoHS

Erp

CE

CB

SAA



◆ Specification



Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-FLA602.2	2.2W	200-250V	470	>0.5	60*108
ALD-FLA603.8	3.8W	200-250V	806	>0.5	60*108
ALD-FLA6005	5W	200-250V	1055	>0.5	60*108
ALD-FLA6007	7W	200-250V	1521	>0.5	60*108
ALD-FLA6009	9W	200-250V	1900	>0.5	60*108
ALD-FLC352.2	2.2W	200-250V	470	>0.5	35*98
ALD-FLC353.8	3.8W	200-250V	806	>0.5	35*98
ALD-FLC35TA2.2	2.2W	200-250V	470	>0.5	35*117
ALD-FLC35TA3.8	3.8W	200-250V	806	>0.5	35*117
ALD-FLP452.2	2.2W	200-250V	470	>0.5	45*78
ALD-FLP453.8	3.8W	200-250V	806	>0.5	45*78

◆ Specification





Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-FLA604.8	4.8W	220-240V	806	>0.5	60*108
ALD-FLA606.5	6.5W	220-240V	1055	>0.5	60*108
ALD-FLA609.5	9.5W	220-240V	1521	>0.5	60*108
ALD-FLA6013	13W	220-240V	2452	>0.7	60*108
ALD-FLC352.8	2.8W	220-240V	470	>0.5	35*98
ALD-FLC354.8	4.8W	220-240V	806	>0.5	35*98
ALD-FLC356.5	6.5W	220-240V	1055	>0.5	35*98
ALD-FLP452.8	2.8W	220-240V	470	>0.5	45*78
ALD-FLP454.8	4.8W	220-240V	806	>0.5	45*78
ALD-FLP456.5	6.5W	220-240V	1055	>0.5	45*78

Base



Color temperature





A 60



G 125

◆ Specification



135
LM/W

CLASS
D

Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-FLA6007CCT	7W	110-130V/220-240V	1055	>0.5	60*108
ALD-FLG12508CCT	8W	110-130V/220-240V	1250	>0.5	125*170



ST 64



A 60



C 35TA



C 35



P 45

◆ Specification



110 100
LM/W LM/W


CLASS
EF

Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-FLST6407	7W	220-240V	806	>0.5	64*140
ALD-FLA604.9	4.9W	220-240V	470	>0.5	60*108
ALD-FLA6007	7W	220-240V	806	>0.5	60*108
ALD-FLA608.5	8.5W	220-240V	1055	>0.5	60*108
ALD-FLC35TA2.9	2.9W	220-240V	250	>0.5	35*117
ALD-FLC35TA4.9	4.9W	220-240V	470	>0.5	35*117
ALD-FLC352.9	2.9W	220-240V	250	>0.5	35*98
ALD-FLC354.9	4.9W	220-240V	470	>0.5	35*98
ALD-FLP452.9	2.9W	220-240V	250	>0.5	45*78
ALD-FLP454.9	4.9W	220-240V	470	>0.5	45*78

Base



Color temperature






◆ Specification



Item	Wattage	Voltage	Lumen	Class	DF	Size(mm)
ALD-FLA6004	4W	220-240V	470	E	>0.5	60*108
ALD-FLA604.8	4.8W	220-240V	600	E	>0.5	60*108
ALD-FLA6006	6W	220-240V	660	E	>0.5	60*108
ALD-FLA6007	7W	220-240V	806	E	>0.5	60*108
ALD-FLA6008	8W	220-240V	1055	E	>0.5	60*108
ALD-FLA6009	9W	220-240V	1200	E	>0.5	60*108
ALD-FLA6010	10W	220-240V	1300	E	>0.5	60*108
ALD-FLA6011	11W	200-250V	1521	E	>0.7	60*108
ALD-FLA6012	12W	200-250V	2452	B	>0.7	60*108
ALD-FLA6813	13W	200-250V	1800	D	>0.7	68*120
ALD-FLA6818	18W	200-250V	3200	C	>0.7	68*120
ALD-FLA7516	16W	200-250V	2300	D	>0.7	75*140
ALD-FLA7518	18W	200-250V	2700	D	>0.7	75*140

Item	Wattage	Voltage	Lumen	Class	DF	Size(mm)
ALD-FLC3502	2W	220-240V	250	E	>0.5	35*98
ALD-FLC3503	3W	220-240V	350	E	>0.5	35*98
ALD-FLC3504	4W	220-240V	470	E	>0.5	35*98
ALD-FLC354.8	4.8W	220-240V	600	E	>0.5	35*98
ALD-FLC3506	6W	220-240V	806	E	>0.5	35*98
ALD-FLC35TA02	2W	220-240V	250	E	>0.5	35*117
ALD-FLC35TA03	3W	220-240V	350	E	>0.5	35*117
ALD-FLC35TA04	4W	220-240V	470	E	>0.5	35*117
ALD-FLC35TA4.8	4.8W	220-240V	600	E	>0.5	35*117
ALD-FLC35TA06	6W	220-240V	806	E	>0.5	35*117

Item	Wattage	Voltage	Lumen	Class	DF	Size(mm)
ALD-FLP4502	2W	220-240V	250	E	>0.5	45*78
ALD-FLP4503	3W	220-240V	350	E	>0.5	45*78
ALD-FLP4504	4W	220-240V	470	E	>0.5	45*78
ALD-FLP454.8	4.8W	220-240V	600	E	>0.5	45*78
ALD-FLP4506	6W	220-240V	806	E	>0.5	45*78





◆ Specification





100
LM/W

CLASS **F**

Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-FLR5002	2W	220-240V	170	>0.5	50*84
ALD-FLR5003	3W	220-240V	255	>0.5	50*84
ALD-FLR5004	4W	220-240V	340	>0.5	50*84
ALD-FLR5005	5W	220-240V	425	>0.5	50*84
ALD-FLR6304	4W	220-240V	340	>0.5	63*103
ALD-FLR6306	6W	220-240V	600	>0.5	63*103
ALD-FLR6307	7W	220-240V	700	>0.5	63*103
ALD-FLR6308	8W	220-240V	800	>0.5	63*103
ALD-FLR8007	7W	220-240V	700	>0.5	80*150
ALD-FLR8008	8W	220-240V	800	>0.5	80*150
ALD-FLR8010	10W	220-240V	1000	>0.5	80*150

Base 

Glass 

Color temperature 




135 110
LM/W LM/W

CLASS **DE**

Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-FLG8003	3W	220-240V	330	>0.5	80*120
ALD-FLG8004	4W	220-240V	470	>0.5	80*120
ALD-FLG8005	5W	220-240V	600	>0.5	80*120
ALD-FLG8007	7W	220-240V	806	>0.5	80*120
ALD-FLG8008	8W	220-240V	1055	>0.5	80*120
ALD-FLG8010	10W	220-240V	1200	>0.5	80*120
ALD-FLG8011	11W	220-240V	1521	>0.7	80*120
ALD-FLG9503	3W	220-240V	330	>0.5	95*140
ALD-FLG9504	4W	220-240V	470	>0.5	95*140
ALD-FLG9505	5W	220-240V	600	>0.5	95*140
ALD-FLG9506	6W	220-240V	660	>0.5	95*140
ALD-FLG9507	7W	220-240V	806	>0.5	95*140
ALD-FLG9508	8W	220-240V	1055	>0.5	95*140
ALD-FLG9510	10w	220-240V	1200	>0.5	95*140
ALD-FLG9511	11W	220-240V	1521	>0.7	95*140
ALD-FLG12503	3W	220-240V	330	>0.5	125*170
ALD-FLG12504	4W	220-240V	470	>0.5	125*170
ALD-FLG12505	5W	220-240V	600	>0.5	125*170
ALD-FLG12506	6W	220-240V	660	>0.5	125*170
ALD-FLG12507	7W	220-240V	806	>0.5	125*170
ALD-FLG12508	8W	220-240V	1055	>0.5	125*170
ALD-FLG12510	10w	220-240V	1200	>0.5	125*170
ALD-FLG12511	11W	220-240V	1521	>0.7	125*170

Base 

Glass 

Color temperature 



◆ Specification



110 100
LM/W LM/W

CLASS E F

Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-FLT2602	2W	220-240V	250	>0.5	26*85
ALD-FLT2603	3W	220-240V	330	>0.5	26*85
ALD-FLT2604	4W	220-240V	470	>0.5	26*85
ALD-FLT2605	5W	220-240V	550	>0.5	26*85
ALD-FLT2606	6W	220-240V	660	>0.5	26*85
ALD-FLT4502	2W	220-240V	250	>0.5	45*110
ALD-FLT4504	4W	220-240V	470	>0.5	45*110
ALD-FLT4506	6W	220-240V	660	>0.5	45*110
ALD-FLT4507	7W	220-240V	806	>0.5	45*110
ALD-FLT4508	8W	220-240V	1055	>0.5	45*110
ALD-FLT4509	9W	220-240V	1200	>0.5	45*110
ALD-FLT3004	4W	220-240V	470	>0.5	30*100
ALD-FLT3006	6W	220-240V	660	>0.5	30*100
ALD-FLT3007	7W	220-240V	806	>0.5	30*100
ALD-FLT3008	8W	220-240V	1055	>0.5	30*100
ALD-FLT3009	9W	220-240V	1200	>0.5	30*100

Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-FLST2601	1W	220-240V	100	>0.5	26*60
ALD-FLST2602	2W	220-240V	200	>0.5	26*60
ALD-FLST2603	3W	220-240V	300	>0.5	26*60
ALD-FLST451.2	1.2W	220-240V	100	>0.5	45*86
ALD-FLST4502	2W	220-240V	200	>0.5	45*86
ALD-FLST5803	3W	220-240V	300	>0.5	58*130
ALD-FLST5804	4W	220-240V	400	>0.5	58*130
ALD-FLST5807	7W	220-240V	700	>0.5	58*130
ALD-FLST5808	8W	220-240V	800	>0.5	58*130
ALD-FLST6403	3W	220-240V	300	>0.5	58*130
ALD-FLST6404	4W	220-240V	400	>0.5	58*130
ALD-FLST6405	5W	220-240V	500	>0.5	64*140
ALD-FLST6407	7W	220-240V	700	>0.5	64*140
ALD-FLST6408	8W	220-240V	800	>0.5	64*140
ALD-FLST6409	9W	220-240V	900	>0.5	64*140


Base



Glass



Color temperature



**White
Filament**



P 45



C 35



A 60




ST 64

◆ Specification



Item	Wattage	Voltage	Lumen	Class	DF	Size(mm)
ALD-FLP453.4	3.4W	220-240V	470	D	>0.5	45*78
ALD-FLP455.9	5.9W	220-240V	806	D	>0.5	45*78
ALD-FLC353.4	3.4W	220-240V	470	D	>0.5	35*98
ALD-FLC355.9	5.9W	220-240V	806	D	>0.5	35*98
ALD-BLA605.9	5.9W	220-240V	806	D	>0.5	60*108
ALD-BLA607.8	7.8W	220-240V	1055	D	>0.5	60*108
ALD-BLA6011	11W	220-240V	1521	D	>0.7	60*108
ALD-BLA6015	15W	220-240V	2100	D	>0.7	60*108
ALD-BLA6012	12W	220-240V	2452	B	>0.7	60*108
ALD-FLP4504	4W	220-240V	470	E	>0.5	45*78
ALD-FLP4506	6W	220-240V	806	E	>0.5	45*78
ALD-FLC3504	4W	220-240V	470	E	>0.5	35*98
ALD-FLC3506	6W	220-240V	806	E	>0.5	35*98
ALD-FLA6007	7W	220-240V	806	E	>0.5	60*108
ALD-FLA6008	8W	220-240V	1055	E	>0.5	60*108
ALD-FLST6404	4W	220-240V	470	E	>0.5	64*140
ALD-FLST6407	7W	220-240V	806	E	>0.5	64*140
ALD-FLST6408	8W	220-240V	1055	E	>0.5	64*140



**Light
Sensor**

AUTO ON / AUTO OFF

Surrounding light < 5lux




Surrounding light > 30lux



◆ Specification



Item	Wattage	Voltage	Lumen	Class	DF	Size(mm)
ALD-FLA604.5	4.5W	220-240V	470	F	>0.5	60*108
ALD-FLA6007	7W	220-240V	806	E	>0.5	60*108
ALD-FLA607.8	7.8W	220-240V	1055	D	>0.5	60*108





C 35

T 30

◆ Specification



Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-FLC351.5	1.5W	220-240V	30	>0.5	35*98
ALD-FLC3503	3W	220-240V	150	>0.5	35*98
ALD-FLC3505	5W	220-240V	300	>0.5	35*98
ALD-FLT304.5	4.5W	220-240V	300	>0.5	30*100
ALD-FLT305.5	5.5W	220-240V	450	>0.5	30*100



Color Bulb



ST 45

A 60

◆ Specification



Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-FLST4501	1W	220-240V	NA	>0.5	45*89
ALD-FLA6004	4W	220-240V	NA	>0.5	60*108





◆ Specification



Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-FLP452.5	2.5W	220-240V	136	>0.5	45*78
ALD-FLP4503	3W	220-240V	200	>0.5	45*78
ALD-FLC352.5	2.5W	220-240V	136	>0.5	35*98
ALD-FLC3503	3W	220-240V	200	>0.5	35*98
ALD-FLA602.5	2.5W	220-240V	136	>0.5	60*108
ALD-FLA6003	3W	220-240V	200	>0.5	60*108
ALD-FLA6004	4W	220-240V	250	>0.5	60*108
ALD-FLA604.9	4.9W	220-240V	400	>0.5	60*108
ALD-FLT452.5	2.5W	220-240V	136	>0.5	45*110
ALD-FLT4503	3W	220-240V	200	>0.5	45*110
ALD-FLT4504	4W	220-240V	250	>0.5	45*110
ALD-FLT454.9	4.9W	220-240V	400	>0.5	45*110
ALD-FLT302.5	2.5W	220-240V	136	>0.5	30*150
ALD-FLT3003	3W	220-240V	200	>0.5	30*150
ALD-FLT3004	4W	220-240V	250	>0.5	30*150
ALD-FLT304.9	4.9W	220-240V	400	>0.5	30*150
ALD-FLST6404	4W	220-240V	250	>0.5	64*140
ALD-FLST644.9	4.9W	220-240V	400	>0.5	64*140
ALD-FLG9504	4W	220-240V	250	>0.5	95*140
ALD-FLG954.9	4.9W	220-240V	400	>0.5	95*140
ALD-FLG12504	4W	220-240V	250	>0.5	125*170
ALD-FLG1254.9	4.9W	220-240V	400	>0.5	125*170
ALD-FLPS16508	8W	220-240V	650	>0.5	165*270


Base



Glass



Color temperature



HID Filament



T 38



T 46



T 52



ED 75



ED 90



ED 120



◆ Specification



195
LM/W

CLASS B

Item	Wattage	Voltage	Lumen	PF	Size(mm)
ALD-FLT3817	17W	220-240V	3315	>0.9	38*170
ALD-FLT3826	26W	220-240V	5070	>0.9	38*210
ALD-FLT4640	40W	220-240V	7800	>0.9	46*225
ALD-FLT5245	45W	220-240V	8775	>0.9	52*232
ALD-FLED7518	18W	220-240V	3150	>0.9	75*180
ALD-FLED9024	24W	220-240V	4200	>0.9	90*245
ALD-FLED9036	36W	220-240V	5800	>0.9	90*245
ALD-FLED12060	60W	220-240V	10800	>0.9	120*280
ALD-FLED12070	70W	220-240V	12000	>0.9	120*280
ALD-FLED12080	80W	220-240V	15000	>0.9	120*280


Base



Glass




Color temperature



**Deco
DIY**




◆ Specification



Item	Wattage	Voltage	Lumen	Class	DF	Size(mm)
ALD-FLGI252.5	2.5W	220-240V	136	G	>0.5	125*170
ALD-FLGI254.5	4.5W	220-240V	250	G	>0.5	125*170



◆ Specification




Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-FLG452.5	2.5W	220-240V	60	>0.5	45*78
ALD-FLA602.5	2.5W	220-240V	60	>0.5	60*108
ALD-FLA604.5	4.5W	220-240V	120	>0.5	60*108
ALD-FLC352.5	2.5W	220-240V	60	>0.5	35*98
ALD-FLC35TA2.5	2.5W	220-240V	60	>0.5	35*117
ALD-FLST644.5	4.5W	220-240V	140	>0.5	64*140
ALD-FLG954.5	4.5W	220-240V	140	>0.5	95*140
ALD-FLGI254.5	4.5W	220-240V	140	>0.5	125*170





A 160T **A 160S** **SNT 160T** **SNT 180T** **BT 180T** **BT 180S** **R 180S**

◆ Specification



Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-LRFLA160T	4W/8W	220-240V	108-540	>0.5	160*275
ALD-LRFLA160S	4W/6W/8W/12W	220-240V	108-760	>0.5	160*275
ALD-LRSNT160S	4W/6W/8W/12W	220-240V	108-760	>0.5	160*270
ALD-LRSNT180S	4W/6W/8W/12W	220-240V	108-760	>0.5	180*290
ALD-LRBT180T	4W/8W	220-240V	108-540	>0.5	180*345
ALD-LRBT180S	4W/6W/8W/12W	220-240V	108-760	>0.5	180*345



SMD125 **SMD150** **SMD125W** **SMD150W** **SMD 125C** **SMD 125T**

◆ Specification



Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-LRFLSMD125	4W	220-240V	300-360	>0.5	125*175
ALD-LRFLSMD150	4W	220-240V	300-360	>0.5	150*210
ALD-LRFLSMD125W	4W	220-240V	300-360	>0.5	125*175
ALD-LRFLSMD150W	4W	220-240V	300-360	>0.5	150*210
ALD-LRFLSMD125C	4W	220-240V	300-360	>0.5	125*175
ALD-LRFLSMD150C	4W	220-240V	300-360	>0.5	150*210
ALD-LRFLSMD125T	4W	220-240V	300-360	>0.5	125*175





YL 180T



YL 180S



FW 180T



FW 120T



FW 180S



FW 120S



DHP 190T



DHP 190S



CTD 180T



CTD 120T




CTD 180S



CTD 120S

◆ Specification



Item	Wattage	Voltage	Lumen	DF	Size(mm)
ALD-LRYL180T	4W/8W	220-240V	108-540	>0.5	180*420
ALD-LRYL180S	4W/6W/8W/12W	220-240V	108-760	>0.5	180*420
ALD-LRFW180T	4W/8W	220-240V	290/540	>0.5	180*400
ALD-LRFW120T	4W/8W	220-240V	290/540	>0.5	120*270
ALD-LRFW180S	4W/6W/8W/12W	220-240V	108-760	>0.5	180*400
ALD-LRFW120S	4W/6W/8W/12W	220-240V	108-760	>0.5	120*270
ALD-LRDHP190T	4W/8W	220-240V	108-540	>0.5	190*400
ALD-LRDHP190S	4W/6W/8W/12W	220-240V	108-760	>0.5	190*400
ALD-LRCTD180T	4W/8W	220-240V	108-540	>0.5	180*380
ALD-LRCTD120T	4W/8W	220-240V	108-540	>0.5	120*250
ALD-LRCTD180S	4W/6W/8W/12W	220-240V	108-760	>0.5	180*380
ALD-LRCTD120S	4W/6W/8W/12W	220-240V	108-760	>0.5	120*250

Base



Glass




Color temperature






Fixed lamp holder

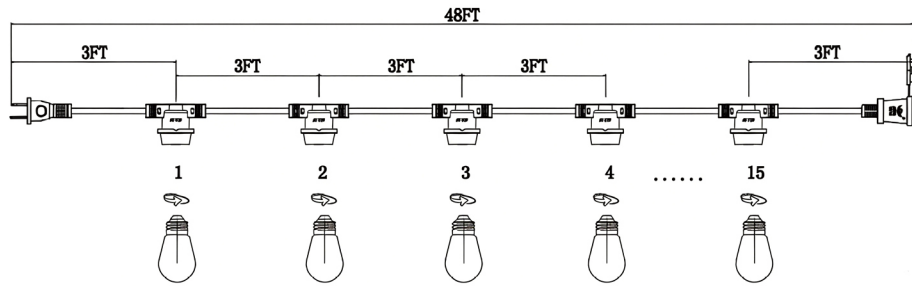

Hanging lamp holder

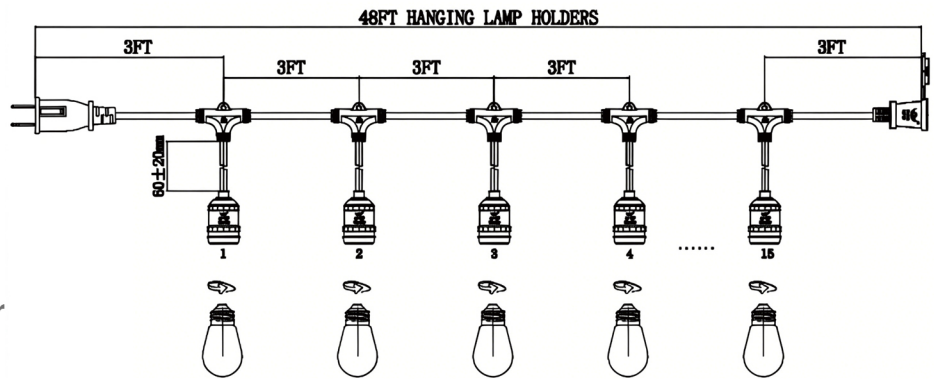

◆ Specification



No.	Total length (m)	Number of lamp heads	Lamp head line height (m)	Wire diameter (mm ²)	Wire material	Wire color	Socket
1	5	10PCS	1	0.75/1	Pure copper	White/Black	European/British
2	10	10PCS	1	0.75/1	Pure copper	White/Black	European/British
3	10	15PCS	1	0.75/1	Pure copper	White/Black	European/British
4	10	20PCS	1	0.75/1	Pure copper	White/Black	European/British



Pendant light-A



Pendant light-B



Pendant light-C



Pendant light-D



Pendant light-E



Pendant light-F

◆ Specification



Item	Voltage	Cable Spe(mm ²)	Cable Length(m)	Cable material	Socket
Pendant light-A	120-240V	HO3W-F 2x0.75mm ² ; SVT 2x18AWG	1.8/2.0/Customized	Hemp Rope Twisted Cable	European/British
Pendant light-B	120-240V	HO3W-F 2x0.75mm ² ; SVT 2x18AWG	1.8/2.0/Customized	Hemp Rope Twisted Cable	European/British
Pendant light-C	120-240V	HO3W-F 2x0.75mm ² ; SVT 2x18AWG	1.8/2.0/Customized	Textile Covered PVC Cable	European/British
Pendant light-D	120-240V	HO3W-F 2x0.75mm ² ; SVT 2x18AWG	-	PC Wire	European/British
Pendant light-E	120-240V	HO3W-F 2x0.75mm ² ; SVT 2x18AWG	-	PC Wire	European/British
Pendant light-F	120-240V	HO3W-F 2x0.75mm ² ; SVT 2x18AWG	-	PC Wire with hemp rope	European/British



Outdoor Solar String Lights With 8 Functions

Two 18650 lithium batteries,
3.7V/(2x1200)mah



Lighting modes

- | | | | |
|--------------------|-------------|-----------------|-------------|
| 1 AUTO MODE 2 TO 8 | 2 IN WAVES | 3 SEQUENTIAL | 4 SLO-GLO |
| 5 CHASING FLASH | 6 SLOW FADE | 7 TWINKLE FLASH | 8 STEADY ON |

◆ Specification

Total Length	10M Cable Color
Material	Black PVC
Charging method	Solar panel/Type-C charging
Total Socket Qty	10pcs Fixed lamp holders
Power supply	Solar panel
Charging time	6.25 hours for solar (when there is enough night), 4.8 hours for Type-C
Connector Type	DC male and female
Lighting time	About 10 hours if power is full
Control wayr	433 remoter
Installation method	Ground plug /Hanging

Safty Certificate	CE, ROHS
Remoter effective distance	10m Without obstacles
Weatherproof Class	IP54
Brightness control	25%~50%~75%~100%
Bulb Type	S14E272700K 3V
Timing	3h~5h~8h~Timeless
Maximum Power per bulb	0.3W
Fuction	8 lighting modes
Item Size	160x144mm
Solar panel voltage and power	5V 2.4W