



Optional features



Specification

Item	Wattage	Voltage	Beam angle	4000K/Lumen	Material	Cutout size(mm)	Size(mm)
ALD-DL2.5HC2-9W	9W	220-240V 100-265V	60°	750LM	PA+ALU; PC	73	90*48
ALD-DL3.5HC2-12W	12W		60°	1055LM		95	120*51
ALD-DL3.5HC2-15W	15W		60°	1350LM		95	120*51
ALD-DL5.0HC2-18W	18W		90°	1600LM		140	170*55
ALD-DL5.0HC2-24W	24W		90°	2100LM		140	170*55



Optional features



Specification

Item	Wattage	Voltage	Beam angle	4000K/Lumen	Material	Cutout size(mm)	Size(mm)
ALD-DLSJ20	4W	220-240V	110°	320LM	PP+PC	60	78*31
ALD-DLSJ23	5W			400LM		70	87*31

Plastic-coated Aluminum SMD Downlight



☒ Optional features



3 CCT




DIM



UGR 25

◆ Specification

Item	Wattage	Voltage	Beam angle	4000K/Lumen	Material	Cutout size(mm)	Size(mm)
ALD-DL2.5QD1-6W	6W	220-240V 100-265V	110°	490LM	PA+ALU; PC	73	92*55
ALD-DL3.5QD1-9W	9W			850LM		90	115*60
ALD-DL3.5QD1-12W	12W			1055LM		90	115*60
ALD-DL4.0QD1-15W	15W			1350LM		110	140*65
ALD-DL6.0QD1-18W	18W			1620LM		150	190*70
ALD-DL8.0QD1-24W	24W			2400LM		200	235*90

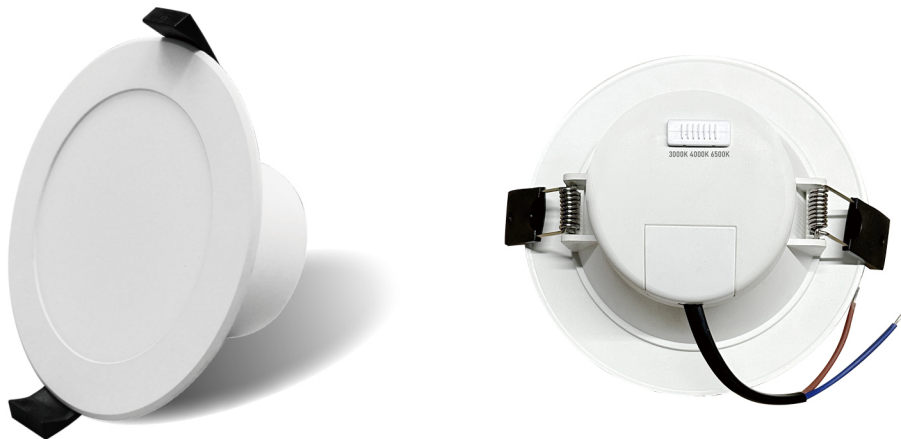

☒ Optional features



3 CCT



DIM



UGR 25

◆ Specification

Item	Wattage	Voltage	Beam angle	4000K/Lumen	Material	Cutout size(mm)	Size(mm)
ALD-DL3.5HC1-9W	9W	220-240V 100-265V	110°	850LM	PA+ALU; PC	90	115*60
ALD-DL3.5HC1-12W	12W			1055LM			

Plastic-coated Aluminum COB Downlight



◆ Specification

☒ Optional features



3 CCT



DIM



UGR < 19
UGR 25

Item	Wattage	Voltage	Beam angle	4000K/Lumen	Material	Cutout size(mm)	Size(mm)
ALD-DL3.5YS2FX-8W	8W	220-240V 100-265V	60°	720LM	PA+ALU; PC	73	90*46
ALD-DL3.5YS2FX-12W	12W		60°	860LM		88	118*46
ALD-DL3.5YS2-8W	8W		110°	720LM		73	90*46
ALD-DL3.5YS2-12W	12W		110°	1055LM		88	118*46



◆◆ Specification

☒ Optional features



Item	Wattage	Voltage	Beam angle	Lumen	Material	Cutout size(mm)	Size(mm)
ALD-DL09W	9W	100-265V	120°	810LM	Die-cast ALU	70-90	100*44
ALD-DL12W	12W			1080LM		90-110	120*44
ALD-DL15W	15W			1350LM		120-140	150*45
ALD-DL18W	18W			1620LM		140-165	175*45
ALD-DL24W	24W			2160LM		160-185	197*51
ALD-DL36W	36W			3240LM		190-220	230*55



☒ Optional features



◆◆ Specification

Item	Wattage	Voltage	Beam angle	Lumen	Material	Cutout size(mm)	Size(mm)
ALD-DL07W	7W	100-265V	60°	630LM	Die-cast ALU	70	90*42
ALD-DL10W	10W			900LM		100	120*42
ALD-DL15W	15W			1350LM		145	165*53
ALD-DL30W	30W			2700LM		200	223*57



◆◆ Specification

☒ Optional features



Item	Wattage	Voltage	Beam angle	4000K/Lumen	Material	Cutout size(mm)	Size(mm)
ALD-SPLYSIFX-8W	8W	220-240V	60°	720LM	PA+ALU; PC	75	90*38
ALD-SPLYSIFX-12W	12W	100-265V		860LM		90	110*40



◆ Specification

☑ Optional features




Item	Wattage	Voltage	Beam angle	4000K/Lumen	Material	Cutout size(mm)	Size(mm)
ALD-SPLYSITJ-8W	8W	220-240V	110°	720LM	PA+ALU;	75	90*38
ALD-SPLYSITJ-12W	12W	100-265V		860LM	PC	90	110*40

Recessed-mounted

Surface-mounted Frame

Surface Panel Light

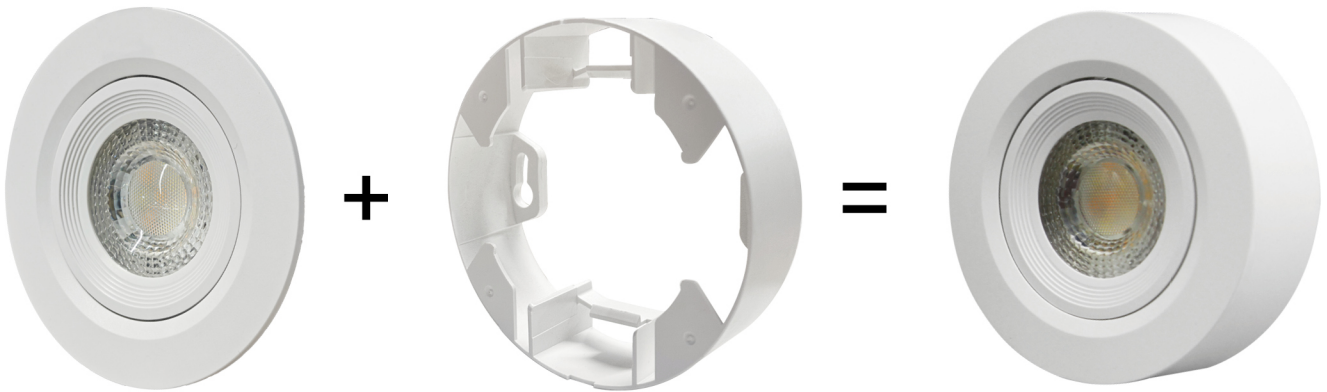


◆ Specification

☑ Optional features



Item	Wattage	Voltage	Beam angle	4000K/Lumen	Material	Cutout size(mm) Recessed-mounted	Size(mm) Recessed-mounted	Size(mm) Surface-mounted
ALD-SPLQD22-5W	5W	220-240V 100-265V	60°	400LM	PA+ALU; PC	Φ70	Φ93*24	Φ93*31

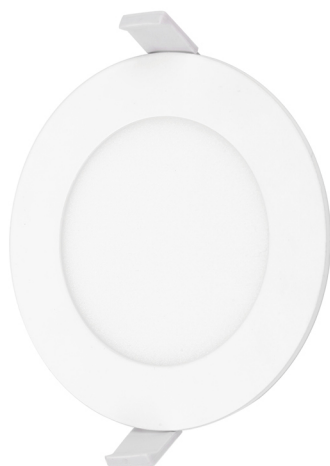

Recessed-mounted



Surface-mounted

◆ Specification

☒ Optional features



Item	Wattage	Voltage	Lumen	Material	Cutout size(mm)	Size(mm) Recessed-mounted	Size(mm) Surface-mounted
ALD-SPL06WR	6W	220-240V	540LM	ALU	Φ105	Φ120*7	Φ120*28
ALD-SPL09WR	9W		810LM		Φ128	Φ148*7	Φ148*28
ALD-SPL12WR	12W		1080LM		Φ150	Φ170*7	Φ170*28
ALD-SPL18WR	18W		1620LM		Φ200	Φ220*7	Φ220*28
ALD-SPL24WR	24W		2160LM		Φ280	Φ300*7	Φ300*28
ALD-SPL30WR	30W		2700LM		Φ280	Φ300*7	Φ300*28
ALD-SPL06WS	6W		540LM		105*105	120*120*7	120*120*28
ALD-SPL09WS	9W		810LM		128*128	148*148*7	148*148*28
ALD-SPL12WS	12W		1080LM		150*150	170*170*7	170*170*28
ALD-SPL18WS	18W		1620LM		200*200	220*220*7	220*220*28
ALD-SPL24WS	24W		2160LM		280*280	300*300*7	300*300*28
ALD-SPL30WS	30W		2700LM		280*280	300*300*7	300*300*28